NOT MEASUREMENT SENSITIVE


MIL-I-3575/2D
23 May 1995
SUPERSEDING
MIL-I-3575/2C
18 September 1991

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, PRESIDENT OF THE UNITED STATES, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified on the solicitation: MIL-I-3575.

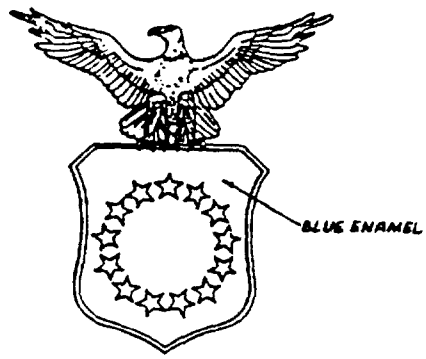

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 16.

DIMENSIONS:
- HEIGHT (Overall): 15/16 inch (2.38 cm) (REF)
- WIDTH (At Wing Tips): 7/8 inch (2.22 cm) (REF)
- THICKNESS (At Thickest Point):
  - SHIELD: 0.078 inch + 0.010 inch - 0 (0.198 cm + 0.025 cm - 0)
  - EAGLE: 0.045 inch + 0.010 inch - 0 (0.114 cm + 0.025 cm - 0)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.
2. Enameled color shall be blue as indicated. The enamel color shall conform to TIOH color chip number 18 or the standard sample:

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:14Z
Check the source to verify that this is the current version before use.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

Custodian:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0794)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:14Z
Check the source to verify that this is the current version before use.