NOT MEASUREMENT SENSITIVE

MIL-I-3575/3C
18 September 1991
SUPERSEDING
MIL-I-3575/3B
15 February 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, VICE PRESIDENT OF THE UNITED STATES, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

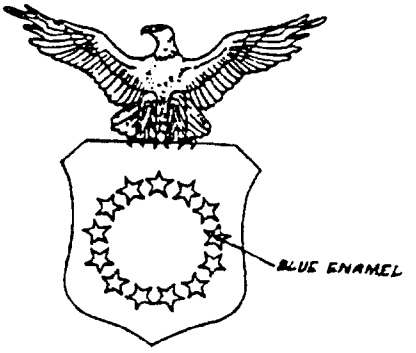

MATERIAL:
-1: Gilding Metal

DIMENSIONS:
HEIGHT: (Overall): 15/16 inch (2.38 cm) (REF)
THICKNESS (At thickest point):
SHIELD: .078 inch + .010 inch - .000 (0.198 cm + 0.025) - .000
EAGLE: .045 inch + .010 inch - .000 (0.114 cm + 0.025 cm) - .000

FINISH: Hard enameled, nickel plated, mirror-like polished

NOTES:
1. Blue enamel shall match TIOH color chip no. 18 or the standard sample.
2. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical centerline, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.
3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
DLA - CT

(Project No. 8455-N615)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:14Z
Check the source to verify that this is the current version before use.