NOT MEASUREMENT SENSITIVE


MIL-I-3575/5B
15 February 1990
SUPERSEDING
MIL-I-3575/5A
31 March 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, SECRETARY AND UNDER SECRETARY OF THE ARMY, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

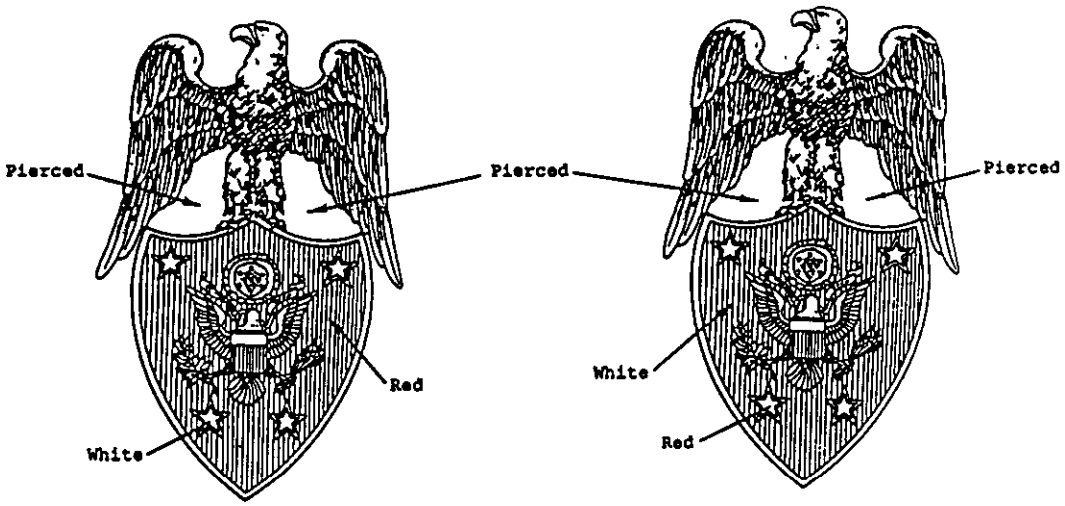

Secretary of the Army

Under Secretary of the Army

-1: Aide, Secretary of the Army, Regular
-2: Aide, Under Secretary of the Army, Regular
-3: Aide, Secretary of the Army, Subdued
-4: Aide, Under Secretary of the Army, Subdued

MATERIAL:
-1, -2: EAGLE AND SHIELD: Gilding metal
DEVICE: Red Brass or Gilding metal
-3, -4: Red Brass or Zinc Aluminum

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inch (3.18 cm) (REF)
THICKNESS (At thickest point): .080 inch ± .005 inch (0.203 cm) ± (0.012 cm)

FINISH:
-1, -2: EAGLE: Gold plated, matte finish with polished highlights
SHIELD: Hard enameled, gold plated, polished edges
DEVICE: Gold plated, matte finish
-3: Dull flat black enamel

-4: Dull flat brown enamel

AMSC N/A FSC 8455 845

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dash no 1 and 2 are identical with the exception of enamel colors for the shield and stars.
2. The device shall be superimposed and secured to the shield by two rivets or soft soldier. When rivets are used, the shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as shown.
3. Enamel areas for dash no. 1 and 2 shall be as indicated. The enamel colors shall match the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
White	28

4. Attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch $\pm$ 1/64 inch (2.22 cm) $\pm$ (0.04 cm) apart.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the shield.
6. The enamel for dash no. 3 shall match chip no. 37038 of FED-STD-595.
7. The enamel for dash no. 4 shall match chip no. 20095 of FED-STD-595.
8. Pierced areas shall be as indicated.

Custodian:
Army - IH

Preparing Activity:
Army - IH

Review Activity:
DLA-CT

Project no. 8455-0447

User Activity:
Army - SM

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:15Z
Check the source to verify that this is the current version before use.