NOT MEASUREMENT SENSITIVE


MIL-I-3575/6B
15 February 1990
SUPERSEDING
MIL-I-3575/6A
31 March 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, SECRETARY OF THE AIR FORCE, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

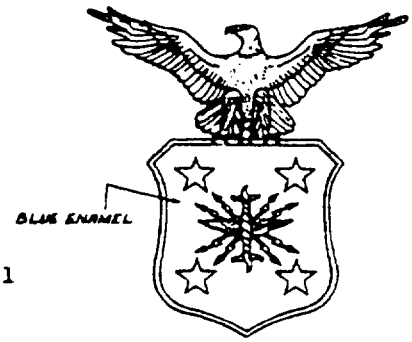

MATERIAL:
SHIELD AND EAGLE: Gilding metal
DEVICE: Red Brass
DIMENSIONS:
SHIELD AND EAGLE:
HEIGHT (Overall): 15/16 inch (2.38 cm) (REF)
THICKNESS (At thickest point):
SHIELD: .078 inch + .010 inch -.000 (0.198 cm) + (0.025 cm) -.000
EAGLE: .045 inch + .010 inch -.000 (0.144 cm) + (0.025 cm) -.000
DEVICE:
HEIGHT (Overall): 1/4 inch (0.64 cm) (REF)
THICKNESS (At thickest point): 0.50 inch + 0.10 inch -.000 (0.127 cm) + (0.025 cm) -.000
FINISH: Nickel plated, silver plated
EAGLE: Oxidized, relieved, matte finish. Highlights polished
SHIELD: Hard enameled. Stars and edges brightly polished
DEVICE: Gold plated, matte finish
NOTES:
1. Blue enamel shall match TIOH color chip no. 18 or the standard sample.
2. The device shall be superimposed on the shield and secured by two rivets or soft solder. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as shown.
3. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm) ± (0.04 cm) apart.
4. The insignia may be made from sterling silver for commercial sale and if so the finish shall be as specified except the nickel and silver plating requirements shall not apply.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the shield.

Custodian:
Air Force - 11
Review activities:
Air Force - 11, 82, 85
DLA - CT

Preparing activity:
Army - IH
Project no. 8455-0447

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:15Z
Check the source to verify that this is the current version before use.