NOT MEASUREMENT SENSITIVE


MIL-I-3575/7D
15 February 1990
SUPERSEDING
MIL-I-3575/7C
26 January 1988

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, CHIEF OF STAFF AND VICE CHIEF OF STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

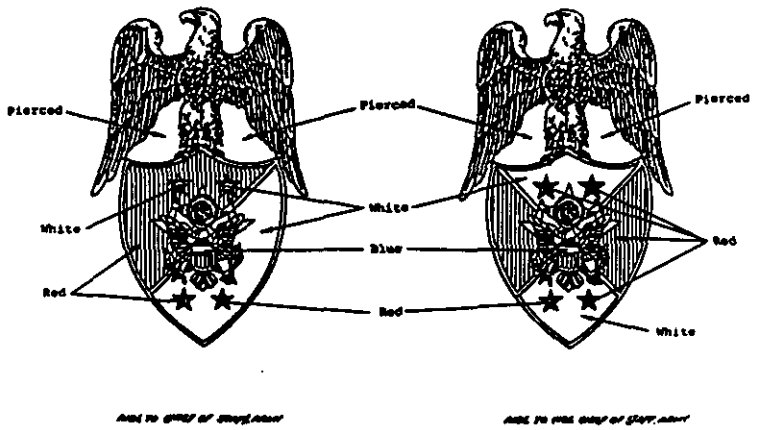

Dash No:
-1: Aide, Chief of Staff, Regular
-2: Aide, Vice Chief of Staff, Regular
-3: Aide, Chief of Staff, Subdued
-4: Aide, Vice Chief of Staff, Subdued

MATERIAL:
-1, & -2: Gilding metal
-3, & -4: Red Brass or zinc aluminum

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT (Overall): 1 1/4 inch (3.18 cm) (REF)
THICKNESS (thickest point): .060 inch ± .005 inch (0.203 cm) ± (0.012 cm)
DEVICE:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
THICKNESS (At thickest point): .060 inch ± .005 inch (0.203 cm) ± (0.012 cm)

FINISH:
-1, & -2: EAGLE: Gold plated, matte finish with polished highlights
SHIELD: Hard enameled, star nickel plated, gold plated, edges polished
DEVICE: Hard enameled, gold plated, matte finish
-3, & -4: Dull flat black enamel

NOTES:
1. The device shall be superimposed and secured to the shield by two rivets or soft solder, when rivets are used, they shall be solid and fabricated from any type brass. The rivets shall be soldered to the vertical centerline of the device. The device shall be located on the insignia as shown.
2. Enameled areas for -1 and -2 shall be as indicated. The enamel colors shall match the TIOH color chips listed below or the standard sample.

COLOR	CHIP NO.
Red	1
White	28
Blue	18

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:15Z
Check the source to verify that this is the current version before use.

3. Attaching device shall be prong and clutch type. The prongs shall be located on the vertical centerline, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm) ± (0.04 cm) apart.
4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the shield.
5. The enamel for dash no. 3 and 4 shall match chip no. 37038 of FED-STD-595.
6. The stripes of the shield for dash no. 1 and 2 shall be enameled with alternating white and red; beginning with white and ending with white. The enamel colors shall match the TIOH color chips listed in note 2.
7. Pierced areas shall be as indicated.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

Project no. 8455-0447

User activities:
DOD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:15Z
Check the source to verify that this is the current version before use.