NOT MEASUREMENT SENSITIVE


MIL-I-3575/7E
14 August 1992
SUPERSEDING
MIL-I-3575/7D
15 February 1990

MILITARY SPECIFICATION SHEET

# INSIGNIA, AIDE, CHIEF OF STAFF AND VICE CHIEF OF STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

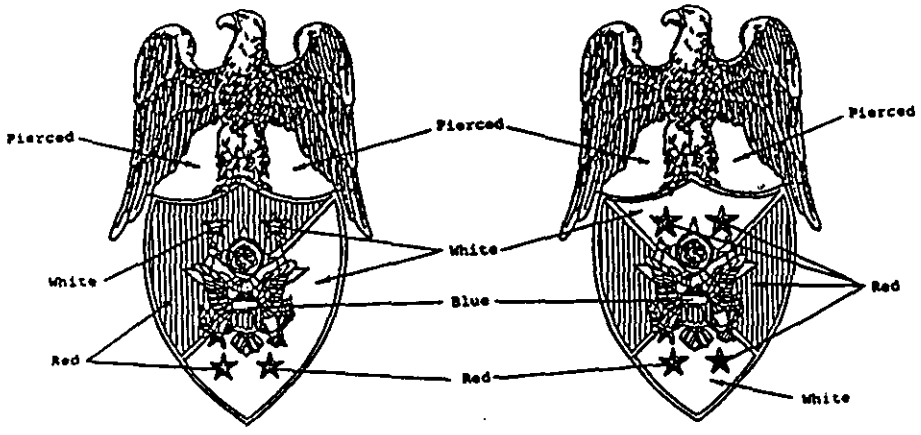


Aide, Chief of Staff  Aide, Vice Chief of Staff

DASH NO.
-1: Aide, Chief of Staff, Regular
-2: Aide, Vice Chief of Staff, Regular
-3: Aide, Chief of Staff, Subdued
-4: Aide, Vice Chief of Staff, Subdued

MATERIAL:
-1, -2: Gilding Metal
-3, -4: Red Brass or Zinc Aluminum

FINISH:
-1, -2: EAGLE : Gold Plated, Matte Finish with Polished Edges and Highlights
SHIELD: Hard Enameled, Gold Plated, Polished Edges except for Star which is Nickel Plated
DEVICE: Hard Enameled, Gold Plated, Matte Finish
-3, -4: Dull Flat Black Enamel

AMSC N/A  FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:15Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

EAGLE AND SHIELD:

HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)

THICKNESS (At Thickest Point on Shield): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

DEVICE:

HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)

THICKNESS (At Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Enameled colors for Dash No. 1 and 2 shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

| COLOR | CHIP NO. |
|---|---|
| Red | 1 |
| Blue | 18 |
| White | 28 |

4. The stripes of the shield for Dash No. 1 and 2 shall be enameled with alternating white and red; beginning with white and ending with white. The enamel color shall match the TIOH color chips listed in Note 3.

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

6. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located on the insignia as indicated.

7. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

8. The enamel for Dash No. 3 and 4 shall match FED-STD-595 Chip No. 37038.

9. Insignia for Dash No. 1 and 2 may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0682)



Source: https://assist.dla.mil -- Downloaded: 202610-16T18:15Z
Check the source to verify that this is the current version before use.