NOT MEASUREMENT SENSITIVE


MIL-I-3575/8B
15 February 1990
SUPERSEDING
MIL-I-3575/8A
31 March 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, CHIEF OF STAFF, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

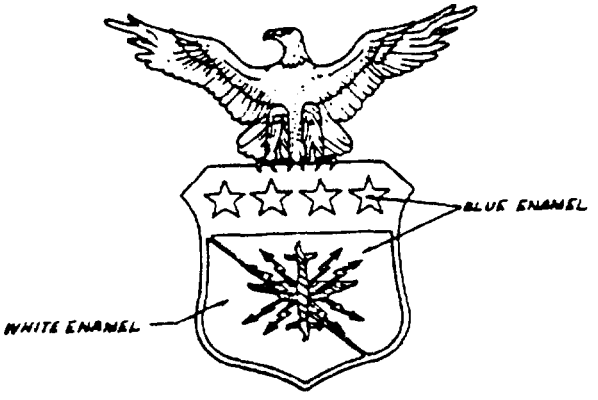

MATERIAL:
SHIELD AND EAGLE: Gilding metal
DEVICE: Red brass

DIMENSIONS:
SHIELD AND EAGLE:
HEIGHT (Overall): 15/16 inch (2.38 cm) (REF)
THICKNESS (At thickest point):
SHIELD: .078 inch + .010 inch -.000 (0.198 cm) + (0.025 cm) -.000
EAGLE: .045 inch + .010 inch -.000 (0.114 cm) + (0.025 cm) -.000
DEVICE:
HEIGHT (Overall): 1/4 inch (0.64 cm) (REF)
THICKNESS (At thickest point): .050 inch + .010 inch -.000 (0.127cm) + (0.025 cm) -.000

FINISH:
EAGLE: Nickel plated, silver plated, oxidized, relieved, matte finish, highlights polished
SHIELD: Hard enameld, nickel plated, silver plated. Chief and edges brightly polished
DEVICE: Gold plated, matte finish

NOTES:
1. Enamel areas shall be as indicated. The enamel colors shall match the TIOH color chips listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	20
White	28

AMSC N/A FSC 8455.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:16Z
Check the source to verify that this is the current version before use.

2. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located as shown.
3. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm) ± (0.04 cm) apart.
4. The insignia may be made from sterling silver for commercial sale and if so the finish shall be as specified except the nickel and silver plating requirements shall not apply.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. When epoxy resin is used rivets shall be used to attach the device to the shield.

Custodian:
Air Force - 11

Preparing activity:
Army - IH

Review Activities:
Air Force - 11, 82, 85
DLA - CT

Project no. 8455-0447

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:16Z
Check the source to verify that this is the current version before use.