NOT MEASUREMENT SENSITIVE


MIL-I-3575/8C
18 September 1991
SUPERSEDING
MIL-I-3575/8B
15 February 1990

MILITARY SPECIFICATION SHEET

# INSIGNIA, AIDE, CHIEF OF STAFF, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

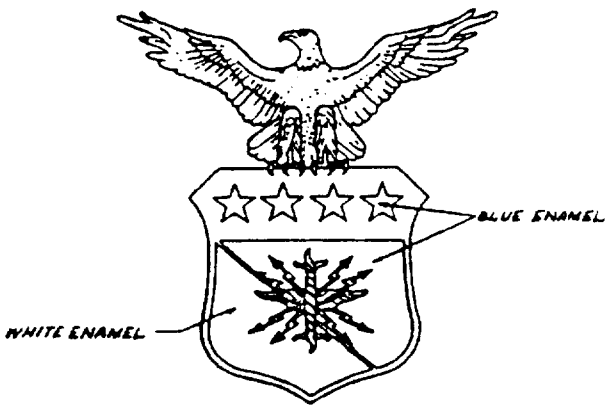


MATERIAL:
SHIELD AND EAGLE: Gilding metal
DEVICE: Red Brass

DIMENSIONS:
SHIELD AND EAGLE:
HEIGHT: (Overall): 15/16 inch (2.38 cm) (REF)
THICKNESS (At thickest point):
SHIELD: .078 inch + .010 inch - .000 (0.198 cm + 0.025) - .000
EAGLE: .045 inch + .010 inch - .000 (0.114 cm + 0.025 cm) - .000

DEVICE:
HEIGHT: (Overall): 1/4 inch (0.64 cm) (REF)
THICKNESS (At thickest point): 0.50 inch + 0.10 inch - .000 (0.127 cm + 0.025 cm) - .000

FINISH:
EAGLE AND SHIELD: Hard enameled, nickel plated, mirror-like polished
DEVICE: Gold plated, mirror-like polished

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:16Z
Check the source to verify that this is the current version before use.

NOTES:

1. Enameled areas shall be as indicated. The enamel colors shall match the TIOH color chips listed below or the standard sample.

| COLOR | CHIP NUMBER |
|---|---|
| Blue | 20 |
| White | 28 |

2. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located as shown.

3. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1.64 inch (1.59 cm ± 0.04 cm) apart.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the shield.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-N615)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:16Z
Check the source to verify that this is the current version before use.