O-M-232F
June 5, 1975
SUPERSEDING
Fed. Spec. O-M-232E
July 30, 1968

FEDERAL SPECIFICATION

METHANOL (METHYL ALCOHOL)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers methanol of synthetic grades and a denaturing grade.

1.2 Classification. Methanol shall be of the following grades, as specified (see 6.2):

1.2.1 Grades.

Grade A - Synthetic, 99.85 percent by weight (solvent use).
Grade AA - Synthetic, 99.85 percent by weight (hydrogen-carbon dioxide generation use).
Grade C - Wood alcohol (denaturing grade).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

L-S-300	- Sheeting and Tape, Reflective; Non-exposed Lens, Adhesive Backing.
TT-C-1060	- Coating, Compound, Reflective.
TT-P-98	- Paint; Stencil, Flat.
PPP-C-96	- Cans, Metal, 28 Gage and Lighter.
PPP-D-729	- Drums, Shipping and Storage, Steel, 55-Gallon.
PPP-P-704	- Pails, Metal: (Shipping Steel, 1 Through 12 Gallon).

FSC 6810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

Federal Standards:

FED. STD. No. 123	- Marking for Domestic Shipment (Civil Agencies)
FED. STD. No. 595	- Colors.
FED. TEST METHOD STD. No. 791	- Lubricants, Liquid Fuels, and Related Products; Methods of Testing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-147	- Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Code of Federal Regulations

Internal Revenue Service, Department of the Treasury:
26 CFR 212 - Formulas for Denatured Alcohol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

(Application for copies should addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Orders should cite "26 CFR 212".)

Department of Transportation:

49 CFR 170-189 - Hazardous Materials Regulations

(Application for copies should be addressed to the Secretary, Hazardous Materials Regulations Board, 400 Sixth Street SW, Washington, DC 20590.)

R. M. Grazianos, Agent

Tariff No. 27 - Hazardous Materials Regulations of the Department of Transportation Including Specifications For Shipping Containers.

(Application for copies should be addressed to R. M. Grazianos, Agent, 1920 L Street, N.W. Washington, DC 20036.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM) Standards:

D 1078 - Distillation Range of Volatile Organic Liquids.
D 1209 - Color of Clear Liquids (Platinum-Cobalt Scale).
D 1296 - Odor of Volatile Solvents and Diluents.
D 1353 - Nonvolatile Matter in Volatile Solvents for Use in Paint, Varnish, Lacquer, and Related Products.
D 1363 - Permanganate Time of Acetone and Methanol.
D 1364 - Water in Volatile Solvents (Fischer Reagent Titration Method).
D 1612 - Acetone in Methyl Alcohol (Methanol).
D 1613 - Acidity in Volatile Solvents and Chemical Intermediates Used in Paint, Varnish, Lacquer, and Related Products.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, DC 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Grades A and AA. Grades A and AA shall conform to Table I.

3.2 Grade C. Grade C wood alcohol (denaturing grade) shall comply with Internal Revenue Service Regulations SDA1 of 26-CFR-212, Formulas for Denatured Alcohols.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The supplier is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of preparation for delivery (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

Table I. Requirements for Grade A and Grade AA.

Characteristics	Grade A		Grade A	
	Requirement	Test para.	Requirement	Test para.
Acetone and aldehydes, percent max.	0.003	4.4.1.2	0.003	4.4.1.2
Acetone, percent max.	-----	-------	0.002	4.4.1.3
Ethanol, percent max.	-----	-------	0.001	4.4.1.3
Acidity (as Acetic Acid) percent max.	0.003	4.4.1.4	0.003	4.4.1.4
Appearance and hydrocarbons	Free of opalescence, suspended matter and sediment	4.4.1.5	Free of opalescence, suspended matter and sediment	4.4.1.5
Carbonizable substances, Color	Not darker than Color Standard No. 30 of ASTM D 1209, Platinum-Cobalt scale	4.4.1.6	Not darker than Color Standard No. 30 of ASTM D 1209 Platinum-Cobalt scale	4.4.1.6
Color	Not darker than Color Standard No. 5 of ASTM D 1209, platinum-cobalt scale	4.4.1.7	Not darker than Color Standard No. 5 of ASTM D 1209, platinum cobalt scale	4.4.1.7
Distillation range	Not more than 1°C and shall include 64.6°C ± .10°C at 760 mm.	4.4.1.8	Not more than 1°C and shall include 64.6°C ± .10°C at 760 mm.	4.4.1.8
Specific gravity, max.	0.7928 at 20°/20°C	4.4.1.9	0.7928 at 20°/20°C	4.4.1.9
Percent methanol by weight, min.	99.85	4.4.1.9	99.85	4.4.1.9
Nonvolatile content, gm/100 ml, max.	0.0010	4.4.1.10	0.0010	4.4.1.10
Odor	Characteristic, non-residual	4.4.1.11	Characteristic, non-residual	4.4.1.11
Permanganate	No discharge of color in 30 minutes	4.4.1.12	No discharge of color in 30 minutes	4.4.1.12
Water, percent max.	0.15	4.4.1.13	0.10	4.4.1.13

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:13Z
Check the source to verify that this is the current version before use.

4.3 Quality conformance inspection.

4.3.1 Lot. A lot shall consist of all methanol of one grade produced in one manufacturing and production operation.

4.3.2 Sampling.

4.3.2.1 Drums and small containers. From each lot, two containers shall be selected at random. From each of the two containers, 1-liter specimens shall be taken and placed in separate, clean, dry glass containers.

4.3.2.2 Tank cars. Samples shall be taken in accordance with FED. TEST METHOD STD. No. 791, Method 8001.

4.3.3 Tests. Samples selected in accordance with 4.3.2 shall be tested as specified in 4.4.1. Failure of any test shall be cause for rejection of the lot from which the sample was taken.

4.4 Inspection procedure.

4.4.1 Tests.

4.4.1.1 Chemical reagents. Wherever chemical reagents are specified in the following tests, analytical reagent grade shall be used.

4.4.1.2 Acetone and aldehydes. Determine the acetone and aldehyde content in accordance with ASTM D 1612. Nonconformance to Table I shall constitute failure of this test.

4.4.1.3 Acetone and ethanol (Grade AA only). Determine the acetone and ethanol content by the elution method of gas chromatography using internal standards as specified below. Nonconformance to Table I shall constitute failure of this test.

4.4.1.3.1 Apparatus and operating conditions. A conventional chromatographic technique utilizing an instrument at least equal in performance to the highest sensitivity range of the Perkin Elmer Vapor Phase Fractometer, Model 154 shall be used. A 2-meter elution column using tetraethylene glycol dimethyl ether (TEDME) or equal as the liquid phase shall be used under the following operating conditions:

Temperature	plus 55° C.
Pressure	Adjust to produce helium flow rate of 80 ml, plus or minus 10 ml.
Sample size	0.20 ml.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:13Z
Check the source to verify that this is the current version before use.

4.4.1.3.2 Quantitative analysis. Internal standards for quantitative analysis curves shall be run on standard specimens prepared by adding pure ethanol or acetone in 0.001 percent by volume increments. The area under the peak is equivalent to the concentration of ethanol or acetone in the specimen. Using a simple ratio, the concentration of ethanol or acetone can be calculated.

4.4.1.4 Acidity. Determine the acidity in accordance with ASTM D 1613. Nonconformance to Table I shall constitute failure of this test.

4.4.1.5 Appearance and hydrocarbons. Dilute 15 ml of the specimen to 45 ml of distilled water in a Nessler tube. Visually examine for cloudiness, opalescence, and sediment during 30 minutes of standing. Nonconformance to Table I shall constitute failure of this test.

4.4.1.6 Carbonizable substances. Pipette 5 ml of the sample into a 20 x 150 mm test tube. Slowly and carefully add 5 ml of concentrated sulfuric acid and swirl the tube gently during the addition. The sulfuric acid shall be no darker in color than the methanol. DO NOT COOL THE MIXTURE. Allow the tube and contents to stand for 5 minutes at room temperature. Examine the contents visually for any evidence of discoloration. Nonconformance to Table I shall constitute failure of this test.

4.4.1.7 Color. Determine color in accordance with ASTM D 1209. Nonconformance to Table I shall constitute failure of this test.

4.4.1.8 Distillation range. Determine the distillation range in accordance with ASTM D 1078, with the following exceptions:

(a) Measure the 100 ml of specimen and distillate at room temperature (without water bath).
(b) Determine temperature using JL-4 type thermometer having a range of 45° to 75° C in increments of 0.1° C.

Nonconformance to Table I shall constitute failure of this test.

4.4.1.9 Specific gravity (methanol content). Determine the specific gravity with a pycnometer of about 50 ml capacity or by any other method accurate to the fourth decimal place. In the temperature range 15° to 25° C, the specific gravity changes 0.00094 per degree centigrade. This correction factor shall be multiplied by the number of °C difference between 20° C and the temperature of the specimen. This resulting number shall be added to the determined specific gravity of the specimen when the temperature is greater than 20° C and subtracted when the temperature is lower than 20° C. Determine the methanol content from the specific gravity based on the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

Percent by weight	Specific gravity at 20°/20° C
99.7	0.79330
99.8	0.79298
99.85	0.79283
99.9	0.79267
100.0	0.79236

Nonconformance to Table I shall constitute failure of this test.

4.4.1.10 Nonvolatile content. Determine nonvolatile content in accordance with ASTM D 1353, except that the specimen shall be 500 ml. Nonconformance to Table I shall constitute failure of this test.

4.4.1.11 Odor. Determine odor in accordance with ASTM D 1296. Nonconformance to Table I shall constitute failure of this test.

4.4.1.12 Permanganate. Determine permanganate in accordance with ASTM D 1363. Nonconformance to Table I shall constitute failure of this test.

4.4.1.13 Water content. Determine water content in accordance with ASTM D 1364. Nonconformance to Table I shall constitute failure of this test.

4.5 Inspection of preparation for delivery.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

Major:

101. Materials, methods, and containers not as specified for Level A or C. Each incorrect material, method, or container shall be considered a defect.
102. Gross weight of wood boxes exceeds 200 pounds for Level A.
103. Gross weight or size of fiberboard boxes exceeds the limitations for Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

104. Marking missing, illegible, incorrect, or incomplete for Level A or C.
105. Special markings missing, illegible, incorrect, or incomplete for Level A or C.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Methanol, in quarts or gallons as specified (see 6.2), shall be packaged Level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Quart container. Methanol shall be packaged in round-shaped quart-size cans conforming to PPP-C-96, Type V, Class 4. Unless otherwise specified (see 6.2), Plan B coating with side seam stripping shall be required in accordance with the referenced specification. The cap shall have a phenolic-faced pulpboard liner. Closure shall be torque controlled with a torque of 20 inch-pounds, with a tolerance of plus zero and minus 5 pounds.

5.1.1.2 Gallon container. Methanol shall be packaged in a round, square, or oblong gallon-sized can conforming to the requirements of 5.1.1.1. In addition, the can shall have a leakproof, tinned-plate pressed-fit inner seal. The cap shall be torqued with a force of 35 inch-pounds, with a tolerance of plus zero and minus 5 pounds.

5.1.2 Level C. Methanol shall be packaged in the quantity specified (see 5.1) in a capped metal can suitable to afford protection against damage and spillage from the supplier to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be Level A or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Quarts and gallons. Methanol in quart and gallon cans shall be packed as specified for "unpackaged cans" in accordance with the appendix to PPP-C-96.

5.2.1.2 Five-gallon pails. When specified (see 6.2), methanol in a quantity of 5 gallons shall be packed in a tight head pail conforming to PPP-P-704, Type I, Class 8. This is the same as DOT-5. (Shipping of methanol is regulated by DOT. For possible air shipment the DOT-5 pail is required.) Closure to be in accordance with DOT-5 and with inner seal. Closure shall be torque-controlled with a torque of 40 inch-pounds with a tolerance of plus zero and minus 5 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

5.2.1.3 Fifty-five-gallon drums. When specified (see 6.2), methanol, in a quantity of 55 gallons, shall be packed in a closed head drum conforming to PPP-D-729, Type I, Class A, and in addition, shall conform to DOT-5A (removable head containers not authorized). The drum closures shall be torque-controlled with 15 foot-pounds ± 2 pounds for the 3/4-inch plug and 30 foot-pounds ± 2 pounds for the 2-inch plug.

5.2.2 Level C.

5.2.2.1 Quarts and gallons. Methanol in quart and gallon cans shall be packed in quantities as specified in 5.2.1.1 to insure carrier acceptance and safe delivery to destination at lowest ratings in containers complying with Uniform Freight Classification rules and National Motor Freight Classification rules.

5.2.2.2 Five-gallon pails. When specified (see 6.2), methanol in 5-gallon pails shall be packed as specified in 5.2.1.2, except that the container shall conform to PPP-P-704, Type I, Class 4, (DOT-17C).

5.2.2.3 Fifty-five-gallon drums. When specified (see 6.2), methanol, in quantity of 55 gallons, shall be packed in a tight head drum conforming to DOT-17C (R.M. Grazianos, Tariff No. 27).

5.3 Marking.

5.3.1 Regular marking. Packages, shipping containers, pails, drums, and palletized loads shall be marked in accordance with FED. STD. No. 123 for civil agencies or MIL-STD-129 for military agencies, as applicable.

5.3.2 Special identification marking on drums and pails. Letters and numerals for NATO Code No., nomenclature, specification number, grade and National Stock Number shall be in blue, approximating Color No. 35109 of FED. STD. No. 595 over yellow reflective background specified in 5.3.2.1. The numerals and letters will be preprinted on yellow reflective sheeting specified in 5.3.2.1.1. Markings on yellow reflective coating shall be applied with stencil paint conforming to TT-P-98, Type I. Identification markings on yellow reflective background will not be overcoated.

5.3.2.1 Fifty-five-gallon drums. An 8-inch-wide band of yellow reflective preprinted sheeting or yellow reflective coating shall be applied across the drumhead and a 6-inch-wide band of yellow reflective preprinted sheeting or yellow reflective coating shall be applied around the top area of the drum sides. The yellow reflective preprinted sheeting shall conform to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

requirements of 5.3.2.1.1, and the yellow reflective coating shall conform to 5.3.2.1.2. The yellow reflective sheeting or coating shall be applied to the drum area of Figures 1 and 2 reserved for NATO Code No., nomenclature, specification number, grade and National Stock Number. NATO Code No., nomenclature, specification number, grade and National Stock Number shall be applied in blue lettering over yellow reflective background on the drumhead. Nomenclature, specification number, grade and National Stock Number shall be applied in blue lettering on yellow reflective background to three sides of the drum (see Figures 1 and 2).

5.3.2.1.1 Yellow reflective preprinted sheeting. The yellow reflective sheeting shall conform to L-S-300, Type I, Class 4, Reflectivity No. 1, Color j. The reflective sheeting shall have a precoated adhesive backing, as specified for Class 4, protected by a removable liner. For ease of application to sides of 55-gallon drums, the 6-inch wide tape may be in three pieces of equal length with the required identification markings centrally preprinted on each piece. The three pieces will be of sufficient length to completely encircle the drum when applied.

5.3.2.1.2 Yellow reflective coating. When a coating compound is used, the compound shall conform to TT-C-1060, approximating Color No. 33538 of FED. STD. No. 595.


5.3.2.2 Five-gallon pails. A 3-inch-wide band of yellow reflective preprinted sheeting or yellow reflective coating shall be applied completely around the top area of pail sides. The sheeting shall conform to 5.3.2.1.1 and the coating to 5.3.2.1.2. The reflective sheeting or coating shall be applied to the pail area as shown on Figure 3 reserved for marking NATO Code No., nomenclature, specification number, grade and National Stock Number. NATO Code No., nomenclature, specification number grade and National Stock Number shall be applied in blue lettering over yellow reflective background on one side of the pail.

5.4 Hazardous materials. The packaged or packed methanol shall comply with CFR, Title 49, Part 170-189 for hazardous materials.

5.5 Poison label. Each container and each palletized load, when applicable, shall be labeled as shown on Figure 4, in addition to any other marking specified herein.

5.6 Palletization. When specified (see 6.2), containers of quart or gallon cans, 5-gallon pails, and 55-gallon drums shall be palletized in accordance with the appropriate load type specified in MIL-STD-147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

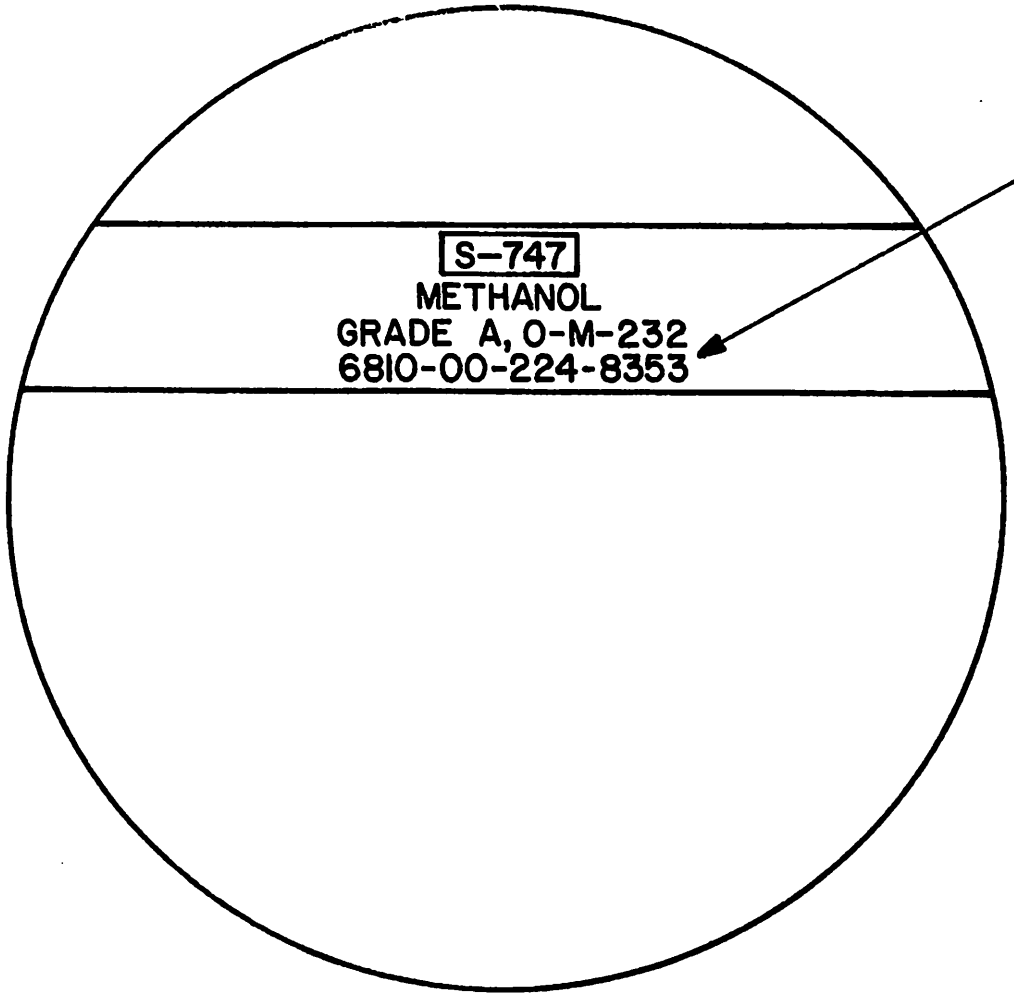


NOTE:
1" BLUE LETTERS AND NUMERALS ON YELLOW REFLECTIVE BACKGROUND

FIGURE 1. SPECIAL IDENTIFICATION ON TOP HEAD OF 55-GALLON DRUM

X-2938

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

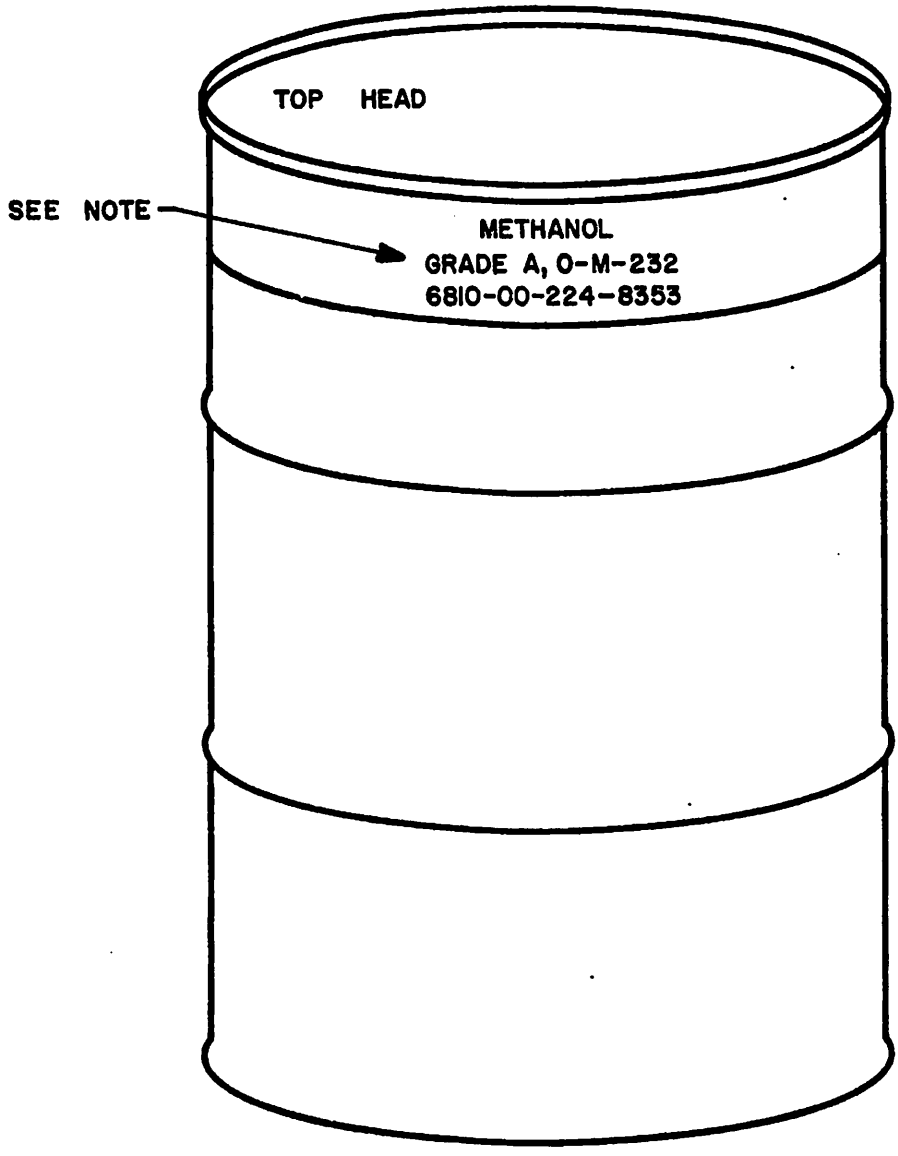


NOTE:
1" LETTERS AND NUMERALS ON 6" WIDE YELLOW REFLECTIVE BACKGROUND. DATA TO APPEAR 3 TIMES AROUND CIRCUMFERENCE OF DRUM

FIGURE 2. SPECIAL IDENTIFICATION OF SIDE OF 55-GALLON DRUM

X-2939

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

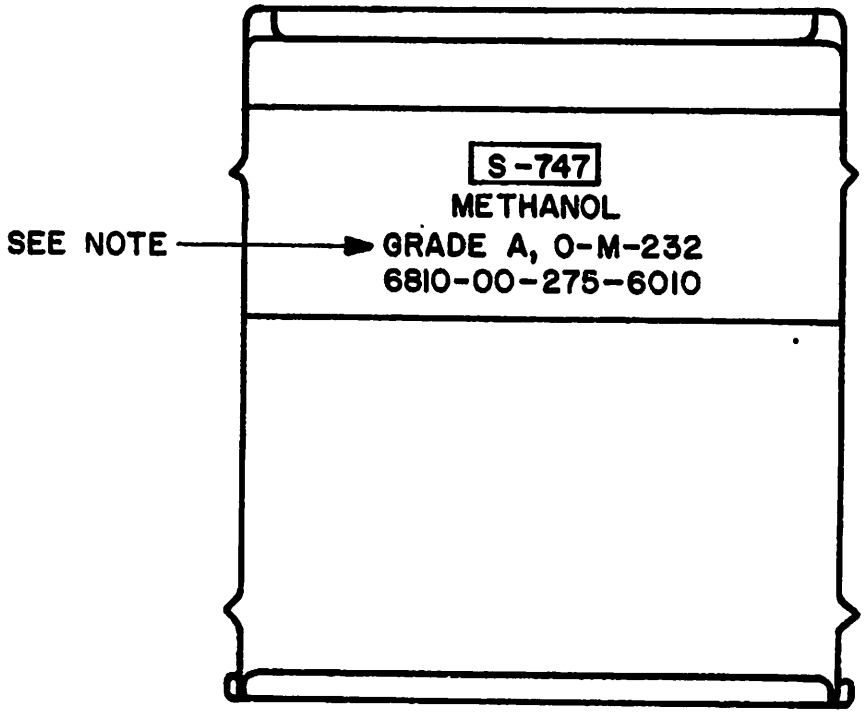

NOTE:

BLUE LETTERS AND NUMERALS ON 3" WIDE YELLOW REFLECTIVE COATING. SIZE OF LETTERS AND NUMERALS IN FIRST LINE IS 3/4", 1/2" FOR THE OTHER THREE LINES.

FIGURE 3. SIDE IDENTIFICATION OF 5-GALLON PAILS

X-2940

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

DANGER! FLAMMABLE
VAPOR HARMFUL
MAY BE FATAL OR CAUSE
BLINDNESS, IF SWALLOWED
CANNOT BE MADE NONPOIS-
ONOUS

Keep away from heat and open flame.

Keep container closed.

Avoid prolonged or repeated breathing of vapor.

Use only with adequate ventilation.



POISON



First Aid ——— Antidote

If swallowed, induce vomiting by any available means - gagging - soapy water - salt solutions - and CALL A PHYSICIAN.
Have patient lie down and keep warm.
Cover eyes to exclude light.

FIGURE 4.—POISON LABEL FOR METHANOL

X-2941

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use.

6.1.1 Grade A. Grade A methanol is intended to be used as industrial solvent.

6.1.2 Grade AA. Grade AA methanol is intended to be used for the generation of hydrogen and carbon dioxide.

6.1.3 Grade C. Grade C wood alcohol is a product of destructive distillation of wood and is intended to be used as a denaturant.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Grade required (see 1.2).
(c) Unit quantity (see 5.1).
(d) Level of packaging and level of packing required (see 5.1 and 5.2).
(e) When Plan B coating with side seam stripping is not required (see 5.1.1.1).
(f) When packing of methanol in 55-gallon drums or 5-gallon pails is required (see 5.2.1.2, 5.2.1.3, 5.2.2.2 and 5.2.2.3).
(g) When palletization is required (see 5.6).

MILITARY INTERESTS:

Custodians:

Army - ME
Air Force - 68

Review activities:

Army - GL, EA, MD, MI, PA
Navy - SA

User activities:

Army - AT, EL, MU
Navy - OS, AS, YD

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS

DOD Project No. 6810-B021

PREPARING ACTIVITY: ARMY - ME

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 40 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:13Z
Check the source to verify that this is the current version before use.