MIL-C-6521 (USAF)
AMENDMENT 2
8 September 1959
Superseding
AMENDMENT 1
16 February 1956

MILITARY SPECIFICATION

CONTROL, INVERTER CHANGEOVER, TYPE A-2

This amendment forms a part of Military Specification MIL-C-6521 (USAF) dated 18 September 1951.

Page 1, paragraph 2.1.1: Delete and substitute:

"SPECIFICATIONS

Military

MIL-M-14	Molding Plastics and Molded Plastic Parts, Thermosetting
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-S-7742	Screw Threads, Standard, Aeronautical
MIL-P-7936	Parts and Equipment, Aeronautical, Preparation for Delivery
MIL-D-70327	Drawings, Engineering and Associated Lists

Standard

MIL-STD-130	Identification Marking of U. S. Military Property"

Page 2, paragraph 2.1.3: Delete.

Page 3, paragraph 3.3.2: Delete "Drawing No. 45B7367" and substitute "figure 1."

Add figure 1. Figure 1 forms page 2 of this amendment.


Page 3, paragraph 3.3.7.2, line 2: Delete "MIL-P-14" and substitute "MIL-M-14."

Page 3, paragraph 3.3.8, line 2: Delete "MIL-P-14" and substitute "MIL-M-14."

Page 4, paragraph 3.5, line 5: Delete "MIL-D-5028" and substitute "MIL-D-70327."

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:09Z
Check the source to verify that this is the current version before use.

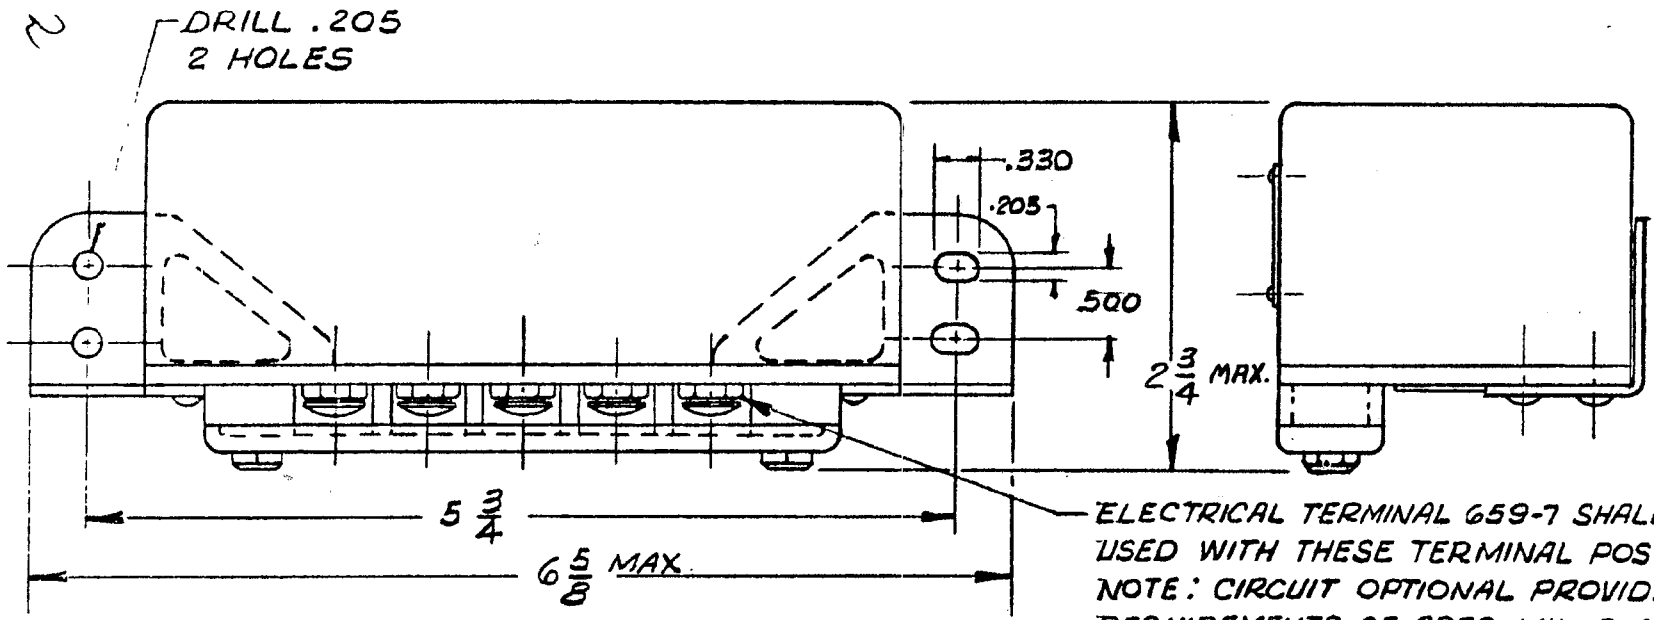


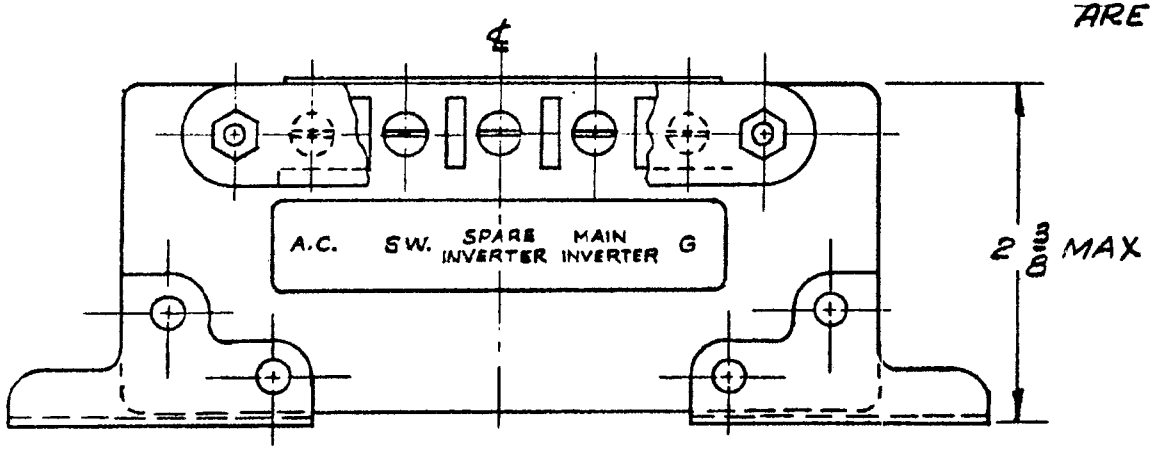


FIG 1
CONTROL-INVERTER CHANGE OVER
TYPE A-2 AUTOMATIC

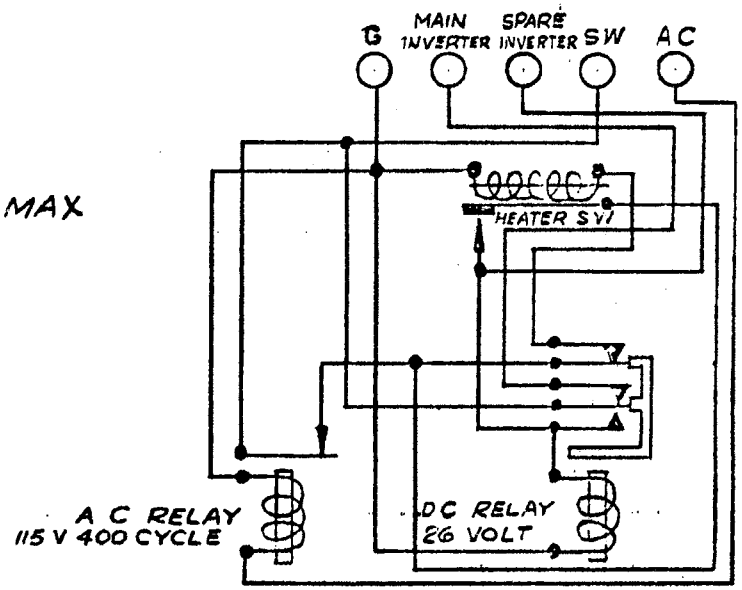

WIRING DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:09Z
Check the source to verify that this is the current version before use.

Page 4, paragraph 3.10, line 2: Delete "Drawing No. 45B7367" and substitute "figure 1."

Page 5, paragraph 3.13, line 2: Delete "AN-S-126" and substitute "MIL-S-7742."

Page 5, paragraph 3.14: Delete "1.1" and substitute "1.32."

Pages 5 and 6, paragraphs 3.16 through 3.16.4: Delete and substitute:

"3.16 Identification of product.- A nameplate, marked in accordance with MIL-STD-130, shall be permanently attached to the control."

Page 8, paragraph 4.3.3.5, third sentence: Delete and substitute: "The ambient temperature shall then be raised and the control tested intermittently for operating voltage characteristics until an ambient temperature of 20° to 30° is attained."

Page 8, paragraph 4.3.3.6, third sentence: Delete and substitute: "The ambient temperature shall then be lowered and the control tested intermittently for operating voltage characteristics until an ambient temperature of 20° to 30° is attained."

Page 11, paragraph 5.2, line 2: Delete "Group V of Specification MIL-P-6064, in a Type II Class I container" and substitute "Specification MIL-P-7936."

Page 11, paragraph 5.3, line 1: Delete "MIL-P-6064" and substitute "MIL-P-7936."

JWS/PAS/cep
WCLE

GPO 825464

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:09Z
Check the source to verify that this is the current version before use.