MIL-O-6438C (USAF)
28 July 1975
SUPERSEDING
MIL-O-6438B (USAF)
6 MARCH 1957

MILITARY SPECIFICATION

OVEN, FOOD WARMING, ELECTRICALLY HEATED, TYPE B-4

1. SCOPE

1.1 Scope. This specification covers one type of electrically heated, food warming oven, designated Type B-4.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-A-250/2	Aluminum Alloy 3003, Plate and Sheet
QQ-A-250/8	Aluminum Alloy 5052, Plate and Sheet
QQ-A-626	Brass, Leaded and Unleaded: Rod, Shapes, Forgings, and Flat Products with Finished Edges (Bar and Strip)
QQ-B-654	Brazing Alloy, Silver
QQ-P-416	Plating, Cadium (Electrodeposited)
QQ-S-763	Steel Bars, Shapes, and Forgings, Corrosion Resisting
QQ-S-766	Steel Plate, Sheets and Strip - Corrosion Resisting
ZZ-R-765	Rubber, Silicone
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-60	Tape, Pressure Sensitive Adhesive, Waterproof, for Packaging

Military

MIL-M-14	Molding Plastics and Molded Plastic Parts Thermositting
MIL-P-116	Preservation, Methods of
MIL-D-1000	Drawings, Engineering, and Associated Lists
MIL-S-5059	Steel, Corrosion-Resistant (18-8), Plate, Sheet and Strip

FSC 7310

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:02Z
Check the source to verify that this is the current version before use.

MIL-W-5088	Wiring, Aircraft, Installation of
MIL-L-10547	Liners, Case, Waterproof
MIL-S-12204	Solder, Aluminum Alloy
MIL-M-13966	Meals, Precooked Frozen
MIL-W-8604	Welding of Aluminum Alloys: Process for

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Table for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-147	Palletized and Containerized Unit Loads, 40" X 48" Pallets, Skids, Runners, or Pallet-Type Base
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-781	Reliability Test Exponential Distribution
MIL-STD-785	Requirements for Reliability Program (for System and Equipment)
MIL-STD-882	Systems Safety Program, for Systems and Associated Subsystems and Equipment; Requirements for
MIL-STD-889	Dissimilar Metals
MS21325	Stud-Style III, Snapslide Fastener
MS21332	Fastener-Snapslide

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

JOINT COMMITTEE ON FOOD EQUIPMENT STANDARDS

National Sanitation Foundation Standard No. 1
National Sanitation Foundation Standard No. 2

(Application for copies should be addressed to the Joint Committee on Food Equipment, Ann Arbor, MI 48106.)

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:02Z
Check the source to verify that this is the current version before use.

3.1 First article. This specification provides for first article testing.

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Materials. The materials used in the construction of the oven shall be of the lightest weight possible and consistent with all of the requirements specified herein. All parts shall be fabricated of materials which are not susceptible to damage of any kind from exposure to extremes of temperature and humidity as well as any other environmental conditions specified herein. Materials that can impart flavor or odor to food or cause any toxic conditions shall not be used. Materials used shall be insect proof and have minimum hydroscopic tendencies. Materials not specified herein shall be the same as used on the manufacturer's standard product.

3.3.1 Fungus-proof materials. Materials that are nutrient for fungi shall not be used where it is practical to avoid them. Where such materials are used and not hermetically sealed, they shall be treated with a suitable fungicidal agent.

3.3.2 Metals. Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service. If corrosion resistant sheet is used, it shall conform to QQ-S-766, Class 301 or 302, condition annealed, or MIL-S-5059. Magnesium or magnesium alloys shall not be used.

3.3.2.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.


3.4 Sanitation. The ovens shall conform to the requirements of the National Sanitation Foundation Standards No. 1 and No. 2.


3.5 Design and construction. The oven shall be designed to operate on either 28 volts DC, two wire, ground power system or 115/208 volt, 400 Hz, 3 phase, 4 wire, "Y" connected with grounded neutral. The oven shall have a minimum number of parts consistent with reliability. The design, where practical, shall permit easy assembly, disassembly, location of trouble sources, and maintenance with tools and equipment normally available commercially. The entire assembly shall provide maximum sanitation and ease of cleaning. The overall design shall conform to Figures 1, 2, and 3.


3.5.1 Outer shell. The outer shell shall be made from 0.032 inch minimum thickness aluminum, conforming to QQ-A-250/8, 5052 or QQ-A-250/2, 3003. The back shall be drawn of one piece 0.051 inch minimum thickness aluminum, conforming to QQ-A-250/8, 5052 or QQ-A-250/2, 3003.

3.5.2 Inner shell. The inner shell shall be made from 0.040 inch aluminum, conforming to QQ-A-250/8, 5052 or QQ-A-250/2, 3003. Suitable glides, made from the same metal shall be provided for supporting the shelves as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:02Z
Check the source to verify that this is the currentversion before use.

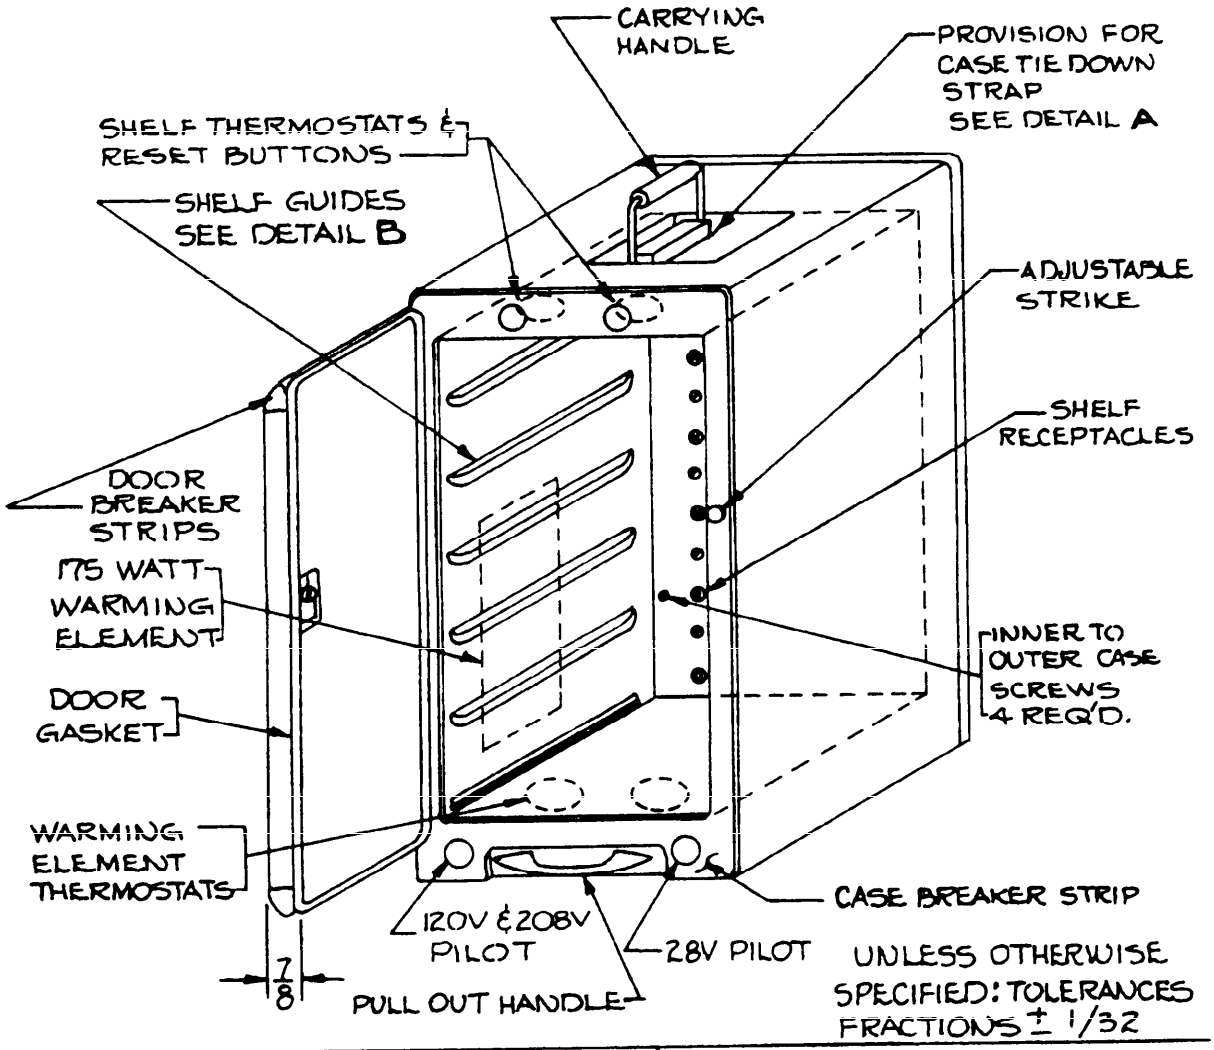

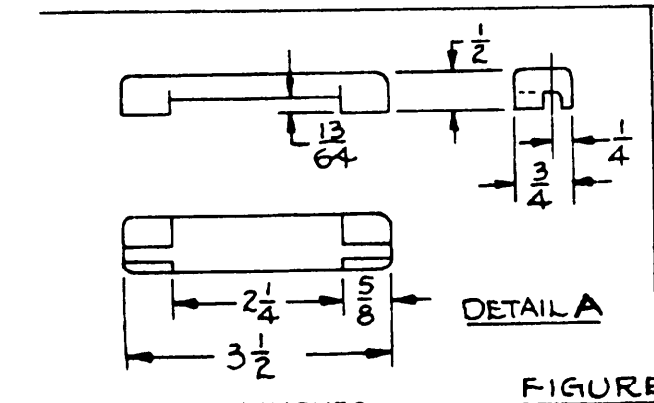


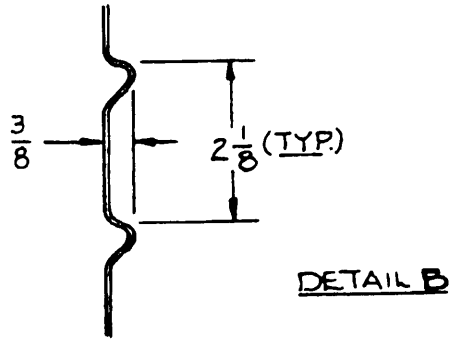


DIMENSIONS IN INCHES

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:02Z
Check the source to verify that this is the current version before use.

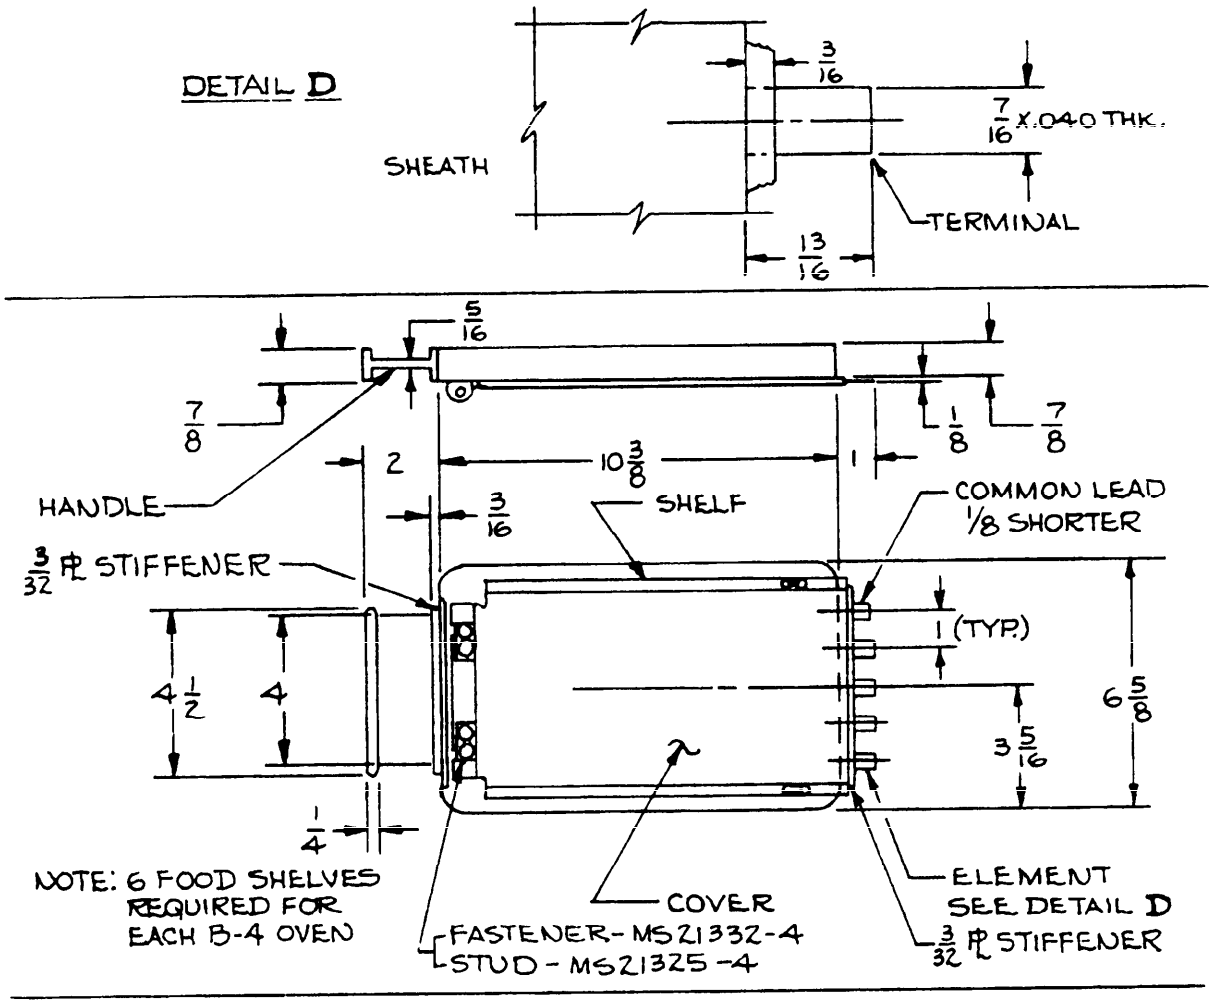

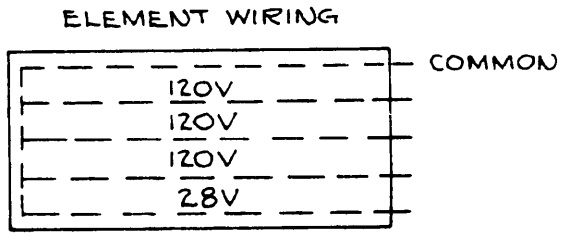

28V - 375 WATT
120V - 375 WATT - SINGLE PHASE
208V - 375 WATT - THREE PHASE


UNLESS OTHERWISE SPECIFIED: TOLERANCES FRACTIONS ± 1/64


DIMENSIONS IN INCHES


DETAIL D

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:02Z
Check the source to verify that this is the current version before use.

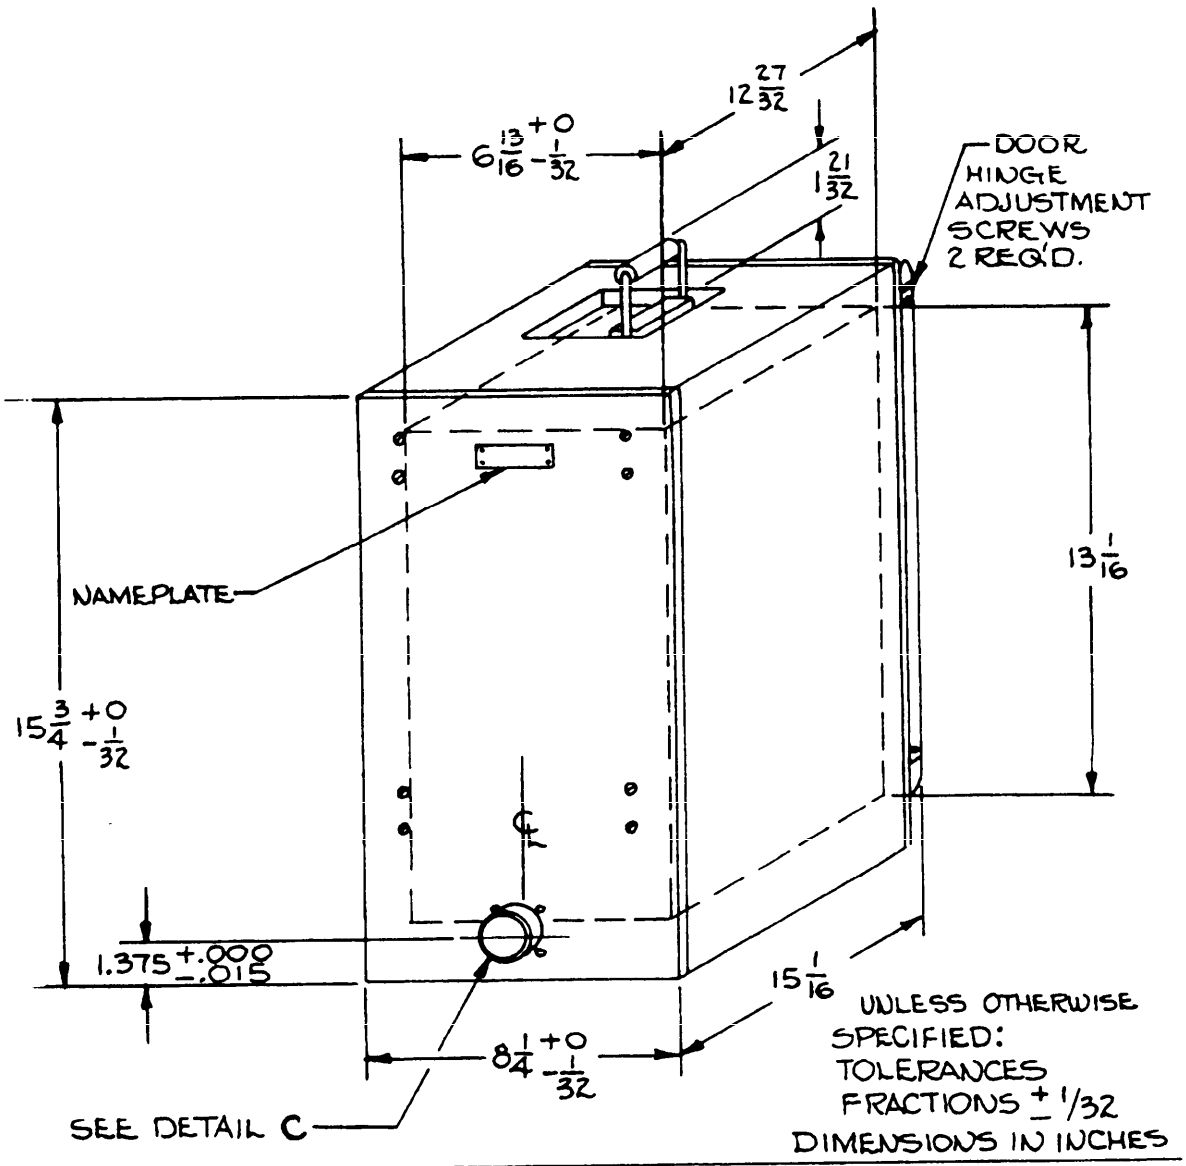





PLUG TO BE EQUAL TO & INTERCHANGEABLE WITH NO. 18471 CANNON ELEC. DEV. CO.

DETAIL C

 FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T07:02Z
Check the source to verify that this is the currentversion before use.

3.5.3 Door. The outer door panel shall be made from 0.032 inch minimum thickness aluminum conforming to QQ-A-250/8, 5052 or QQ-A-250/2, 3003.

3.5.4 Breaker strips. Heat breaker strips shall be located between the inner and outer door and the inner and outer shell to minimize heat conduction. The strips shall be sufficiently rigid to prevent twisting of the inner and outer metallic sections and shall not produce harmful and obnoxious odor. They shall be fabricated from a suitable heat resistant plastic material or laminate.

3.5.5 Door gasket. The door gasket shall be made from rubber conforming to ZZ-R-765. It shall seal tightly against the front of the oven and shall be able to withstand the normal operating temperature of the oven at that location.

3.5.6 Insulation. The interior of the walls and door shall be lined with sufficient insulation to enable the oven to perform satisfactorily. The insulation shall be so arranged that it will remain in place throughout the life of the oven. The insulation material shall have the following properties: light weight, fungus and insect proof, K factor not to exceed 0.28, non packing, minimum hygroscopic tendency, and shock-resistant.

3.5.7 Hardware.

3.5.7.1 Hinge. The door hinge shall be equipped with a continuous type hinge. The door shall be adjustable to control the degree of lightness of the door seal. This may be accomplished by screw slots in the hinge.

3.5.7.2 Latch. The door shall be equipped with a latch and strike which will close the door tightly. It shall be mounted on the case breaker strip. The strike shall be adjustable.

3.5.7.3 Door. The door shall be hung in such a manner that when opened 90 degrees, the oven trays can be removed without interference with the door assembly.

3.5.7.4 Carrying handle. A recessed carrying handle shall be placed in the center of the top of the outer shell. Means shall be provided for a tiedown strap to be inserted through the handle as shown in Figure 1.

3.5.7.5 Pullout handle. A pullout handle shall be located in the center of the front of the breaker strip beneath the door as shown in Figure 1. The handle shall be anchored securely to the oven frame. It shall be fabricated from metal of sufficient strength to support the oven during removal from galley installations.

3.5.7.6 Shelf handle. Each shelf shall be equipped with a handle as shown in Figure 2. The handle shall be fabricated from a heat-resistant, non-metallic or plastic material that produces no harmful or obnoxious odor and shall be of sufficient strength to support the weight of the loaded shelf.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:02Z
Check the source to verify that this is the currentversion before use.

3.5.8 Sealing. The inner door and inner shell, including receptacles in the rear wall, shall be suitably sealed to prevent the escape of moisture into the space between the inner and outer door panels and the inner and outer oven shell.

3.5.9 Expansion and contraction. The oven shall be of such design that repeated expansion and contraction due to heating and cooling shall result in no damage or malfunction of the oven or parts.

3.6 Electrical components.

3.6.1 Elements. The ovens shall be equipped with elements designed for an overage life of at least 5,000 hours.

3.6.1.1 Primary elements. The oven shall be equipped with six shelf mounted, removable primary elements of 375 watts maximum power consumption, as shown in Figure 2.

3.6.1.2 Secondary element. Each oven shall contain one wall-mounted secondary element of 175 watts maximum power consumption, as shown in Figure 1.

3.6.1.3 Thermostats. The oven shall be equipped with snap action thermostats of suitable power rating, capable of breaking the connected load a minimum of 1,000 times.

3.6.1.4 Thermostat restraining screws. Flushhead thermostat retaining screws shall be used in the top of the inner oven case and the inner case shall be counter sunk sufficiently to provide a flush surface.

3.6.1.5 High limit thermostat. A high limit manual reset type thermostat shall prevent overheating in the event of malfunctioning of the primary or secondary thermostat.

3.6.1.6 Primary thermostat. A primary manual adjustable type thermostat shall control the normal heating cycle as described in 3.8.2. The reset button shall extend through the breaker strip behind the top of the door and shall be accessible only when the door is open.

3.6.1.7 Secondary thermostat. The secondary automatic cycling thermostat shall control the hold temperature as described in 3.8.3.

3.6.2 Pilot lights. Two pilot lights shall be mounted in the breaker strip, one on each side of the pullout handle. The pilot light for the 28 volt side shall be equal to and interchangeable with Dial Light Company of America (New York, NY) Part Number 81410-112-313. The 120-208 volt pilot light shall be equal to and interchangeable with Dial Light Company of America (New York, NY) Part Number 81408-137-NE-51. Their function is to indicate that electrical power is being supplied to the primary elements and whether the voltage is 28 volts, 120 volts, or 208 volts.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:02Z
Check the source to verify that this is the currentversion before use.

3.6.3 Receptacles. Receptacles for the six removable shelves shall be provided in the rear wall of the oven as shown in Figure 1. The circuits shall be wired such that each shelf will operate independently when inserted one at a time.

3.6.4 Terminal insulation. Insulation material adjacent to the female receptacles shall be a suitable plastic or laminate.

3.6.5 Plug. The oven shall be equipped with a plug equal to or interchangeable with Cannon Part Number 18471 for attaching the oven to the power source. It shall be mounted as shown in Figure 3.

3.6.6 Wiring. All wire and electrical connections shall be made in accordance with the applicable sections of MIL-W-5088.

3.7 Finish.

3.7.1 Inner and outer cases and breaker strip. The inner and outer cases and the breaker strips shall have a natural, commercial, polished finish.

3.7.2 Plating. All exposed metal parts not made of aluminum or corrosion resistant steel shall be plated in accordance with Type II, Class 2, of QQ-P-416.

3.8 Performance.

3.8.1 Power consumption. The maximum power consumption for any voltage shall not exceed 2425 watts.

3.8.2 High limit. The high limit manual reset thermostat shall disconnect both elements and pilot lights from the electrical power source in the event the oven temperature reaches 320 degrees Fahrenheit due to malfunction of the oven.

3.8.3 Heating cycle. The primary thermostat shall prevent the temperature of the contents of six precooked frozen meals from exceeding 212 degrees Fahrenheit. This will be effected by disconnecting the electrical power from both primary elements and the pilot lights. The primary thermostat shall restore electrical power to the primary elements and pilot lights when manually reset at temperatures below 160 degrees Fahrenheit.

3.8.4 Hold temperature. The secondary automatic reset thermostat shall control the secondary element so as to maintain the hold temperature at 150 degrees Fahrenheit to 160 degrees Fahrenheit within the oven for the period of time that power is supplied to the oven.

3.8.5 Dielectric strength. The oven shall be capable of withstanding without breakdown, the application of a 900 volt, 60 cycle, alternating potential for a period of one minute, between live parts and dead metal parts with the oven at normal operating temperature.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:02Z
Check the source to verify that this is the currentversion before use.

3.8.6 Heating capacity. The oven shall be capable of warming six pre-cooked frozen meals from 30 degrees Fahrenheit to 145 degrees Fahrenheit in 22 minutes or less. After the contents of the meals reach a temperature of 212 degrees Fahrenheit, the oven shall be capable of maintaining the temperature between 150 degrees Fahrenheit and 160 degrees Fahrenheit for the period of time that current is supplied to the oven.

3.8.7 Cooking temperature. The oven shall produce a cooking temperature of not more than 212 degrees Fahrenheit, nor less than 190 degrees Fahrenheit.

3.8.8 Outside surface temperature. The temperature of the outside surfaces of the oven shall not exceed plus 190 degrees Fahrenheit during the cooking cycle.

3.9 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.10 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The drawing number requirements of MIL-D-1000 shall govern changes in the manufacturer's part numbers.

3.11 Weight. The weight of the oven complete with the six shelves shall not exceed 25 pounds.

3.12 Operating instructions. Operating instructions shall be attached to the top of the outside of the door panel.

3.13 Workmanship. The oven shall be neatly finished and all burrs or rough edges shall be removed. Welds shall be sound, smooth and free from pits, fractures and burn through or fissures. Bolt holes shall be accurately punched or drilled and shall have burrs removed. Lockwashers shall be provided in accordance with standard commercial practice. Electrical wiring shall be provided with adequate slack to relieve strain, and the wiring shall not be abraded, poorly joined, or loose at terminals.

3.14 Safety. The oven shall be provided with safe features and devices for the protection of personnel and equipment. Parts which are hazardous to personnel shall be guarded. Equipment and components shall be selected and applied in a manner which is "fail-safe" when possible. When not possible, equipment and personnel shall be separately protected against hazardous failures. Equipment shall be analyzed for category III and category IV hazards as defined by MIL-STD-882. Any hazard so identified shall be brought to the attention of the procuring agency with recommended action for satisfying safety requirements. Action order of precedence shall be as specified in MIL-STD-882, para 5.6.

4. QUALITY ASSURANCE PROVISIONS

4.1 Classification of tests. The inspection and testing of ovens shall be classified as follows:

a. Acceptance test - See 4.2
b. First article testing - See 4.3

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:02Z
Check the source to verify that this is the current version before use.

4.2 Acceptance tests. Acceptance tests shall consist of:

a. Individual tests.
b. Sampling plan and tests.

4.2.1 Individual tests. Each oven shall be subjected to the following tests as described under paragraph 4.5 of this specification:

a. Examination of product.
b. Power consumption.
c. High limit thermostat.
d. Hold temperature.
e. Dielectric strength.

4.2.2 Sampling plan and tests.

4.2.2.1 Sampling plan. One oven shall be selected at random from each lot of 100 or fraction thereof and subjected to the following tests:

a. Heating cycle.
b. Heating capacity.
c. Cooking temperature.
d. Outside surface temperature.

4.2.2.2 Rejection and retest. When one or more items from a lot fail to meet the specification, acceptance of all items in the lot will be withheld until the extent and cause of failure are determined. After corrections have been made, all necessary tests shall be repeated.

4.2.2.3 Individual tests may continue. For production reasons, individual tests may be continued pending the investigation of a sampling test failure but final acceptance of the entire lot shall not be made until it is determined that the lot meets all the requirements of the specification.

4.3 First article testing.

4.3.1 First article test sample. The contractor shall subject one oven to the first article test specified in 4.3.2.

4.3.2 First article tests. First article tests shall consist of all tests described under 4.5 test methods.

4.4 Test conditions.

4.4.1 Atmospheric conditions. Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of 28 to 32 inches of mercury and at a temperature of 77 degrees plus or minus 10 degrees Fahrenheit.

4.4.2 Electrical power. All performance tests of the oven shall be conducted using 28 volts direct current, 120 volts single phase alternating current and 208 volts three phase alternating current.

4.5 Test methods.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T07:02Z
Check the source to verify that this is the current version before use.

4.5.1 Examination of product. Unless otherwise specified by the procuring activity, the ovens shall be sampled in accordance with the provisions of MIL-STD-105 to determine conformance to this specification with respect to materials, workmanship, dimensions, weight and markings.

4.5.1.1 MIL-STD-105. When MIL-STD-105 specifies an action by the Government, it shall, at the option of the Government, be performed either by the Government or by the contractor under the supervision of the Government inspector.

4.5.2 Power consumption. The power consumption of each element and the entire oven shall be determined for each voltage with a wattmeter or other suitable means.

4.5.3 High limit thermostat. The high limit thermostat shall be tested to determine that it will function in case of failure of the primary and secondary thermostats.

4.5.4 Heating cycle. Proper functioning of each primary thermostat shall be tested to determine that they maintain the food within the proper temperature limits.

4.5.5 Hold temperature. The secondary thermostat shall be tested to determine that the secondary element will maintain the food temperature in the oven within the range of plus 150 to plus 160 degrees Fahrenheit for the time current is supplied to the oven.

4.5.6 Dielectric strength. After final assembly the output terminals of a suitable transformer, the output of which can be regulated, shall be connected to the oven case and a jumper which interconnects all terminals of the plug. The potential shall be increased gradually until the test voltage is reached or until breakdown occurs.

4.5.7 Heating capacity. With the oven at an ambient temperature of 77 degrees Fahrenheit, six precooked frozen meals (beef pot roast, menu no. 5 of MIL-M-13966, or a commercial "TV" dinner equal to menu no. 5) that have been stored at minus 10 degrees Fahrenheit shall be heated to an internal (food) temperature of 145 degrees Fahrenheit within 22 minutes.

4.5.8 Cooking temperature. The maximum temperature shall be determined for each meal prepared in the same manner as for the heating capacity test. The maximum temperature in the meals shall be between 190 degrees Fahrenheit and 212 degrees Fahrenheit. This determination may be made on the same cooking cycle as the previous test.

4.5.9 Outside surface temperature. The temperature of the outside surface of the oven shall be determined on each face of the oven. The temperature shall not be greater than 190 degrees Fahrenheit.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:02Z
Check the source to verify that this is the currentversion before use.

5.1.1 Level A. Each oven shall be preserved in accordance with Method III of MIL-P-116 and shall be packaged in a box conforming to Type CF, class weather-resistant, variety DW of PPP-B-636. Utilize PPP-F-320 die-cut fiberboard pads to block ovens within container. Laminate pads to required thickness to ensure that hardware such as handles and knobs are clear of container walls.

5.1.2 Level C. Level C packaging shall be in accordance with manufacturer's standard commercial practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Ovens preserved and packaged as specified in 5.1.1 shall be packed within exterior shipping containers conforming to Type CF, Class weather-resistant, variety DW of PPP-B-636.

5.2.2 Level B. Ovens preserved and packaged as specified in 5.1.1 shall be packed within exterior shipping containers conforming to Type CF, Class domestic, variety DW of PPP-B-636.

5.2.3 Level C. Ovens shall be packed in a manner that will afford adequate protection against corrosion, deterioration and physical damage and shall conform to applicable carrier rules and regulations.

5.3 Palletization. When specified, ovens preserved and packaged as specified in 5.1.1 shall be palletized in accordance with MIL-STD-147 in lieu of shipping containers of 5.2.1 and 5.2.2.

5.4 Marking. Interior and exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. This oven is intended to be used to heat precooked frozen meals, foil pack meals, and food packets, individual, in-flight (cans) in aircraft using 28 volt DC, 120 volt single phase AC and 208 phase AC current.

6.2 Ordering data. Procurement documents should specify the following:

a. First article requirements.
b. Title, number, and date of this specification.
c. List of interchangeable components and assemblies.
d. Selection of applicable levels of preservation and packaging, and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.3).

Custodian:
Air Force - 84

Preparing Activity:
Air Force - 84

Project Number:
7310-F473

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

MIL-O-6438C (USAF)

ORGANIZATION	CITY AND STATE
Warner Robins ALC/MMEME, Robins AFB	Warner Robins, Georgia 31098

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE. AFLC RAFB,GA JUN 67 - 500

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T07:02Z
Check the source to verify that this is the currentversion before use.

FOLD

WARNER ROBINS ALC/MMEME
ROBINS AFB, GA. 31098

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DOD 318

WARNER ROBINS ALC/MMEME
ROBINS AFB, GA. 31098

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:02Z
Check the source to verify that this is the current version before use.