A-A-54097
9 March 1990

COMMERCIAL ITEM DESCRIPTION

# TRUCK, HAND, SHELF

(Surgical Dressing)

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-T-36533 which is cancelled.

This Commercial Item Description covers a surgical dressing hand truck.

Salient characteristics:

The surgical dressing hand truck shall be of the knock-down type, that may be readily set up and dismantled by medical units in the field. The truck shall be fabricated from cold rolled carbon steel, American Iron and Steel Institute (AISI) type 1010 or 1020. The truck shall consist essentially of four tubular uprights fitted with casters, two shelves, and an encircling guard rail for each shelf. Construction shall be in accordance with Figure 1, and as hereinafter specified.

The uprights shall be 1 inch outside diameter tubing having a wall thickness of 0.083 inch. The tops of the uprights shall be capped by welded steel disks. The uprights shall be fitted with 10 inch outside diameter casters. Each caster shall be secured to its upright with two 1/4 inch bolts, acorn nuts, and lockwashers. The bolts shall pass through the caster stem and upright. The nuts shall engage at least four threads when tight.

The casters shall be medium duty wheels with demountable rubber tires. The tires shall be natural, synthetic, or polyurethane rubber. Two swivel and two rigid casters shall be supplied for each cart. The swivel casters shall have ball bearing swivels. The caster stems shall be sized to fit the uprights and shall have clearance holes for bolting to the uprights.

AMSC N/A FSC 6530

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:29Z
Check the source to verify that this is the current version before use.

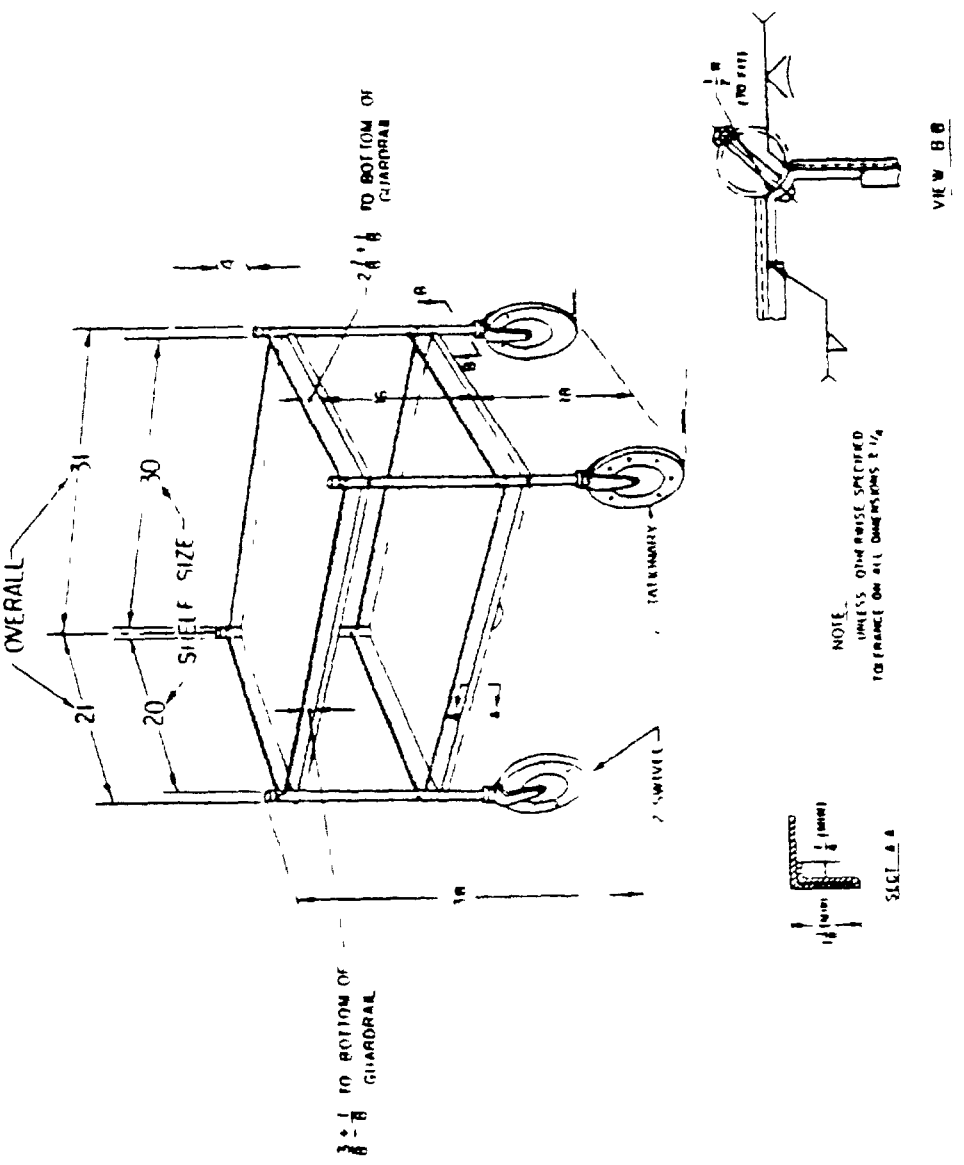



FIGURE 1. Truck, hand, shelf.



Source: https://assist.dla.mil -- Downloaded: 202640-26T09:29Z
Check the source to verify that this is the currentversion before use.

The shelves shall be formed of 0.075 inch thick steel sheet with all edges turned down 1-1/8 inches and returned under the top. The corners shall be notched on a 1/2 inch radius and fitted with a 1/8 inch by 1 inch bar formed to fit the contour of the uprights, as shown in Figure 1, and securely welded to the shelves. The shelves shall be secured to the uprights with 1/4 inch diameter bolts, acorn nuts, and lockwashers, with the bolts passing through the bars, as shown in Figure 1. The nuts shall engage at least four threads when tight.

Each shelf shall have a guard rail composed of four separate lengths of 3/8 inch diameter steel rod threaded on both ends, and each end fitted with an acorn nut and lockwasher. Each section of the guardrail shall be of such length that when the nuts are drawn tight, the rod shall be in tension, thus acting as a brace and adding to the rigidity of the truck. The nuts shall engage at least four threads at each rod end when tight.

The nuts, bolts, and split lockwashers shall be of carbon steel, zinc plated 0.00030 inch thick, and phosphate treated. Screw thread pitch on bolts and nuts shall be selected from the Unified National Course series. All nuts shall be hexagon cap-nut style, having a closed rounded end. The nuts shall have sufficient depth to avoid bottoming. The bolts shall be semi-finished hexagon-head type.

All surfaces to be welded shall be free from grease, oil, oxides, or any other foreign matter. All weld joints shall blend into the adjacent metal in gradual, smooth curves. The weld beads shall be smooth and free of slag, spatter, or excessive undercut. Sufficient metal shall be added to provide a suitable fillet or reinforcement. All welds shall be continuous with no visible voids, pin holes, or cracks which affect the quality. The corner fittings shall be properly aligned and the welds on the face of the corner notches shall be ground smooth to fit flush against the uprights.

All steel parts, except casters, acorn nuts, lockwashers, and bolts shall be subjected to a balanced aqueous solution containing phosphoric acid, zinc, and accelerating agents until a uniform, insoluble, phosphate coating is produced. The phosphate coating shall be followed by an overall coating of synthetic primer, and by two coats of an alkyd base combination air-drying and baking, lustreless, enamel as finishing coats. The color shall be olive drab. The parts shall be baked after each coat to yield a smooth hard finish



Source: https://assist.dla.mil -- Downloaded: 202640-26T09:29Z
Check the source to verify that this is the currentversion before use.

that shall resist cracking and chipping. Baking shall be performed at a temperature of 250°F, or higher, as recommended by the paint manufacturer but not to exceed 350°F. The side plates of the wheels and the caster forks shall be zinc plated 0.00050 inch thick. The coating shall then be followed by a coat of synthetic primer and by two coats of air drying enamel. As an alternate, after casters are plated, a coating of bonderize acid primer followed by two coats of air drying lacquer, shall be applied. The result shall be a bonded finish on the plating. The color shall be olive drab. The nuts, bolts, and lockwashers, after zinc plating, shall have an olive drab film.

The hand truck shall be readily assembled and disassembled. All edges and holes shall be free of burrs and sharpness. The finish shall be free of chipped areas, cracks, scratches, and roughness.

The contractor shall furnish, with each hand truck, two copies each of service data which contains complete instructions for assembly and maintenance and lists of component parts.

Workmanship. The shelf hand truck shall be free from defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One truck, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:29Z
Check the source to verify that this is the current version before use.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for tests. Sampling for tests (dimensional) shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-1. The unit of product for test purposes shall be one shelf hand truck.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:29Z
Check the source to verify that this is the current version before use.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580, as amended, and as implemented by Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

6530-00-774-1075



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:29Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD - MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
PHS
FDA-MPQAS

Project No. 6530-2134

Location:
CID/TRUCK/HAND/SHELF/H13-37



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

---

*(Fold along this line)*

*(Fold along this line)*

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN: DPSC-RSTE
2800 South 20th Street
Philadelphia, Pennsylvania 19101-8419

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:29Z
Check the source to verify that this is the currentversion before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| A-A-54097 | TRUCK, HAND, SHELF |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)* |

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:29Z
Check the source to verify that this is the current version before use.