MIL-B-50856A (PA)
12 September 1975
Superseding
MIL-B-50856 (MU)
14 June 1971

MILITARY SPECIFICATION
BOXES, SET-UP, PACKING, AMMUNITION, INNER AND OUTER FOR SMALL EXPLOSIVE COMPONENTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the quality assurance provisions for one type of packing box for use in packing small explosive components.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-13607 - Padding Materials, Resilient (for Packaging of Ammunition)
*MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components

FSC: 8140

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. ARMY PICATINNY ARSENAL

9258182 - Box, Set-Up, Packing, Ammunition, Inner, for Small Explosive Components
9258183 - Box, Set-Up, Packing, Ammunition, Outer, for Small Explosive Components

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

*(For meaning of asterisk see paragraph 6.5).

3. REQUIREMENTS

3.1 Materials and parts. - Materials and parts shall be in accordance with applicable drawings and specifications.

3.2 Static detonation test. - No inner set-up box other than the one that contained the initiated explosive component shall have any explosive components function when tested as specified.

3.3 Workmanship. - All parts and assemblies shall be fabricated and assembled in a thorough workmanlike manner. They shall be free of blisters, tears, scuffs, and shall have no edges which have not been sharply cut. Surfaces shall contain no dust, lint, or other foreign matter.

3.4 First Article Inspection. - This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for Inspection and Standard Quality Assurance Provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

*4.2 Classification of inspections. - The following types of inspection shall be conducted on this item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

a. First Article Inspection

b. Quality Conformance Inspection

4.3 First Article Inspection.

*4.3.1 Submission. - The contractor shall submit a first article sample (see 6.1b) as designated by the Contracting Officer. The first article shall consist of twenty-five (25) cushions, fillers, spacers, bodies, stiffeners, three hundred and twenty-five (325) inner set-up boxes, twenty (20) outer set-up boxes into which the inner set-up boxes are designed to fit, and fifteen thousand (15,000) explosive components of one type for which the inner set up boxes are to be used. These explosive components are to be furnished by the Government for the performance of the static detonation test (see 6.4). The first article sample shall be evaluated in accordance with the provisions of 4.3.2 and 4.3.3.

*4.3.2 Inspection to be performed. - See MIL-A-48078 and paragraphs 4.4.2.1 thru 4.4.2.8, testing per para. 4.4.3, and Table I specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
*	Boxes, Set-up, Packing, Ammunition, Inner and Outer				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Parts (Dwg. 9258182) Cushions, fillers, spacers, bodies, stiffeners.				
	Examination for Defects	25(a)		3.1	4.4.2.1 to 4.4.2.7
	Outer set-up boxes (dwg. 9258183)				
	Examination for Defects	20		3.1	4.4.2.9
	Inner set-up boxes (Dwg. 9258182)				
	Examination for Defects	25		3.1	4.4.2.8
	Static detonation test	300(b)		3.2	4.4.3.1
	Explosive components	15,000(c)		3.2	4.4.3.1
	Notes: (a) 25 of each item listed (b) 100 test assemblies of 3 inner set-up boxes each (c) Furnished by Government				

NOTES

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

*4.3.3 Rejection. - (See MIL-A-48078)

4.4 Quality Conformance Inspection.

*4.4.1 Inspection Lot Formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

*4.4.2 Examination. - (See MIL-A-48078) Unless otherwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-B-50856A(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
*4.4.2.1	Filler				9258182
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major B					
131	Thickness		0.40%	3.1	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
#4.4.2.2	Stiffener				9258182
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major B					
131	Thickness		0.40%	3.1	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES-

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
*4.4.2.3	Spacer				9258182
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Rough finish on wrong side		100.0%	3.1	Visual
Major A					
101	Length		0.40%	3.1	Gage
102	Width		0.40%	3.1	Gage
103	Diameter of explosive component holes, 50 places		0.40%	3.1	Gage
104	Diameter of registry holes, 2 places (when applicable)		0.40%	3.1	Gage
105	True position of explosive component holes		0.40%	3.1	Gage
106	True position of registry holes (when applicable)		0.40%	3.1	Gage
107	Thickness		0.40%	3.1	Gage
108	Explosive component holes blocked or partially blocked by counterbore holes (when applicable)		0.40%	3.1	Visual
Minor					
201	Counterbore missing		0.65%	3.1	Visual
202	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Cushion Prior to Assembly to Filler				9258182
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major B					
131	Length of cushion		0.40%	3.1	Gage
132	Width of cushion		0.40%	3.1	Gage
133	Thickness of cushion		0.40%	3.1	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Filler and Cushion Assembly				9258182
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major B					
131	Length of assembly		0.40%	3.1	Gage
132	Width of assembly		0.40%	3.1	Gage
133	Thickness of assembly		0.40%	3.1	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-50856A (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
*4.4.2.6	Body, Prior to Assembly of Spacer		9258182
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major B					
131	Inside length		0.40%	3.1	Gage
132	Inside width		0.40%	3.1	Gage
133	Outside height		0.40%	3.1	Gage
134	Thickness		0.40%	3.1	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
*4.4.2.7	Body, After Assembly of Spacer				9258182
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Spacer assembled 180 degrees from proper position		100.0%	3.1	Visual
2	Spacer assembled with wrong (rough) side up		100.0%	3.1	Visual-Manual
Major B					
131	Registry holes blocked or partially blocked by body (when applicable)		0.40%	3.1	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
*4.4.2.8	Box, Set-up, Inner				9258182
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Color coding improperly located		100.0%	3.1	Visual
Major A					
101	Component missing		0.40%	3.1	Visual
102	Edges of paperboard not clean cut		0.40%	3.1	Visual
Minor					
201	Marking missing, incomplete or illegible		0.65%	3.1	Visual
202	Evidence of poor workmanship other than specified above		1.00%	3.3	Visual

NOTES

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9258183
*4.4.2.9	Box, Set-up, Outer				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major B					
131	Inside width, min.		0.40%	3.1	Gage
132	Inside depth, min.		0.40%	3.1	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-B-50856A (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
*4.4.2.10	Sealed Outer Set-up Box				9258183
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major B					
131	Box damaged so that contents are exposed or likely to become exposed		0.40%	3.1	Visual
Minor					
201	Marking missing, incomplete or illegible		0.65%	3.1	Visual
202	Evidence of poor workmanship		1.00%	3.3	Visual

NOTES

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

4.4.3 Testing.

*4.4.3.1 Static detonation test (see 3.2) - Critical defect - One hundred and twenty (120) inner set-up boxes shall be selected from each lot and assembled into forty test assemblies of three (3) inner set-up boxes each for this test. If one or more of the set-up boxes in any assembly fail to comply with the applicable requirement, the inner set-up box lot shall be rejected. The test shall be performed as specified in 4.5.1. (see 6.4) For reduced sampling see 6.4.1.

*4.4.3.2 Thickness of cushion (see dwg. 9258182) - Major A defect - Forty (40) cushions shall be selected from each lot of cushions for this test. Using these forty (40) cushions, five (5) test assemblies of eight (8) cushions each shall be made. If the average thickness for any assembly fails to meet the applicable drawing requirement, the lot shall be rejected. The test shall be performed as specified in 4.5.2.

*4.4.4 Inspection Equipment. - The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the 'Paragraph Reference/ Inspection Method' column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and section 6.2 herein.

4.5 Test Methods and Procedures.

4.5.1 Static detonation test. - Each test assembly shall consist of three (3) inner set-up boxes loaded with explosive components for which the boxes are to be used, assembled with release paper when required, and then wrapped firmly together with masking tape. Prior to assembly one unloaded inner set-up box (see Figure 1) shall be drilled through the bottom of the slide cover and then the body to expose one hole. The exposed hole shall be in the third row of holes and in the fifth or sixth column of holes. Another inner set-up box shall be drilled completely through so that the hole in it lines up with the hole drilled in the other inner set-up box. The drilled hole shall be of sufficient size to accomodate the stab type firing pin used for this test. The three inner set-up boxes shall be loaded with the applicable explosive item and taped together to form the test assembly. The three loaded inner

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

set-up boxes (box with through hole, first, box with sensitive end of explosive item showing, second, and unmodified box, third) shall be taped together, by alternating diagonally the red and black markings, so that the holes in the two modified inner set-up boxes are aligned. For items which are stab-initiated, the package shall be placed in a fixture and a firing pin remotely installed in the drilled hole. For relays and items which are flash initiated, an M55 stab primer and firing pin shall be remotely installed in the drilled hole. A ball weight shall then be dropped on the firing pin. The weight of the ball and the height of drop shall be such as to impart the minimum amount of energy to the firing pin to assure satisfactory functioning. The two inner set-up boxes adjacent to the one which contained the initiated item shall be examined for evidence of any other items which functioned. The explosive components used in each test assembly shall not be re-used in a subsequent test. Parts and assemblies subjected to this test shall not be returned to the lot. (Destructive Test)

4.5.2 Thickness of cushion. - Each test assembly shall be conditioned and tested as specified in MIL-P-13607A (MU) except that the total weight of the top plate shall be such as to provide a bearing pressure of between 0.37 and 0.38 pounds per square inch. Observation shall be made for compliance with the applicable drawing requirement.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing, Level C. - Unless otherwise specified, the inner set-up boxes shall be assembled in outer set-up boxes in the quantities required by dwg. 9258183. Outer set-boxes shall be packaged and packed in accordance with MIL-STD-1169.

5.2 Marking. - Marking shall be in accordance with MIL-STD-1169.

6. NOTES

*6.1 Ordering Data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

b. Provisions for submission of first article samples.

c. Provisions of MIL-A-48078.

*6.2 Submission of Inspection Equipment Designs for Approval. (See MIL-A-48078). Submit equipment designs as required, to Commander: Picatinny Arsenal, ATTN: SARPA-QA-T-T Dover, New Jersey 07801.

*6.3 Distribution of ammunition data cards. - Distribution of data cards shall include the following: Commander, Picatinny Arsenal, ATTN: SARPA-QA-A-M Dover, New Jersey 07801.

6.4 Static detonation test. - The performance of the static detonation test requires the use of explosive components which are not a part of this specification. Contractual documents should make provisions for furnishing the explosive components to the contractor or other approved testing facility.

*6.4.1 Reduced sampling. - The detonators, primers and other items listed in Table II are the only ones for which reduced sampling is permitted.

TABLE II

Item	Specification	Inner Set-Up Boxes	Sample Size	Test Assemblies
M2 Delay Element	MIL-D-48116	15	750	5
M9 Relay	MIL-R-46204	15	750	5
M17 Detonator Flash	MIL-D-46406	15	750	5
M24 Detonator, Stab	MIL-D-46256	15	750	5
M26 Primer Stab	MIL-P-60049	15	750	5
M35 Detonator, Flash	MIL-D-46207	15	750	5
M42 Detonator, Stab	MIL-D-60362	15	750	5
M44E1 Detonator, Stab	MIL-D-46209	15	750	5
M55 Detonator, Stab	MIL-D-14978	15	750	5
M56 Primer, Stab	MIL-D-48760	15	750	5
M61 Detonator, Stab	MIL-D-45441	15	750	5
M63 Detonator, Stab	MIL-D-13670	15	750	5
M76 Detonator, Stab	MIL-D-50998	15	750	5
M80 Detonator, Flash	MIL-D-14140	15	750	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.


*6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army-PA

Preparing Activity:
Army-PA

Project Number: 8140-A-148

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

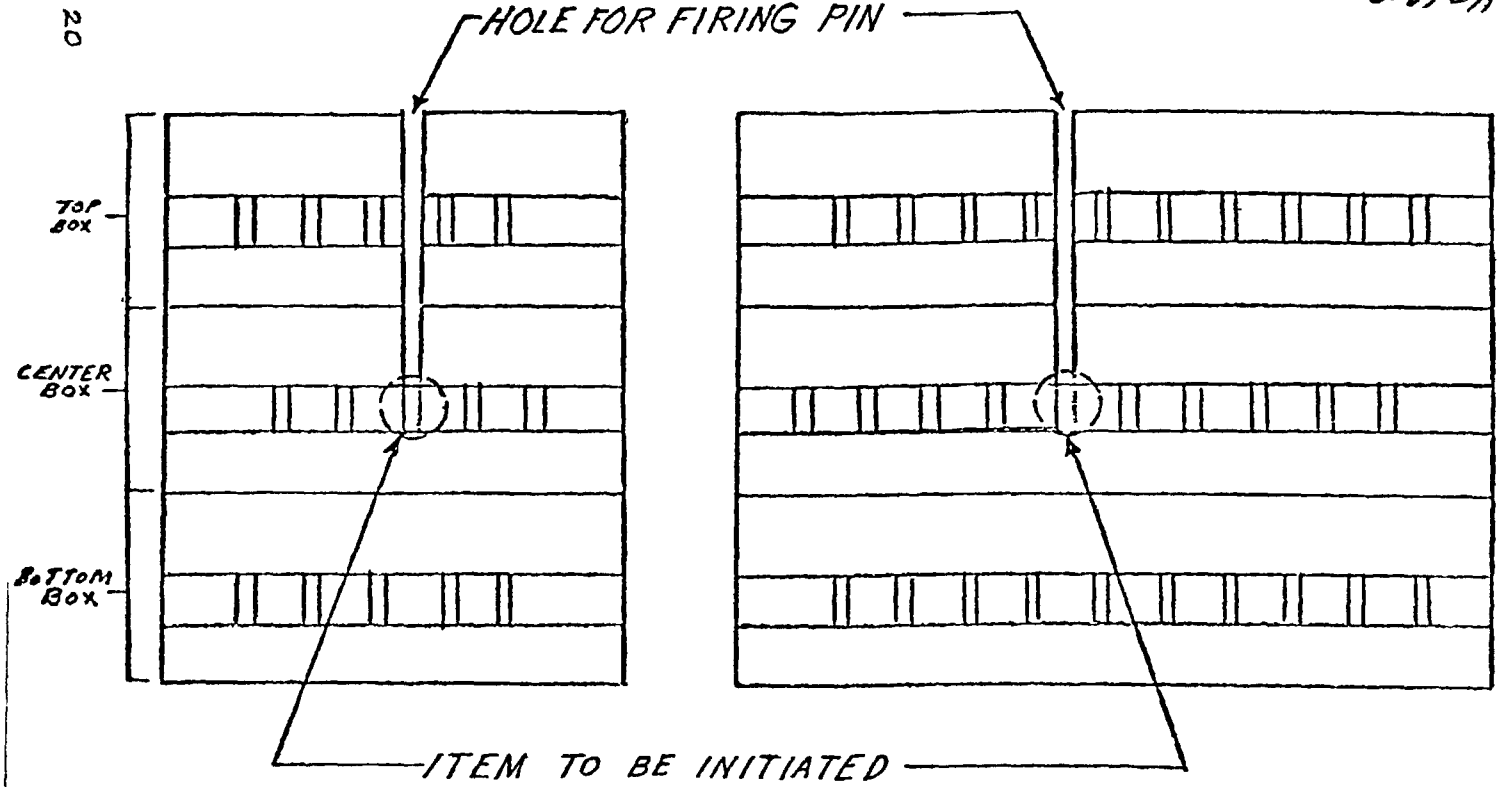

SKETCH OF TEST ASSEMBLY
for
STATIC DETONATION TEST

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-A
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:40Z
Check the source to verify that this is the current version before use.