MILITARY SPECIFICATION

CONTROL PANEL ASSEMBLY FOR M130 DISPENSER SYSTEM

This Specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This Specification covers the performance and acceptance inspection requirements for the Dispenser Control Panal associated with the M130 Aircraft General Purpose Dispenser System.

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-45743	- Soldering Manual Type, High Reliability, Electrical and Electrical Equipment
MIL-S-46844	- Solder Bath Soldering of Printed Wiring Assemblies
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes

FSC 1345

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

MIL-STD-810C - Environmental Test Methods

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.5)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER (ARDC)

9272533 - Dispenser Control Panel Assembly
9321931 - Packing and Marking for Box, Exterior For Panel, Dispenser Control: M130
9313708 - Packing and Marking for Drum, Metal, Shipping for M130 Aircraft General Purpose Dispenser

INSPECTION EQUIPMENT DRAWINGS

9280366 - Test Set-Up for Burn-In Test/Alternate Method I, with Internal Pulse Generator In DCPIT (Dispenser Control Panel)
9280371 - Test Set-Up For Functional Test (Dispenser Control Panel)

U.S. ARMY ARMAMENT, MUNITIONS AND CHEMICAL COMMAND

19-48-4138/109-20 PA1000 - Unitization Procedures for Boxed Ammunition and Components on Skidded Bases

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the Contracting Officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings, specifications and standards.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on drawing 9272533 and all associated drawings and with all requirements specified in applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

3.3 Functional requirements. The control panel having successfully completed burn-in (see 4.5.7), shall perform as specified herein.

3.3.1 Power up. The control panel shall perform as specified herein when powered up to a voltage of 22.5-30 VDC.

3.3.2 Safe/arm. The control panel shall output a 0 VDC and a 22.5-30 VDC Chaff/Flare Arm Signal when the safe/arm switch is in the safe and arm positions respectively. The arm light shall be lit when the safe/arm switch is in the arm position.

3.3.3 Chaff manual/program. The control panel shall output a chaff manual and chaff program signal in response to an appropriate chaff dispense signal, when the chaff manual/program switch is in the manual and program positions respectively.

3.3.4 Flare ripple fire. The control panel shall output a 22.5-30 VDC Flare Ripple fire signal when the ripple flare switch is in the up position.

3.3.5 Flare/chaff count. The flare and chaff counters shall step down once (unless the counters are on 0) upon input of a flare or chaff count signal conforming to Figure 1.

3.4 Environmental requirements. The control panel shall perform as specified in 3.3 after exposure to the environments specified herein.

3.4.1 Helicopter vibration. The control panel shall perform all functions satisfactorily after being subjected to MIL-STD-810C, Test Method 514.2, Procedure I, Part 1, Category 6 using curve C of Figure 514.2-2 and curve M of Figure 514.2-3.

3.4.2 Transportation vibration. The control panel shall perform all functions satisfactorily after being subjected to MIL-STD-810C, Test Method 514.2, Procedure X using curve AW of Figure 514.2-7 (change curve to 0.8" displacement (double amplitude) between 5&6 Hz).

3.4.3 Shock. The control panel shall perform all functions satisfactorily after being subjected to MIL-STD-810C, Test Method 516.2, Procedure I, using peak value (a) and nominal duration (c) in Figure 516.2-1.

3.4.4 Low temperature. The control panel shall perform all functions satisfactorily at -65°F (-54°C) according to MIL-STD-810C, Test Method 502.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

3.4.5 High temperature. The control panel shall perform all functions satisfactorily at +160°F (71°C) according to MIL-STD-810C, Test Method 501.1.

3.5 Functioning. The control panel after successfully completing burn-in as specified in 4.5.7 shall pass the functioning test (See 4.5.1).

3.6 Wiring and soldering. Soldering of electrical wires, cables, connectors, components and assemblies shall be performed in a thorough, workmanlike manner in accordance with MIL-S-45743 and MIL-S-46844.

3.7 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.8 Workmanship. All parts and assemblies shall be fabricated and finished in a thorough workmanlike manner, and all manufacturing, processing, and assembling operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil (except where specifically required), corrosion products, solder splash and other foreign matter. The cleaning method used shall not be injurious to any part or assembly, nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat and sharply defined. Required packing shall be dry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

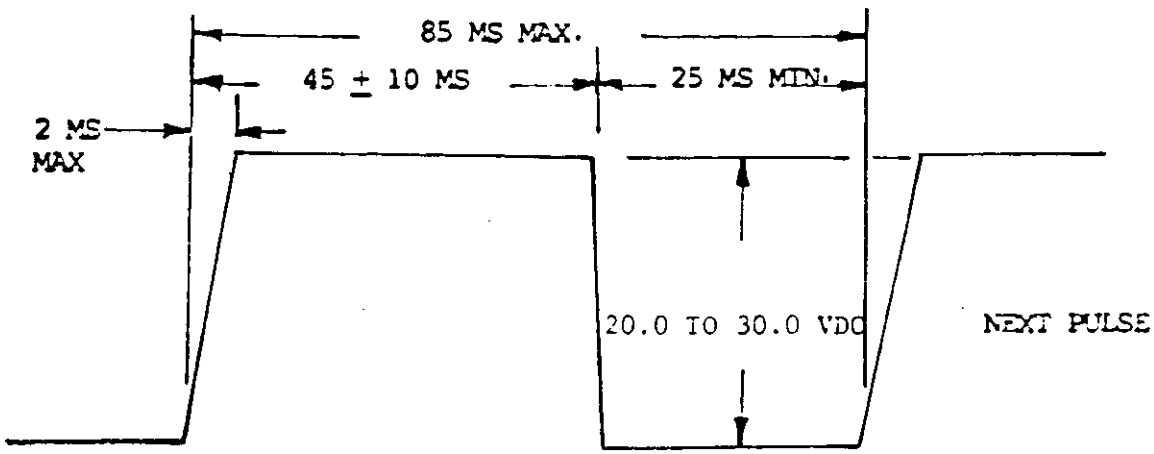


Figure 1 Count signal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection and standard quality assurance provisions. Unless otherwise specified herein, or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspections shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2 and 4.3.3. The first article sample shall consist of the items in sample quantities as indicated in Table I.

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE: Dispenser Control Panel Assembly		SHEET 1 OF 2	DRAWING NUMBER: See Below
				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH / PARAGRAPH REFERENCE /INSPECTION METHOD
	Box (Dwg. 9321320) Examination for defects	5		3.2 / 4.4.2.1
	Counter Buffer Circuit Assembly (Dwg. 9313670) Examination for defects	5		3.2 / 4.4.2.2
	Panel, Front (Dwg. 9310960) Examination for defects	5		3.2 / 4.4.2.3
	Panel, Rear (Dwg. 9310961) Examination for defects	5		3.2 / 4.4.2.4
	Panel, Edge Lighting (Dwg. 9272532) Examination for defects	5		3.2 / 4.4.2.5
	Front and Rear Panel Assembly (Dwg. 9321318) Examination for defects	5		3.2 / 4.4.2.6

NOTES: The five samples in each of the above assemblies are not destructively tested and may be used as deliverable items upon completion of first article tests if approved in the contract.

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-C-48890B(AR)

PARAGRAPH	TITLE: Dispenser Control Panel Assembly		SHEET 2 OF 2	DRAWING NUMBER: See Below
				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH / PARAGRAPH REFERENCE /INSPECTION METHOD
	Dispenser Control Panel Assembly (Dwg. 9272533)			
	Examination for defects	2(b)		3.2 / 4.4.2.7(a)
	Functioning Test	2		3.4 / 4.5.1
	Burn-in	2		3.4 / 4.5.7
	Low Temperature Test	2		3.3.4 / 4.5.2
	High Temperature Test	2		3.3.5 / 4.5.3
	Transportation Vibration Test	2		3.3.2 / 4.5.4
	Helicopter Vibration Test	2		3.3.1 / 4.5.5
	Shock Test	2		3.3.3 / 4.5.6
	Examination for defects	2		3.2 / 4.4.2.7(a)
	(NOTE: The above tests shall be performed in the order indicated. The two units submitted to environmental testing shall not be returned to the deliverable lot.)			
	Packing and Marking for Box, Exterior (Dwg. 9321931 before Sealing)			
	Examination for defects	2		3.2 / 4.4.2.8
	Packing and Marking for Box, Exterior (Dwg. 9321931 after Sealing)			
	Examination for defects	2		3.2 / 4.4.2.9
	Packing and Marking for Drum, Metal (Dwg. 9313708)			
	Examination for defects	2		3.2 / 4.4.2.10

NOTES:
a. Omit Major 101 for First Article Only.
b. Test shall be performed in sequence noted.

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examination. (See MIL-A-48078). Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Box	1 OF 1	9321320
			NEXT HIGHER ASSEMBLY: 9321321

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length incorrect		0.40%	3.2	Gage
102	Width incorrect		0.40%	3.2	Gage
103	Height incorrect		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

NRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Counter Buffer Circuit Assembly				9313670
					NEXT HIGHER ASSEMBLY 9321318
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or incorrectly assembled		0.40%	3.2	Visual/Manual
102	Soldering improper		100%	3.5	Visual/4.4.3.7
Minor					
201	Conformal coating missing or incorrect		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Panel, Front				9310960
					NEXT HIGHER ASSEMBLY 9310969
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length, width or thickness, incorrect		0.40%	3.2	Gage
102	Hole size, incorrect		0.40%	3.2	Gage
103	Hole location, incorrect		0.40%	3.2	Gage
Minor					
201	Protective finish incorrect		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Panel, Rear				9310961
					NEXT HIGHER ASSEMBLY
					9310968
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length of width, incorrect		0.40%	3.2	Gage
Minor					
201	Protective finish		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5	Panel, Edge Lighting	1 OF 1	9272532
			NEXT HIGHER ASSEMBLY 9272533

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length, width or thickness, incorrect		0.40%	3.2	Gage
102	Hole size, incorrect		0.40%	3.2	Gage
103	Hole location, incorrect		0.40%	3.2	Gage
104	Lettering incorrect		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Front and Rear Panel Assembly				9321318
					NEXT HIGHER ASSEMBLY
					9272533
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing damaged or incorrectly assembled		0.40%	3.2	Visual/Manual
102	Insulation sleeving missing or improperly installed		0.40%	3.2	Visual
103	Wire lacing missing or inadequate		0.40%	3.2	Visual
104	Soldering improper		100%	3.6	Visual/4.4.3.7
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.7	Dispenser Control Panel Assembly				9272533
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	Short circuit test on S2 switch		100%	3.4	4.5.1
Major					
101	Burn-in		100%	3.3	4.5.7
102	Functioning Test		100%	3.5	4.5.1
103	Any component missing, damaged or improperly installed		0.40%	3.2	Visual/Manual
104	Connector keyway orientation improper		0.40%	3.2	Visual
105	Identification plate missing or improperly annotated		0.40%	3.2	Visual
106	Counter knob clearance improper		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Packing and Marking for Box, Exterior (Before Sealing)	1 OF 1	9321931
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Control panel missing or damaged		0.40%	3.2	Visual
102	Packing missing, or inadequate		0.40%	3.2	Visual
103	Box, filler, or control panel obviously damp or wet		0.40%	3.2	Visual
104	Supports around control panel damaged or not properly located		0.40%	3.2	Visual
105	Waterproofness of barrier bag destroyed by puncture or separation of heat seal		0.40%	3.2	Visual
106	Excess air not exhausted from barrier bag prior to sealing		0.40%	3.2	Visual
Minor					
201	Heat seal of barrier bag located so that subsequent seals cannot be applied		0.65%	3.2	Visual
202	Marking missing, misleading, or unidentifiable		0.65%	3.2	Visual
203	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Packing and Marking for Box, Exterior (After Sealing)				9321931
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Box damaged to the extent that contents are exposed or liable to become exposed		0.40%	3.2	Visual
102	Boxes improperly sealed		0.40%	3.2	Visual
Minor					
201	Contents loose		0.65%	3.2	Visual
202	Marking missing, misleading, or unidentifiable		0.65%	3.2	Visual
203	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48890B(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.10	Packing and Marking for Drum, Metal Shipping for M130 Aircraft General Purpose Dispenser	1 OF 1	9313708
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Cushions missing or not secured		0.40%	3.2	Visual
102	Contents not thoroughly dry		0.40%	3.2	Visual
103	Any component missing or damaged		0.40%	3.2	Visual
104	Leak test		100%	3.2	4.4.3.8
Minor					
201	Markings missing, misleading or unidentifiable		0.65%	3.2	Visual
202	Fillers insufficient, loose contents		0.65%	3.2	Visual
203	Poor workmanship		1.00%	3.8	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Functioning. Each dispenser control panel assembly, after compliance with 4.5.7, shall be subjected to this test. The test shall be peformed as specified in 4.5.1 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.3, it shall be classified defective and removed from the lot.

4.4.3.2 Low temperature. Only dispenser control panel assemblies submitted for first article testing shall be subjected to functioning at low temperature. The test shall be performed as specified in 4.5.2 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.4, the first article sample shall be rejected.

4.4.3.3 High temperature. Only dispenser control panel assemblies submitted for first article testing shall be subjected to functioning at high temperature. The test shall be performed as specified in 4.5.3 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.5, the first article sample shall be rejected.

4.4.3.4 Transportation vibration. Each dispenser control panel assembly submitted for first article testing shall be subjected to this test. The test shall be performed as specified in 4.5.4 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.2, the first article sample shall be rejected.

4.4.3.5 Helicopter vibration. Each dispenser control panel assembly submitted for first article testing shall be subjected to this test. The test shall be performed as specified in 4.5.5 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.1, the first article sample shall be rejected.

4.4.3.6 Shock. Each dispenser control panel assembly submitted for first article testing shall be subjected to this test. The test shall be peformed as specified in 4.5.6 using equipment in accordance with 4.4.4. If any unit fails to comply with the requirements of 3.4.3, the first article sample shall be rejected.

4.4.3.7 Soldering. Each dispenser control panel assembly shall be inspected for soldering in accordance with 3.6. If any wiring or printed circuit card assembly fails to comply with the requirements of 3.5, the unit shall be classified defective and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4.4.3.8 Air leakage test (See Dwg. 8806652) - Major Defect. This test shall be performed 100% as specified in 4.5.8 using equipment in accordance with 4.4.4. Any drum which fails the test shall be class defective and removed from the lot.

4.4.4 Inspection equipment. The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column of the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and Section 6.3 herein.

4.5 Methods of inspection

4.5.1 Functioning. Each Dispenser Control Panel shall be subject to testing utilizing the functioning test system and procedures described in Dwg. 9280371. The dispenser excluding those conditioned at high or low temperature, shall be conditioned for four (4) hours minimum at 25 ± 5°C (ambient). Observation shall be made for compliance with the applicable requirements.

4.5.2 Low temperature. After conditioning at -54 ± 2°C according to MIL-STD-810C, Test Method 502.1, the control panel shall be subjected to the functioning test of 4.5.1 at low temperature. Observation shall be made for compliance with the applicable requirements. (Non-Destructive Test)

4.5.3 High temperature. After conditioning at 71 ± 2°C according to MIL-STD-810C, Test Method 501.1, the control panel shall be subjected to the functioning test of 4.5.1 at high temperature. Observation shall be made for compliance with the applicable requirements. (Non-Destructive Test)

4.5.4 Transportation vibration. This test shall be performed as specified in MIL-STD-810C, Method 514.2, Procedure X using curve AW of Figure 514.2-7 (change curve to 0.8" displacement (double amplitude) between 5&6 Hz). Following this test, examine each dispenser control panel (DCP) assembly for evidence of damage and submit each item to the functioning test of 4.5.1 at ambient temperature. Observation shall be made for compliance with the applicable requirements. (Non-Destructive Test)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4.5.5 Helicopter vibration. This test shall be performed as specified in MIL-STD-810C, Method 514.2, Procedure I, Part 2. One DCP should be tested to curve C of Figure 514.2-2 and the other DCP should be tested to curve M of Figure 514.2-3. Following this test, examine each dispenser control panel assembly for evidence of damage and submit each item to the functioning test 4.5.1 at ambient temperature. Observation shall be made for compliance with the applicable requirements. (Non-Destructive Test)

4.5.6 Shock. This test shall be performed as specified in MIL-STD-810C, Test Method 516.2, Procedure I, using peak value (a) and nominal duration (c) in figure 516.2-1. Following this test, examine each dispenser control panel assembly for evidence of damage and submit each item to the functioning test of 4.5.1 at ambient temperature. Observation shall be made for compliance with the applicable requirements. (Non-Destructive Test)

4.5.7 Burn-in. Each Dispenser Control Panel shall be subjected to testing utilizing the functioning test system and procedures described in Dwg. 9280366. Observation shall be made for compliance with the applicable requirements. (Non-Destructive Test)

4.5.8 Air leakage test. The drums shall be tested using Procedure on Drawing 8806652. Observation shall be made for compliance with the applicable requirements.

5. PACKAGING

5.1 Preservation and packaging.

5.1.1 Level A. When shipped as a repair part, the control panel assembly shall be preserved and packaged in accordance with drawing 9321931, or when shipped as part of the M130 Dispenser System in accordance with Dwg. 9313708.

5.2 Packing.

5.2.1 Level A. When shipped as a repair part, the control panel assembly shall be packed in accordance with drawing 9321931, or when shipped as part of the M130 Dispenser System in accordance with Dwg. 9313708.

5.3 Marking.

5.3.1 Level A. When shipped as a repair part, the control panel assembly shall be marked in accordance with drawing 9321931, or when shipped as part of the M130 Dispenser System in accordance with Dwg. 9313708.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

5.4 Unitization.

5.4.1 Level A. Only when shipped as a part of the M130 Dispenser System shall the control panel assembly in the drum be unitized in accordance with Dwg. 19-48-4138/109-20 PA1000 (DARCOM Ammo Center).

6. NOTES

6.1 Intended use. The control panel is intended for use with the M130 Aircraft General Purpose Dispenser System.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Provisions of MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078) Submit equipment designs as required to Commander, U.S Army Armament Research and Development Center, AMSMC-QAT-I(D), Dover, New Jersey 07801.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal, or ARRADCOM drawings. Technical data originally prepared by these activities is now under the cognizance of ARDC.

6.5 Distribution of ammunition data cards. Distribution of data cards shall include the following: Commander, U.S Army Armament Research and Development Center, Attn: AMSMC-QAT-M(D), Dover, New Jersey 07801.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1345-A319)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Munitions &
Chemical Command
ATTN: AMSMC-QA
Dover, NJ 07801-5001

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-48890B (AR)	Control Panel Assembly For M130 Dispenser System

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.