MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
NONENVIRONMENTAL, STRAIGHT, SHIELD TERMINATION, CATEGORY 3A
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703
SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

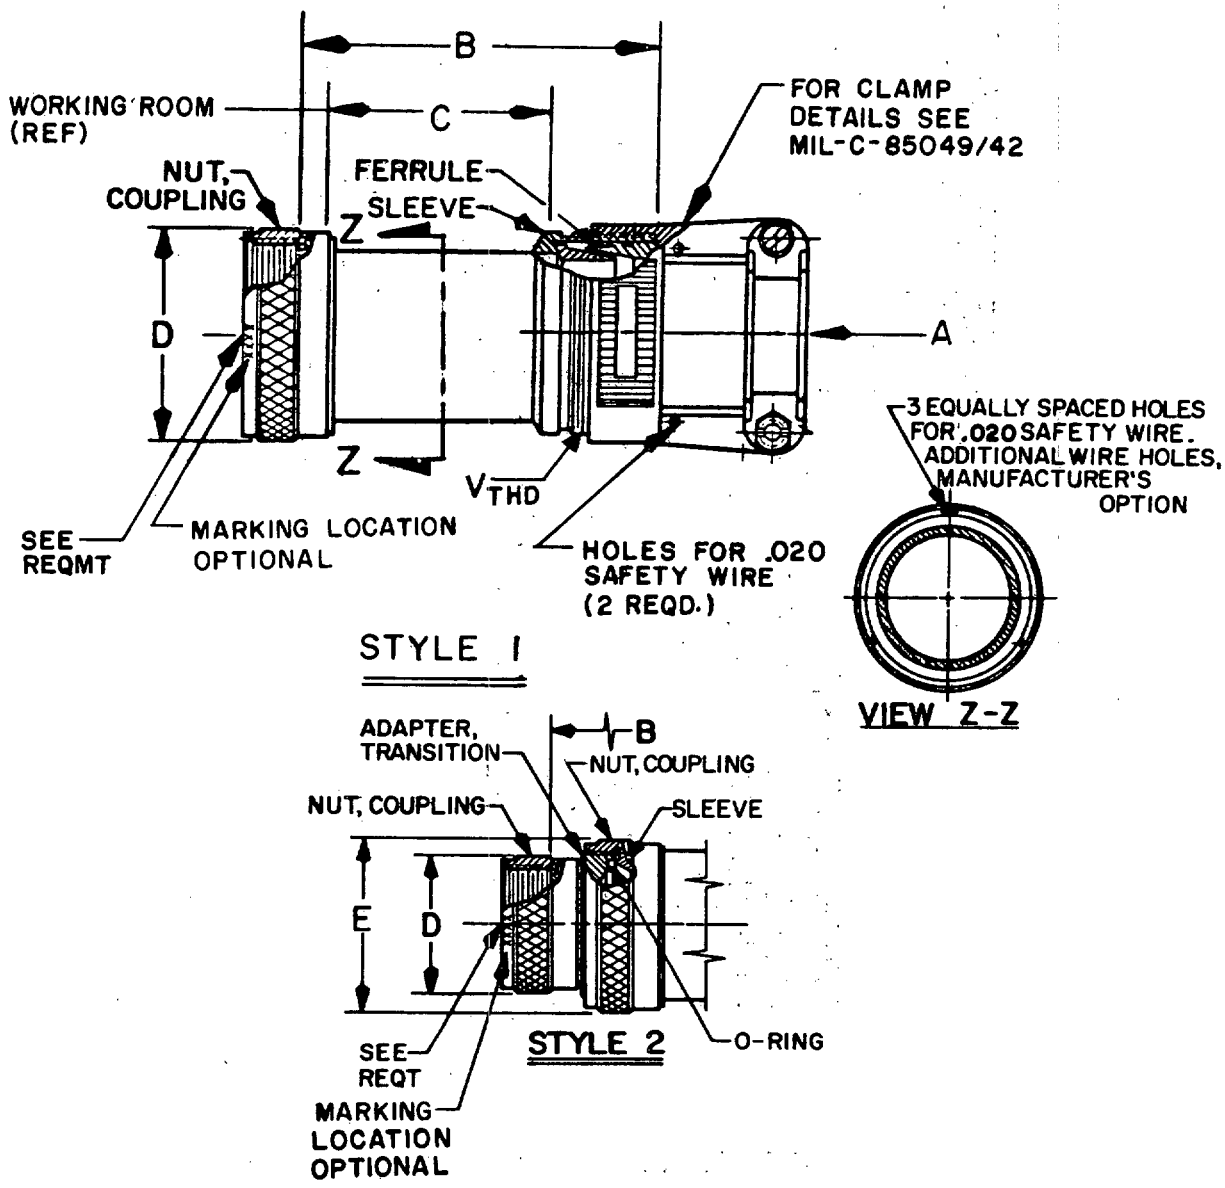



FIGURE 1. Configurations and dimensions.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | CLAMP SIZE | A CABLE RANGE MIN | A CABLE RANGE MAX | STYLE | B ±.062 | D DIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| 01 | 3 | | | | 4 | .125 | .250 | 1 | 2.00 | .669 |
| 02 | | | | | | | | | 3.00 | |
| 03 | | | | | 6 | .250 | .437 | 2 | 2.75 | .669 |
| 04 | | | | | | | | | 3.75 | |
| 05 | | 8 | 8S | 8 | 4 | .125 | .250 | 1 | 2.00 | .617 |
| 06 | | | | | | | | | 3.00 | |
| 07 | | | | | 6 | .250 | .437 | 2 | 2.75 | .617 |
| 08 | | | | | | | | | 3.75 | |
| 09 | | 10 | 10S,10SL | 10 | 4 | .125 | .312 | 1 | 2.00 | .734 |
| 10 | | | | | | | | | 3.00 | |
| 11 | | | | | 6 | .250 | .437 | 2 | 2.75 | .734 |
| 12 | | | | | | | | | 3.75 | |
| 13 | 7 | 12 | 12,12S | 12 | 6 | .250 | .437 | 1 | 2.00 | .858 |
| 14 | | | | | | | | | 3.00 | |
| 15 | | | | | 10 | .350 | .625 | 2 | 2.75 | .858 |
| 16 | | | | | | | | | 3.75 | |
| 17 | 12 | 14 | 14,14S | 14 | 10 | .350 | .575 | 1 | 2.00 | .984 |
| 18 | | | | | | | | | 3.00 | |
| 19 | | | | | 12 | .500 | .750 | 2 | 2.75 | .984 |
| 20 | | | | | | | | | 3.75 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 01 | 1.06 | .625-24 UNEF | — |
| 02 | 2.06 | | |
| 03 | 1.81 | .750-20 UNEF | .858 |
| 04 | 2.81 | | |
| 05 | 1.06 | .625-24 UNEF | — |
| 06 | 2.06 | | |
| 07 | 1.81 | .750-20 UNEF | .858 |
| 08 | 2.81 | | |
| 09 | 1.06 | .625-24 UNEF | — |
| 10 | 2.06 | | |
| 11 | 1.81 | .750-20 UNEF | .858 |
| 12 | 2.81 | | |
| 13 | 1.06 | .750-20 UNEF | — |
| 14 | 2.06 | | |
| 15 | 1.67 | 1.000-20 UNEF | 1.112 |
| 16 | 2.67 | | |
| 17 | 0.92 | 1.000-20 UNEF | — |
| 18 | 1.92 | | |
| 19 | 1.67 | 1.187-18 UNEF | 1.218 |
| 20 | 2.67 | | |

FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | CLAMP SIZE | A CABLE RANGE MIN | A CABLE RANGE MAX | STYLE | B ±.062 | D DIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| 21 | 19 | 16 | 16,16S | 16 | 12 | .500 | .700 | 1 | 2.00 | 1.112 |
| 22 | | | | | | | | | 3.00 | |
| 23 | | | | | 16 | .625 | .937 | 2 | 2.75 | 1.112 |
| 24 | | | | | | | | | 3.75 | |
| 25 | 27 | 18 | 18 | 18 | 10 | .350 | .625 | 1 | 2.00 | 1.218 |
| 26 | | | | | | | | | 3.00 | |
| 27 | | | | | 12 | .500 | .750 | 1 | 2.00 | 1.218 |
| 28 | | | | | | | | | 3.00 | |
| 29 | | | | | 16 | .625 | .937 | 2 | 2.75 | 1.218 |
| 30 | | | | | | | | | 3.75 | |
| 31 | 37 | 20 | 20 | 20 | 10 | .350 | .625 | 1 | 3.00 | 1.345 |
| 32 | | | | | | | | | 4.00 | |
| 33 | | | | | 12 | .500 | .750 | 1 | 3.00 | 1.345 |
| 34 | | | | | | | | | 4.00 | |
| 35 | | | | | 16 | .625 | .937 | 2 | 3.75 | 1.345 |
| 36 | | | | | | | | | 4.75 | |
| 37 | | | | | 20 | .875 | 1.250 | 2 | 3.75 | 1.345 |
| 38 | | | | | | | | | 4.75 | |
| 39 | | 22 | 22 | 22 | 10 | .350 | .625 | 1 | 3.00 | 1.468 |
| 40 | | | | | | | | | 4.00 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 21 | 0.92 | 1.187-18 UNEF | – |
| 22 | 1.92 | | |
| 23 | 1.67 | 1.437-18 UNEF | 1.468 |
| 24 | 2.67 | | |
| 25 | 0.92 | 1.000-20 UNEF | – |
| 26 | 1.92 | | |
| 27 | 0.92 | 1.187-18 UNEF | – |
| 28 | 1.92 | | |
| 29 | 1.67 | 1.437-18 UNEF | 1.468 |
| 30 | 2.67 | | |
| 31 | 1.92 | 1.000-20 UNEF | – |
| 32 | 2.92 | | |
| 33 | 1.92 | 1.187-18 UNEF | – |
| 34 | 2.92 | | |
| 35 | 2.67 | 1.437-18 UNEF | 1.468 |
| 36 | 3.67 | | |
| 37 | 2.67 | 1.750-18 UNS | 1.969 |
| 38 | 3.67 | | |
| 39 | 1.92 | 1.000-20 UNEF | – |
| 40 | 2.92 | | |

FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | CLAMP SIZE | A CABLE RANGE MIN | A CABLE RANGE MAX | STYLE | B ±.062 | D DIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| 41 | | 22 | 22 | 22 | 12 | .500 | .750 | 1 | 3.00 | 1.468 |
| 42 | | | | | | | | | 4.00 | |
| 43 | | | | | 16 | .625 | .937 | 1 | 3.00 | 1.468 |
| 44 | | | | | | | | | 4.00 | |
| 45 | | | | | 20 | .875 | 1.250 | 2 | 3.75 | 1.468 |
| 46 | | | | | | | | | 4.75 | |
| 47 | | 24 | 24 | 24 | 12 | .500 | .750 | 1 | 3.00 | 1.593 |
| 48 | | | | | | | | | 4.00 | |
| 49 | | | | | 16 | .625 | .812 | 1 | 3.00 | 1.593 |
| 50 | | | | | | | | | 4.00 | |
| 51 | | | | | 16 | .625 | .937 | 1 | 3.00 | 1.593 |
| 52 | | | | | | | | | 4.00 | |
| 53 | | | | | 20 | .875 | 1.250 | 2 | 3.75 | 1.593 |
| 54 | | | | | | | | | 4.75 | |
| 55 | | 28 | 28 | 28 | 12 | .500 | .750 | 1 | 3.00 | 1.969 |
| 56 | | | | | | | | | 4.00 | |
| 57 | | | | | 16 | .625 | .937 | 1 | 3.00 | 1.969 |
| 58 | | | | | | | | | 4.00 | |
| 59 | | | | | 20 | .875 | 1.250 | 1 | 3.00 | 1.969 |
| 60 | | | | | | | | | 4.00 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 41 | 1.92 | 1.187-18 UNEF | – |
| 42 | 2.92 | | |
| 43 | 1.92 | 1.437-18 UNEF | – |
| 44 | 2.92 | | |
| 45 | 2.67 | 1.750-18 UNS | 1.969 |
| 46 | 3.67 | | |
| 47 | 1.92 | 1.187-18 UNEF | – |
| 48 | 2.92 | | |
| 49 | 1.92 | 1.437-18 UNEF | – |
| 50 | 2.92 | | |
| 51 | 1.92 | 1.437-18 UNEF | – |
| 52 | 2.92 | | |
| 53 | 2.67 | 1.750-18 UNS | 1.969 |
| 54 | 3.67 | | |
| 55 | 1.92 | 1.187-18 UNEF | – |
| 56 | 2.92 | | |
| 57 | 1.92 | 1.437-18 UNEF | – |
| 58 | 2.92 | | |
| 59 | 1.92 | 1.750-18 UNS | – |
| 60 | 2.92 | | |

FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | CLAMP SIZE | A CABLE RANGE MIN | A CABLE RANGE MAX | STYLE | B ±.062 | D DIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| 61 | | | 28 | | 24 | 1.000 | 1.375 | 1 | 3.00 | 1.969 |
| 62 | | | | | | | | | 4.00 | |
| 63 | | | 32 | | 16 | .625 | .937 | 1 | 3.00 | 2.219 |
| 64 | | | | | | | | | 4.00 | |
| 65 | | | | | 20 | .875 | 1.250 | 1 | 3.00 | 2.219 |
| 66 | | | | | | | | | 4.00 | |
| 67 | | | | | 24 | 1.000 | 1.375 | 1 | 3.00 | 2.219 |
| 68 | | | | | | | | | 4.00 | |
| 69 | | | | | 28 | 1.250 | 1.625 | 1 | 3.00 | 2.219 |
| 70 | | | | | | | | | 4.00 | |
| 71 | | | 36 | | 20 | .875 | 1.250 | 1 | 4.00 | 2.469 |
| 72 | | | | | | | | | 5.00 | |
| 73 | | | | | 24 | 1.000 | 1.375 | 1 | 4.00 | 2.469 |
| 74 | | | | | | | | | 5.00 | |
| 75 | | | | | 28 | 1.250 | 1.625 | 1 | 4.00 | 2.469 |
| 76 | | | | | | | | | 5.00 | |
| 77 | | | | | 32 | 1.437 | 1.875 | 2 | 4.86 | 2.469 |
| 78 | | | | | | | | | 5.88 | |
| 79 | | | 40 | | 20 | .875 | 1.250 | 1 | 4.00 | 2.719 |
| 80 | | | | | | | | | 5.00 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 61 | 1.92 | 2.000-18 UNS | - |
| 62 | 2.92 | | |
| 63 | 1.92 | 1.437-18 UNEF | - |
| 64 | 2.92 | | |
| 65 | 1.92 | 1.750-18 UNS | - |
| 66 | 2.92 | | |
| 67 | 1.92 | 2.000-18 UNS | - |
| 68 | 2.92 | | |
| 69 | 1.92 | 2.250-16 UN | - |
| 70 | 2.92 | | |
| 71 | 2.92 | 1.750-18 UNS | - |
| 72 | 3.92 | | |
| 73 | 2.92 | 2.000-18 UNS | - |
| 74 | 3.92 | | |
| 75 | 2.92 | 2.250-16 UN | - |
| 76 | 3.92 | | |
| 77 | 3.80 | 2.500-16 UN | 2.719 |
| 78 | 4.80 | | |
| 79 | 2.92 | 1.750-18 UNS | - |
| 80 | 3.92 | | |

FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | CLAMP SIZE | A CABLE RANGE MIN | A CABLE RANGE MAX | STYLE | B ±.062 | D DIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| 81 | | | 40 | | 24 | 1.000 | 1.375 | 1 | 4.00 | 2.719 |
| 82 | | | | | | | | | 5.00 | |
| 83 | | | | | 28 | 1.250 | 1.625 | 1 | 4.00 | 2.719 |
| 84 | | | | | | | | | 5.00 | |
| 85 | | | | | 32 | 1.437 | 1.875 | 1 | 4.00 | 2.719 |
| 86 | | | | | | | | | 5.00 | |
| 87 | | | 44 | | 20 | .875 | 1.250 | 1 | 4.00 | 2.969 |
| 88 | | | | | | | | | 5.00 | |
| 89 | | | | | 24 | 1.000 | 1.375 | 1 | 4.00 | 2.969 |
| 90 | | | | | | | | | 5.00 | |
| 91 | | | | | 28 | 1.250 | 1.625 | 1 | 4.00 | 2.969 |
| 92 | | | | | | | | | 5.00 | |
| 93 | | | | | 32 | 1.437 | 1.875 | 1 | 4.00 | 2.969 |
| 94 | | | | | | | | | 5.00 | |
| 95 | | | 48 | | 20 | .875 | 1.250 | 1 | 4.00 | 3.219 |
| 96 | | | | | | | | | 5.00 | |
| 97 | | | | | 24 | 1.000 | 1.375 | 1 | 4.00 | 3.219 |
| 98 | | | | | | | | | 5.00 | |
| 99 | | | | | 28 | 1.250 | 1.625 | 1 | 4.00 | 3.219 |
| 100 | | | | | | | | | 5.00 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 81 | 2.92 | 2.000-18 UNS | - |
| 82 | 3.92 | | |
| 83 | 2.92 | 2.250-16 UN | - |
| 84 | 3.92 | | |
| 85 | 2.92 | 2.500-16 UN | - |
| 86 | 3.92 | | |
| 87 | 2.92 | 1.750-18 UNS | - |
| 88 | 3.92 | | |
| 89 | 2.92 | 2.000-18 UNS | - |
| 90 | 3.92 | | |
| 91 | 2.92 | 2.250-16 UN | - |
| 92 | 3.92 | | |
| 93 | 2.92 | 2.500-16 UN | - |
| 94 | 3.92 | | |
| 95 | 2.92 | 1.750-18 UNS | - |
| 96 | 3.92 | | |
| 97 | 2.92 | 2.000-18 UNS | - |
| 98 | 3.92 | | |
| 99 | 2.92 | 2.250-16 UN | - |
| 100 | 3.92 | | |

FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | CLAMP SIZE | A CABLE RANGE MIN | A CABLE RANGE MAX | STYLE | B ±.062 | D DIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| 101 | | | 48 | | 32 | 1.437 | 1.875 | 1 | 4.00 | 3.219 |
| 102 | | | | | | | | | 5.00 | |
| 103 | | | | | 12 | .500 | .750 | 1 | 3.00 | 1.653 |
| 104 | | | | | | | | | 4.00 | |
| 105 | | | | | 16 | .625 | .937 | 1 | 3.00 | 1.653 |
| 106 | 61 | | | | | | | | 4.00 | |
| 107 | | | | | 20 | .875 | 1.250 | 2 | 3.75 | 1.653 |
| 108 | | | | | | | | | 4.75 | |
| 109 | | | | | 24 | 1.000 | 1.375 | 2 | 3.75 | 1.653 |
| 110 | | | | | | | | | 4.75 | |
| 111 | 7 | 12 | 12,12S | 12 | 10 | .350 | .500 | 1 | 2.00 | .858 |
| 112 | 19 | 16 | 16,16S | 16 | 6 | .250 | .437 | 1 | 2.00 | 1.112 |
| 113 | | | | | | | | | 3.00 | |
| 114 | 7 | 12 | 12,12S | 12 | 4 | .125 | .312 | 1 | 2.00 | .858 |
| 115 | | | | | | | | | 3.00 | |
| 116 | 12 | 14 | 14,14S | 14 | 6 | .250 | .437 | 1 | 2.00 | .984 |
| 117 | | | | | | | | | 3.00 | |
| 118 | 19 | 16 | 16,16S | 16 | 10 | .350 | .625 | 1 | 2.00 | 1.112 |
| 119 | | | | | | | | | 3.00 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 101 | 2.92 | 2.500-16 UN | – |
| 102 | 3.92 | | |
| 103 | 1.92 | 1.187-18 UNEF | – |
| 104 | 2.92 | | |
| 105 | 1.92 | 1.437-18 UNEF | – |
| 106 | 2.92 | | |
| 107 | 2.67 | 1.750-18 UNS | 1.969 |
| 108 | 3.67 | | |
| 109 | 2.67 | 2.000-18 UNS | 1.969 |
| 110 | 3.67 | | |
| 111 | 1.00 | 1.000-20 UNEF | – |
| 112 | 1.00 | .750-20 UNEF | – |
| 113 | 2.00 | | |
| 114 | 1.00 | .625-24 UNEF | – |
| 115 | 2.00 | | |
| 116 | 1.00 | .750-20 UNEF | – |
| 117 | 2.00 | | |
| 118 | 0.92 | 1.000-20 UNEF | – |
| 119 | 1.92 | | |

FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR | | | | CLAMP SIZE | A CABLE RANGE | | STYLE | B | D DIA |
|---|---|---|---|---|---|---|---|---|---|---|
| | MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | | MIN | MAX | | ±.062 | MAX |
| 120 | 27 | 18 | 18 | 18 | 4 | .125 | .312 | 1 | 2.00 | 1.218 |
| 121 | | | | | | | | | 3.00 | |
| 122 | | | | | 6 | .250 | .437 | 1 | 2.00 | 1.218 |
| 123 | | | | | | | | | 3.00 | |
| 124 | 37 | 20 | 20 | 20 | 6 | .250 | .437 | 1 | 3.00 | 1.345 |
| 125 | | | | | | | | | 4.00 | |
| 126 | | 22 | 22 | 22 | 4 | .125 | .312 | 1 | 3.00 | 1.468 |
| 127 | | | | | | | | | 4.00 | |
| 128 | | | | | 6 | .250 | .437 | 1 | 3.00 | 1.468 |
| 129 | | | | | | | | | 4.00 | |
| 130 | | 24 | 24 | 24 | 10 | .350 | .625 | 1 | 3.00 | 1.593 |
| 131 | | | | | | | | | 4.00 | |
| 132 | | | 36 | | 12 | .500 | .750 | 1 | 4.00 | 2.469 |
| 133 | | | | | | | | | 5.00 | |
| 134 | | | 40 | | 12 | .500 | .750 | 1 | 4.00 | 2.719 |
| 135 | | | | | | | | | 5.00 | |
| 136 | | 10 | 10S,10SL | 10 | 6 | .250 | .375 | 1 | 2.00 | .734 |
| 137 | | | | | | | | | 3.00 | |
| 138 | 7 | 12 | 12;12S | 12 | 10 | .350 | .500 | 1 | 2.00 | .858 |
| 139 | | | | | | | | | 3.00 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 120 | 0.92 | .625-24 UNEF | - |
| 121 | 1.92 | | |
| 122 | 0.92 | .750-20 UNEF | - |
| 123 | 1.92 | | |
| 124 | 1.92 | .750-20 UNEF | - |
| 125 | 2.92 | | |
| 126 | 1.92 | .625-24 UNEF | - |
| 127 | 2.92 | | |
| 128 | 1.92 | .750-20 UNEF | - |
| 129 | 2.92 | | |
| 130 | 1.92 | 1.000-20 UNEF | - |
| 131 | 2.92 | | |
| 132 | 2.92 | 1.187-18 UNEF | - |
| 133 | 3.92 | | |
| 134 | 2.92 | 1.187-18 UNEF | - |
| 135 | 3.92 | | |
| 136 | 1.06 | .750-20 UNEF | - |
| 137 | 2.06 | | |
| 138 | 1.06 | 1.000-20 UNEF | - |
| 139 | 2.06 | | |

FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

| DASH NO | FITS SHELL OF CONNECTOR MIL-C-81703 SER 3 | MIL-C-26482 SER 2 | MIL-C-5015 CRIMP | MIL-C-83723 SER III | CLAMP SIZE | A CABLE RANGE MIN | A CABLE RANGE MAX | STYLE | B ±.062 | D DIA MAX |
|---|---|---|---|---|---|---|---|---|---|---|
| 140 | 37 | 20 | 20 | 20 | 16 | .625 | .904 | 1 | 3.00 | 1.345 |
| 141 | | | | | | | | | 4.00 | |
| 142 | | 22 | 22 | 22 | 20 | .875 | 1.029 | 1 | 3.00 | 1.468 |
| 143 | | | | | | | | | 4.00 | |
| 144 | | 24 | 24 | 24 | 20 | .875 | 1.144 | 1 | 3.00 | 1.593 |
| 145 | | | | | | | | | 4.00 | |
| 146 | | | 36 | | 32 | 1.437 | 1.840 | 1 | 4.00 | 2.469 |
| 147 | | | | | | | | | 5.00 | |
| 148 | | | | | 16 | .625 | .937 | 1 | 4.00 | 2.469 |
| 149 | | | | | | | | | 5.00 | |
| 150 | 12 | 14 | 14,14S | 14 | 4 | .125 | .312 | 1 | 2.00 | .984 |
| 151 | | | | | | | | | 3.00 | |
| 152 | 19 | 16 | 16,16S | 16 | 4 | .125 | .312 | 1 | 2.00 | 1.112 |
| 153 | | | | | | | | | 3.00 | |
| 154 | | | 44 | | 16 | .625 | .937 | 1 | 4.00 | 2.969 |
| 155 | | | | | | | | | 5.00 | |
| 156 | | | 40 | | 16 | .625 | .937 | 1 | 4.00 | 2.719 |
| 157 | | | | | | | | | 5.00 | |

| DASH NO | C REF | V THREAD CLASS 2A | E DIA MAX |
|---|---|---|---|
| 140 | 1.92 | 1.437-18 UNEF | - |
| 141 | 2.92 | | |
| 142 | 1.92 | 1.750-18 UNEF | - |
| 143 | 2.92 | | |
| 144 | 1.92 | 1.750-18 UNEF | - |
| 145 | 2.92 | | |
| 146 | 2.92 | 2.500-16 UNEF | - |
| 147 | 3.92 | | |
| 148 | 2.92 | 1.437-18 UNEF | - |
| 149 | 3.92 | | |
| 150 | 0.92 | .625-24 UNEF | - |
| 151 | 1.92 | | |
| 152 | 0.92 | .625-24 UNEF | - |
| 153 | 1.92 | | |
| 154 | 2.92 | 1.437-18 UNEF | - |
| 155 | 3.92 | | |
| 156 | 2.92 | 1.437-18 UNEF | - |
| 157 | 3.92 | | |


| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|---|---|
| .020 | .51 | 1.281 | 32.54 | 1.593 | 40.46 | 2.093 | 53.16 | 4.00 | 101.6 |
| .062 | 1.57 | 1.312 | 33.32 | 1.625 | 41.28 | 2.343 | 59.51 | 4.75 | 120.6 |
| .937 | 23.80 | 1.406 | 35.71 | 1.750 | 44.45 | 2.750 | 69.85 | 4.88 | 124.0 |
| 1.125 | 28.58 | 1.531 | 38.89 | 1.900 | 48.26 | 3.000 | 76.20 | 5.00 | 127.0 |
| | | | | 2.00 | 50.8 | 3.75 | 95.2 | 5.88 | 149.4 |

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Style 2 applies when the cable diameter exceeds the "E" diameter of MS3155.


FIGURE 1. Configurations and dimensions - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

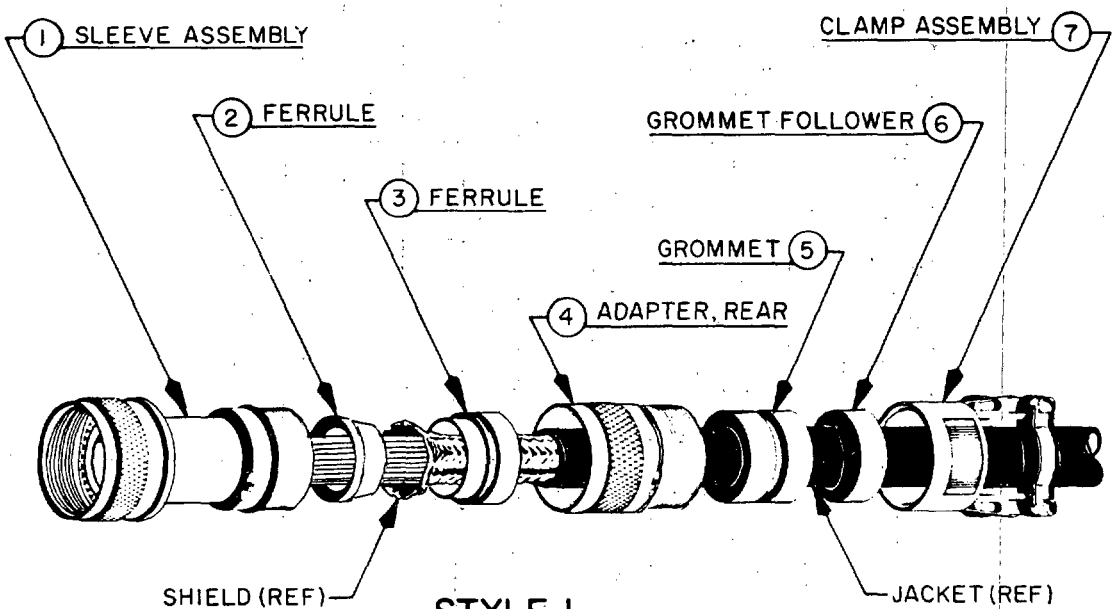


STYLE I
SHIELD, ENVIRONMENTAL

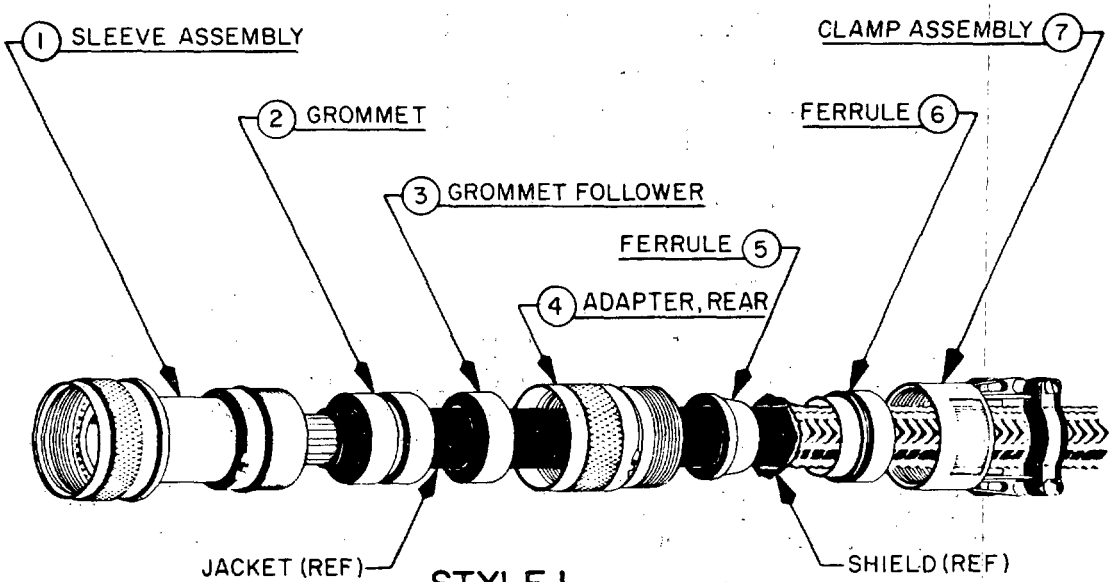



STYLE I
ARMOR, ENVIRONMENTAL


FIGURE 2. Assembly instructions




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

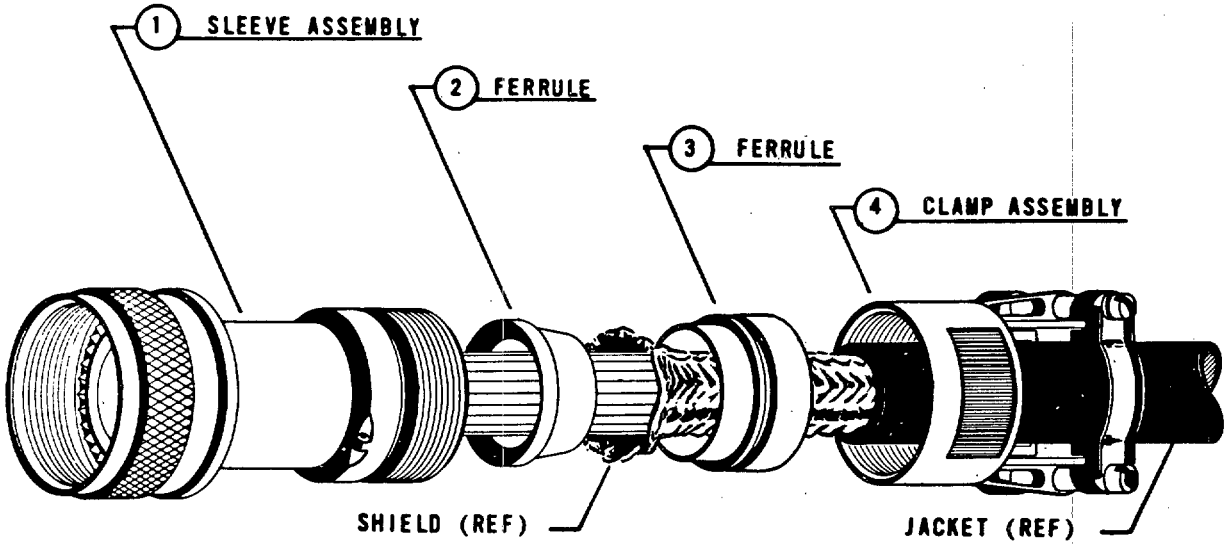


STYLE 1
SHIELD

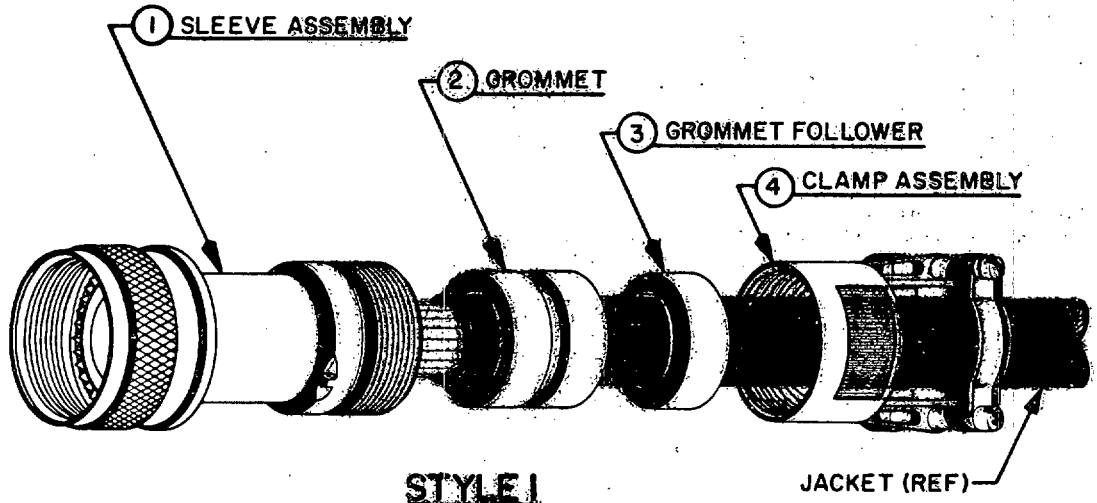


STYLE 1
ENVIRONMENTAL

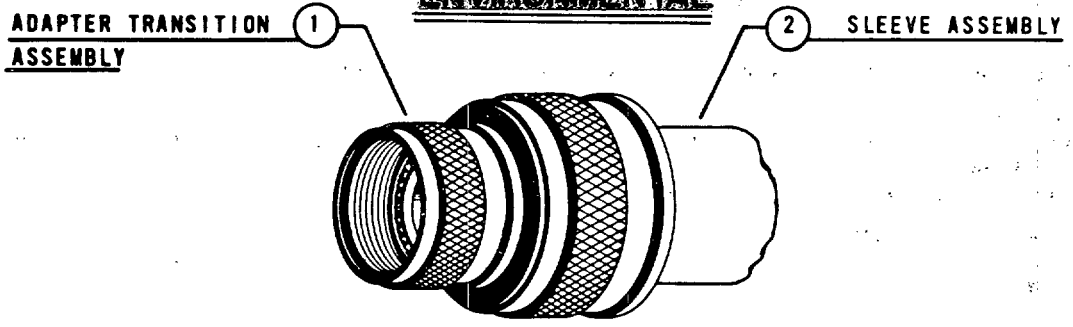


STYLE 2
(SEE NOTE 4)

FIGURE 2. Assembly instructions - continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

Figure 1 consists of an accessory nut and follower. The accessory nut shall be captivated to, and free to rotate on the follower.

Interface dimensions shall conform to MS3155.

Cable sealing range: See table I.

TABLE I. Cable sealing range.

| Dash number | Cable sealing range | | Test plug diameter (inches) | | Pull-out load (pounds) | Shell size range |
|---|---|---|---|---|---|---|
| | Minimum Dia (inches) | Maximum Dia (inches) | Min | Max | | |
| 02 | .125 | .250 | .109 | .125 | 25 | 1 |
| 06 | .125 | .250 | .109 | .125 | | |
| 10 | .125 | .312 | .109 | .125 | | |
| 14 | .250 | .437 | .234 | .250 | | |
| 18 | .350 | .575 | .334 | .350 | 50 | |
| 22 | .500 | .700 | .484 | .500 | | |
| 26 | .350 | .625 | .334 | .350 | | 2 |
| 32 | .350 | .625 | .334 | .350 | 75 | |
| 40 | .350 | .625 | .334 | .350 | | |
| 48 | .500 | .750 | .484 | .500 | | |
| 56 | .500 | .750 | .484 | .500 | | |
| 64 | .625 | .937 | .609 | .625 | 100 | 3 |
| 72 | .875 | 1.250 | .859 | .875 | | |
| 80 | .875 | 1.250 | .859 | .875 | | |
| 88 | .875 | 1.250 | .859 | .875 | | |
| 96 | .875 | 1.250 | .859 | .875 | | |

Material and finish:
Accessory components shall be as shown in table II.
Clamp assembly screws - 316 series stainless steel.

TABLE II. Material and finish.

| Component | Material | Finish |
|---|---|---|
| Body | Aluminum alloy in accordance with MIL-C-85049 | W<br>1/ N |
| Body | 316 Series Stainless steel | B, S |

1/ Not for Navy use.

Simplified assembly instructions shall be packaged with each accessory.

Applications:
a. These backshells are for shield termination applications only and are less the rear adapter and grommet.
b. For assembly instructions see figure 2.

Part number: See example below:


| | | | | | | |
|---|---|---|---|---|---|---|
| Military designator | M85049/ | 25 | - | 10 | | W |
| Specification sheet | | | | | | |
| Dash number | | | | | | |
| Finish (see table II) | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Qualification:
See MIL-C-85049, category 3A.

QPL evaluating activity: Naval Weapons Support Center, code 3064, Crane, IN 47522.
Supersession data:

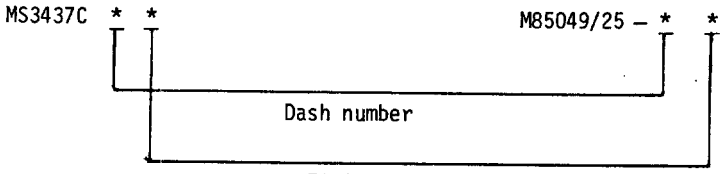


| Old | New |
|---|---|
| A | W |
| C | W |
| N | N |
| D | W |
| S | S |
| | B |

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-16)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-85049/25

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.