
This document is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

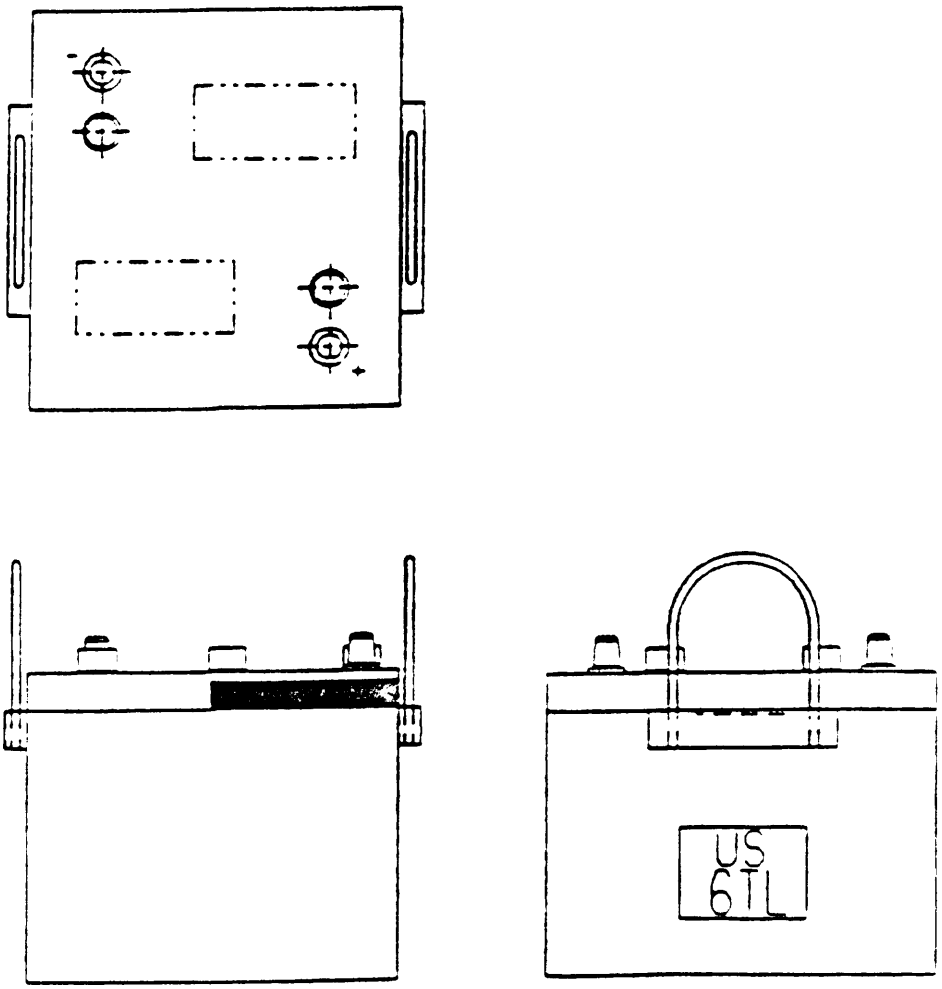

METRIC

NOTES:

1. FOR DETAILS OF CONSTRUCTION SEE SHEETS 2 THRU 7.
2. THE USE OF ASTERISKS (*) THROUGHOUT THE DOCUMENT INDICATES INTERNATIONAL AGREEMENT (SEE NOTE 7).


PREPARING ACTIVITY: AT CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 6140-A760	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL	SPECIFICATION SHEET NUMBER: MS52149G(AT) 8 September 1994 SUPERSEDING: MS52149F(AT) 27 MAY 1992 AMSC-NA FSC- 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62345

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

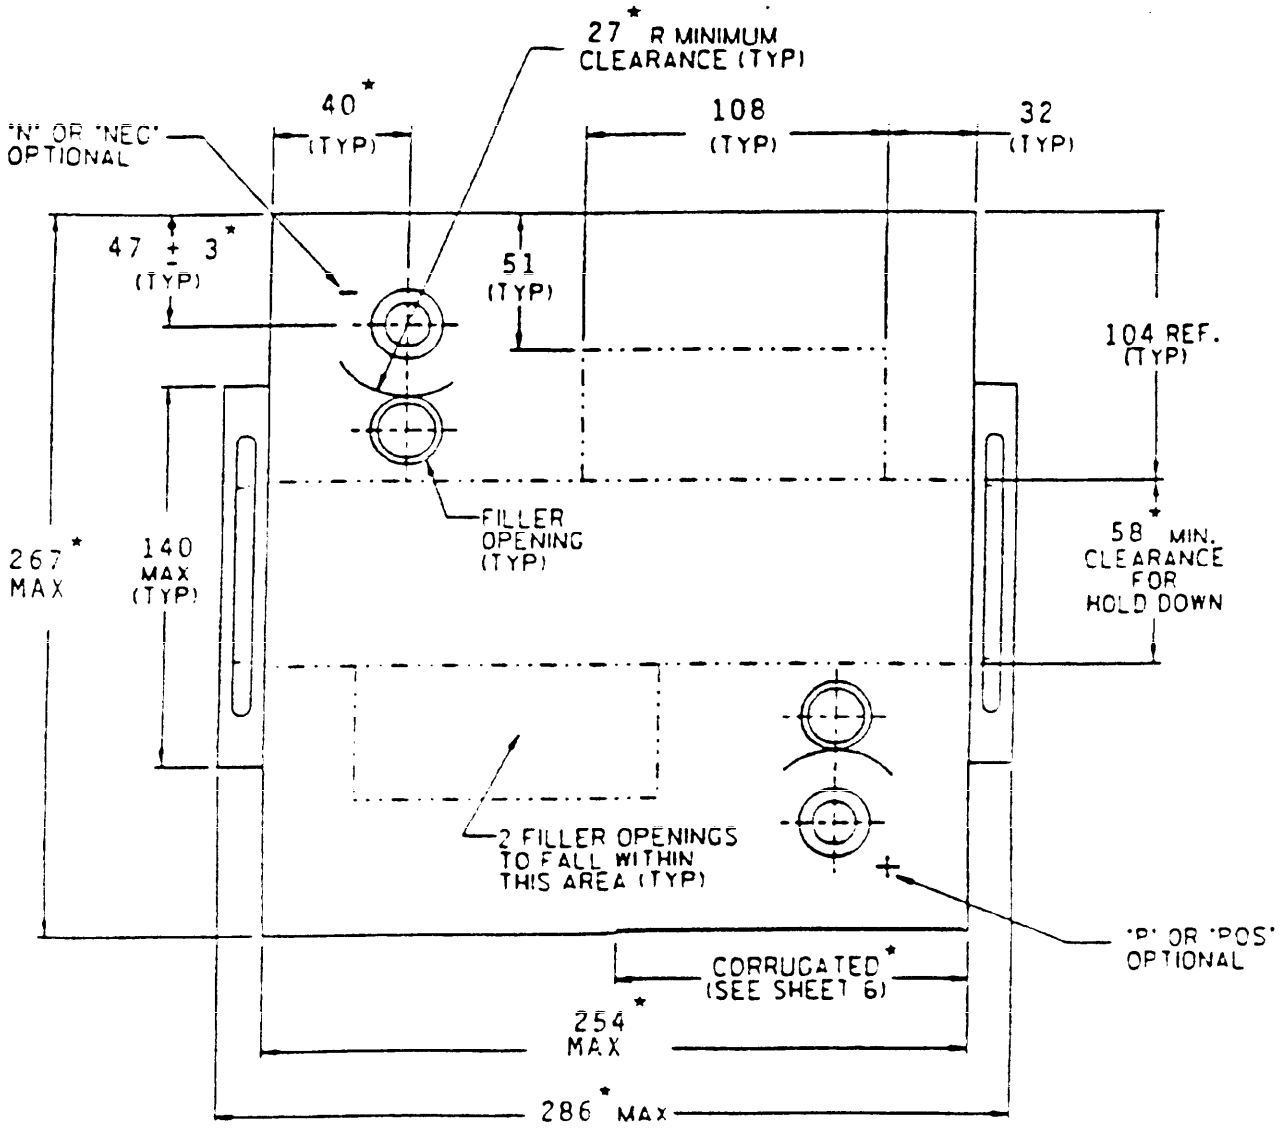


PREPARING ACTIVITY: AT CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 6140-A760	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE, LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL	SPECIFICATION SHEET NUMBER: MS52149G(AT) 8 September 1994 SUPERSEDING: MS52149F(AT) 27 MAY 1992 AMSC-NA FSC- 6140

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:21Z
Check the source to verify that this is the currentversion before use.

requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

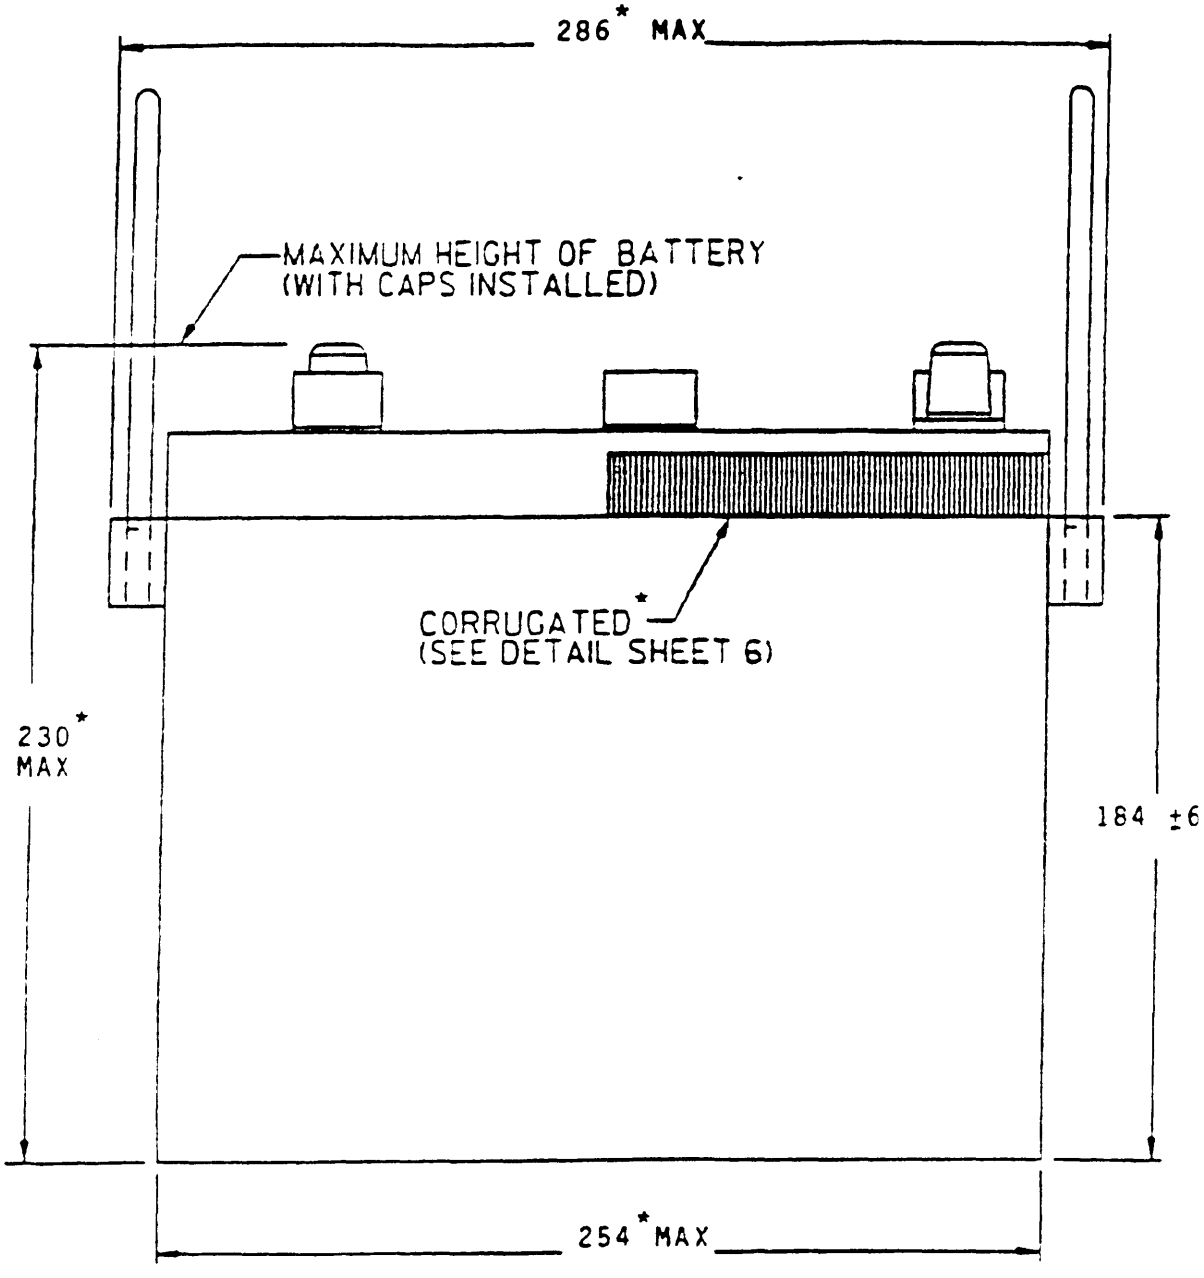

NOTE: OUTSIDE CORNERS SHOWN SQUARE TO INDICATE MAXIMUM DIMENSIONS. ACTUAL CONFIGURATION OPTIONAL. RIBBING AND DETAILING ON SIDES OF BATTERY ALSO OPTIONAL.


PREPARING ACTIVITY: AT CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 6140-A760	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE, LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL	SPECIFICATION SHEET NUMBER: MS52149G(AT) 8 September 1994 SUPERSEDING: MS52149F(AT) 27 MAY 1992 AMSC-NA FSC- 6140

Source: https://assist.dla.mil -- Downloaded: 20261O-23T18:21Z
Check the source to verify that this is the current version before use.

OMB No. 0704-0188

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

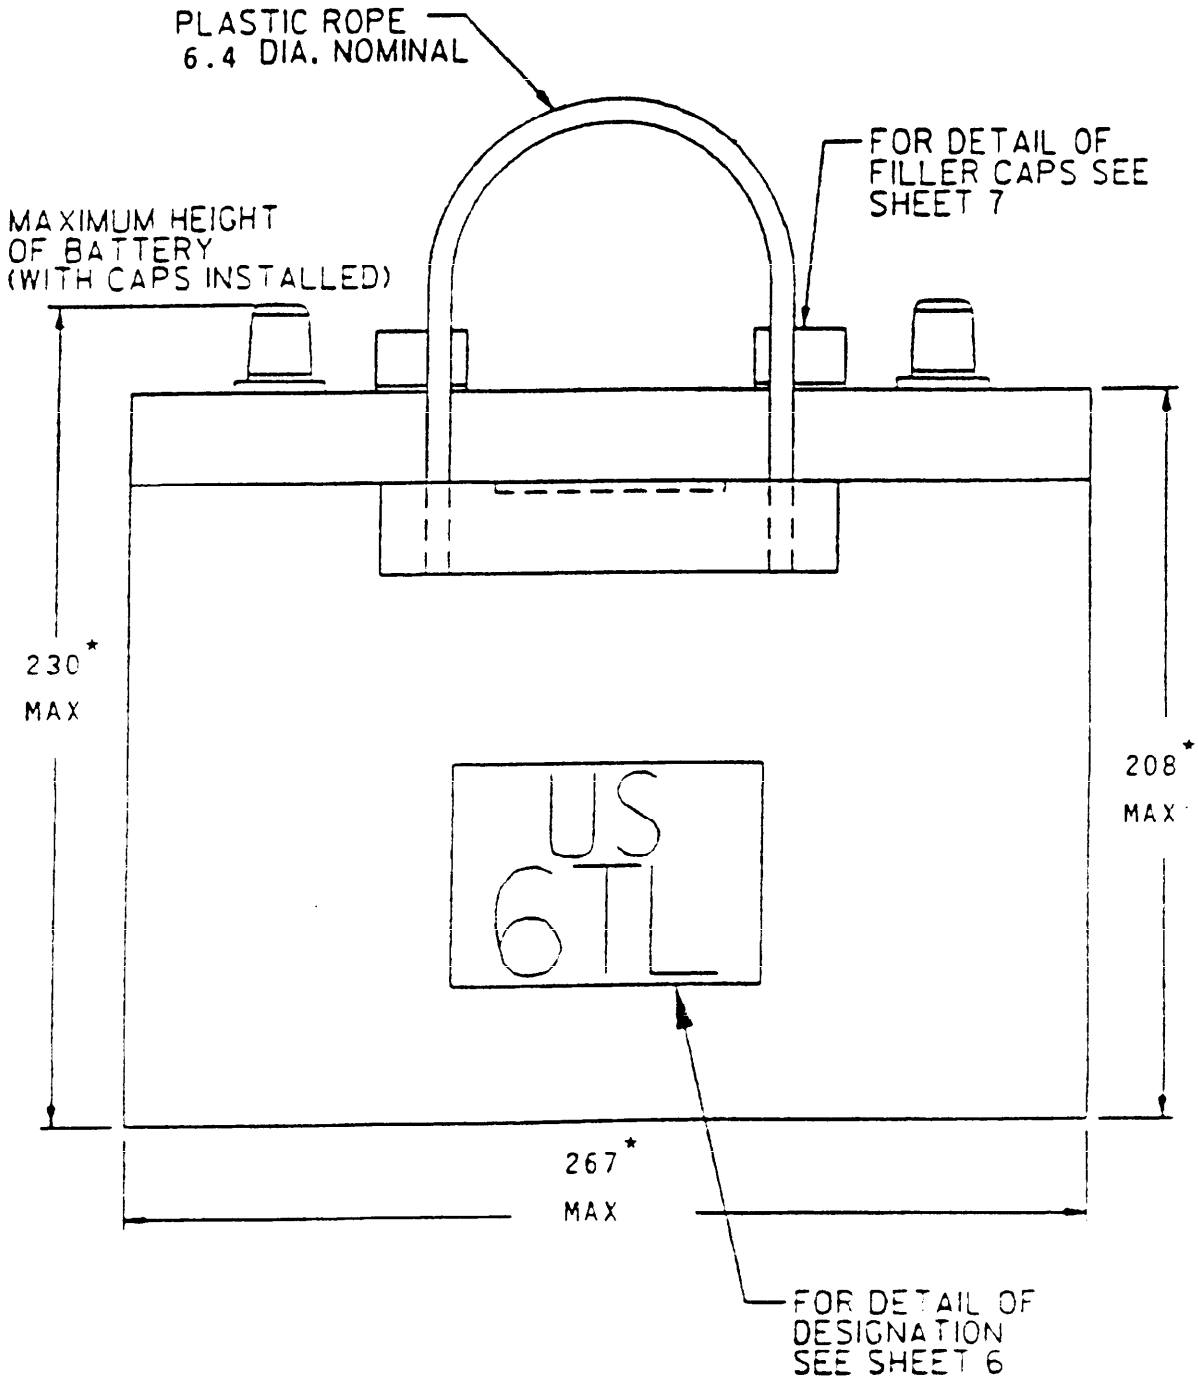


PREPARING ACTIVITY: AT CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 6140-A760	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE, LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL	SPECIFICATION SHEET NUMBER: MS52149G(AT) 8 September 1994 SUPERSEDING: MS52149F(AT) 27 MAY 1992 AMSC-NA FSC- 6140

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:21Z
Check the source to verify that this is the current version before use.


requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

POSTS

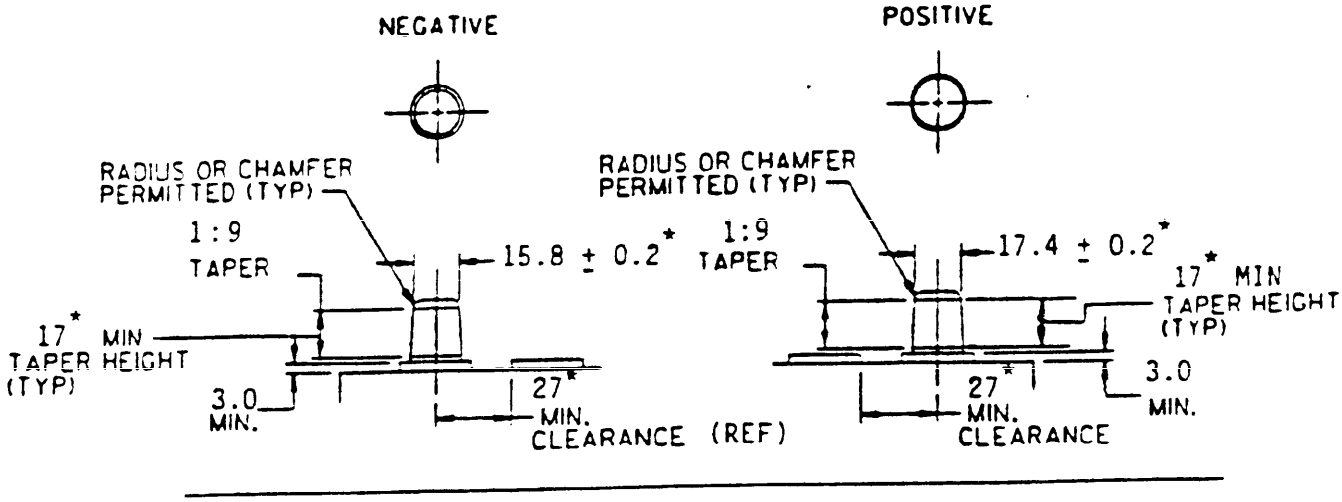

HANDLES (6TL)

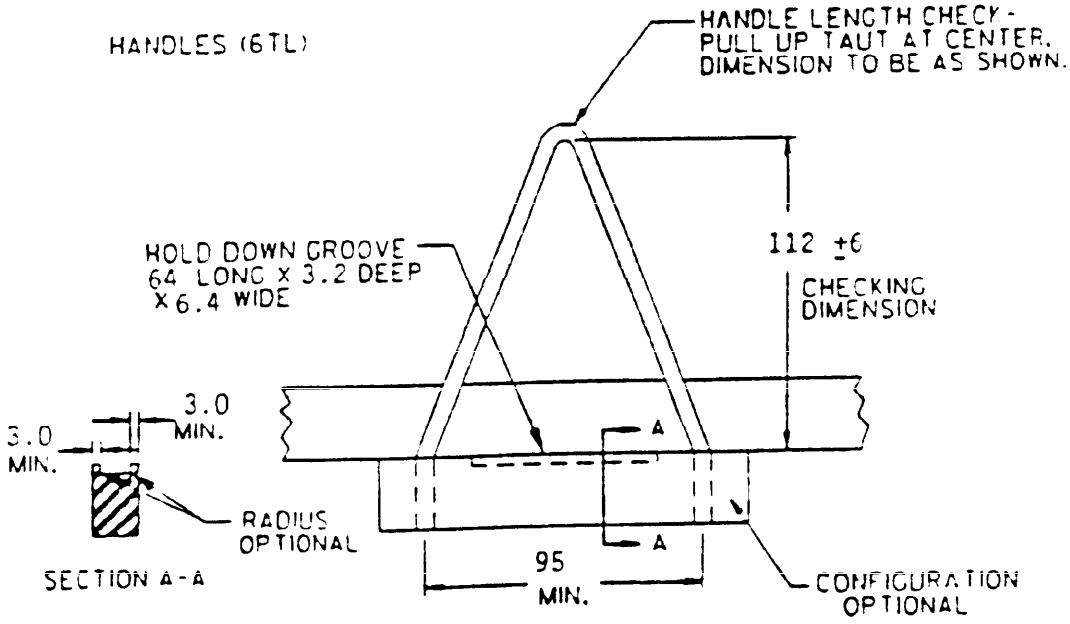


METHOD OF ROPE ATTACHMENT OPTIONAL

PREPARING ACTIVITY: AT CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 6140-A760	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE, LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL	SPECIFICATION SHEET NUMBER: MS52149G(AT) 8 September 1994 SUPERSEDING: MS52149F(AT) 27 MAY 1992 AMSC-NA FSC- 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

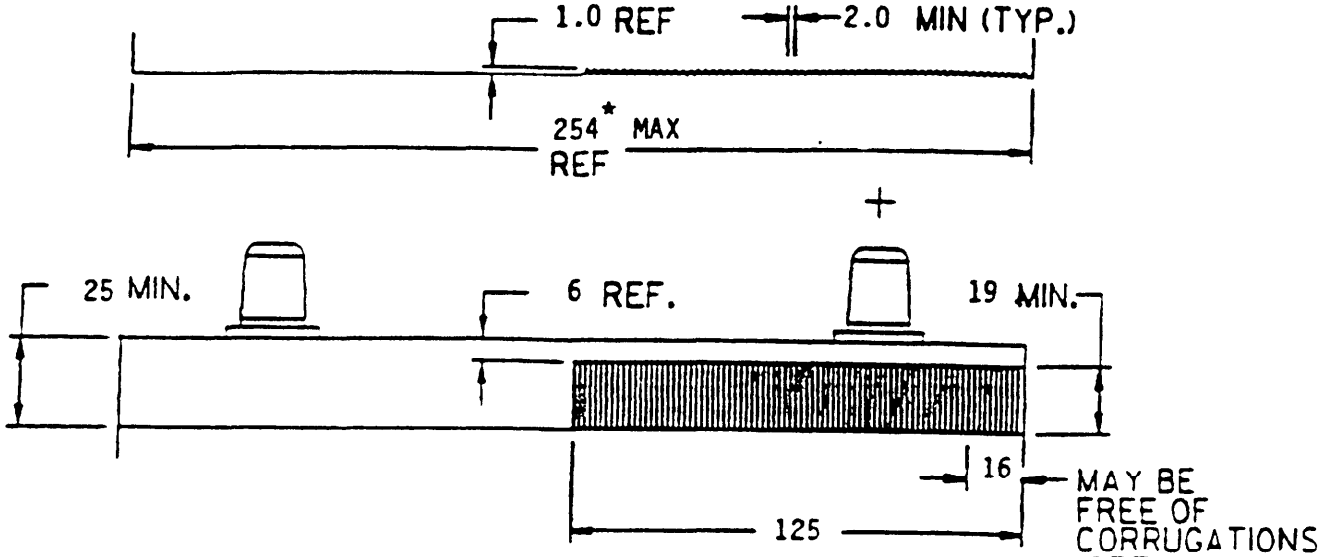

CORRUGATIONS NEAR POSITIVE POST

"US 6TL" MOLDED/DECAL DESIGNATION

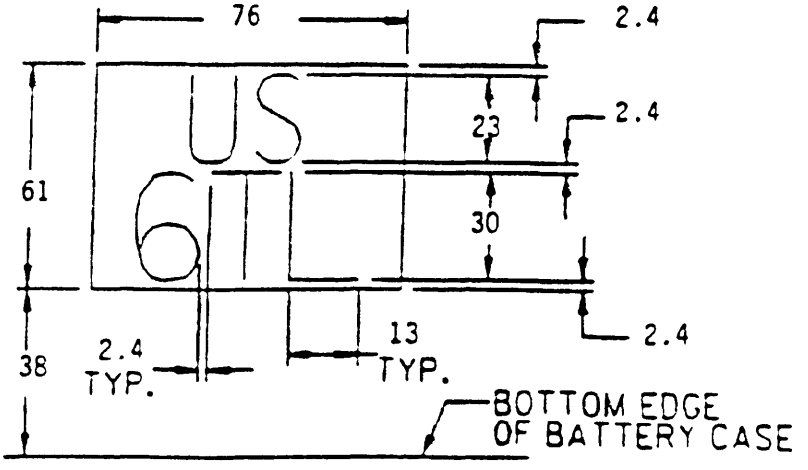

ALL DIMENSIONS MINIMUM.

ONE SIDE REQUIRED
(SECOND SIDE OPTIONAL)


Specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: AT CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 6140-A760	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE, LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL	SPECIFICATION SHEET NUMBER: MS52149G(AT) 8 September 1994 SUPERSEDING: MS52149F(AT) 27 MAY 1992 AMSC-NA FSC- 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

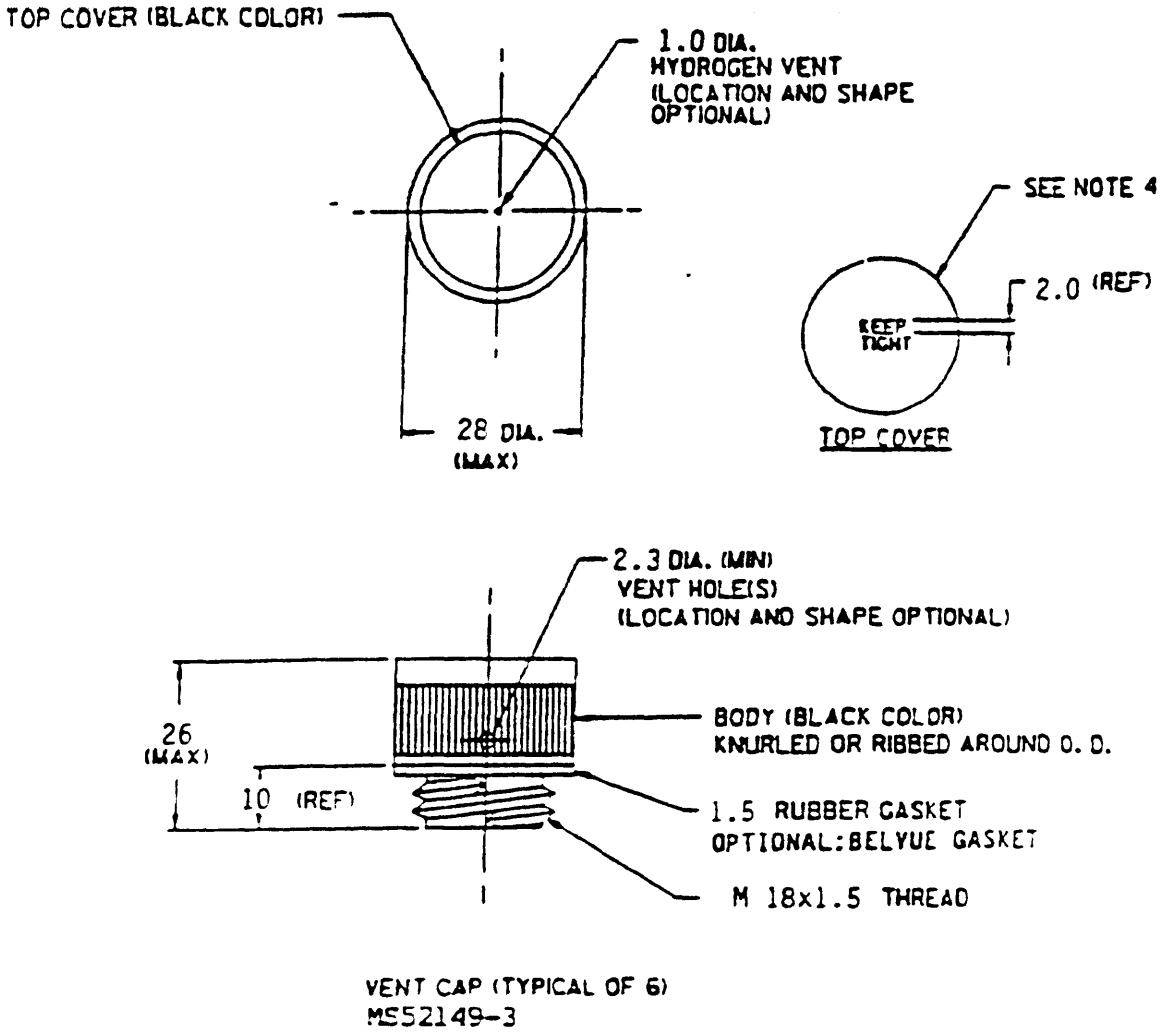

VENT CAP (TYPICAL OF 6)
MS52149-3

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE: ± 0.4 ON DECIMALS.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. UNLESS OTHERWISE SPECIFIED, MATERIAL SHALL BE POLYPROPYLENE, ULTRAVIOLET RESISTANT.
4. LETTERS ON TOP COVER SHALL BE BOLD GOTHIC, 0.5 MAXIMUM RELIEF.
5. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
6. CAP SHALL BE SUBMERSIBLE WITHOUT LEAKAGE PER PROCUREMENT SPECIFICATION.
7. VENT CAP(S) SHALL EXHIBIT FLAME RETARDANT CHARACTERISTICS PER SAE J1495.

Source: https://assist.dla.mil -- Downloaded: 202640-23T18:21Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

PHYSICAL AND ELECTRICAL REQUIREMENTS

CLASS	FE
NOMINAL WEIGHT (UNFILLED)	24 KG
NOMINAL WEIGHT (FILLED)	34 KG
NOMINAL VOLTAGE	1[illegible] VOLTS
RESERVE CAPACITY	200 MINUTES
DISCHARGE RATE AND TIME TO 7.2 V:	
AT -18°C	600 AMP 30 SEC
AT -40°C	350 AMP 30 SEC
CHARGING CONSTANT POTENTIAL (SEE NOTE 6)	15.0 VOLTS

QUALIFICATION AND QUALITY CONFORMANCE INSPECTION REQUIREMENTS

TESTS	MINIMUM VALUES
COLD ACTIVATION @ -1°C	
DISCHARGE RATE AND TIME TO 7.2 V	450 AMP 60 SEC MINIMUM
RESERVE CAPACITY	200 MINUTES
DISCHARGE RATE AND TIME TO 7.2 V:	
AT -18°C	600 AMP 30 SEC
AT -40°C	350 AMP 30 SEC
LIFE CYCLE CAPACITY TEST	235 CYCLES
AMP HR CAPACITY @ 20 HR RATE	120 AMP HR (6.0 AMPS)
RETENTION OF CHARGE 40°C:	
RESERVE CAPACITY AFTER 30 DAYS	175 MINUTES
STORAGE LIFE AFTER 90 DAYS	450 AMP @ 60 SEC
VIBRATION RESISTANCE RES. CAP	190 MINUTES

REQUIREMENTS:

1. ELECTROLYTE SHALL NOT BE FURNISHED FOR CHARGED AND DRY BATTERIES.
2. CHARGED AND WET BATTERIES SHALL BE FILLED WITH ELECTROLYTE AND READY TO USE.
3. SIX (6) SUBMERSIBLE FLAME RETARDANT VENT PLUGS SHALL BE LOCATED ONLY IN RESPECT TO REQUIRED MINIMUM DISTANCE FROM TERMINAL POSTS AND SIDES OF BATTERY.
4. MARKING SHALL CONSIST OF THE SPECIFICATION SHEET PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.
5. COVER AND BASE TO BE PARALLEL WITHIN 1.5 MILLIMETERS TOTAL.

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: AT CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 6140-A760	MILITARY SPECIFICATION SHEET TITLE: BATTERY,STORAGE, LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL	SPECIFICATION SHEET NUMBER: MS52149G(AT) 8 September 1994 SUPERSEDING: MS52149F(AT) 27 MAY AMSC-NA FSC- 6140
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 8 of 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-62346

NOTES

1. DIMENSIONS ARE IN MILLIMETERS. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 2.0 MM.
2. THE SPECIFICATION SHEET PART NUMBER CONSISTS OF THE SPECIFICATION SHEET NUMBER FOLLOWED BY A DASH NUMBER.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN SHOWN HEREIN BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. FOR BOOST CHARGING AND ACTIVATION ONLY - NOT FOR VEHICLE SYSTEM VOLTAGE OUTPUT.
7. CERTAIN PROVISIONS OF THIS SPECIFICATION ARE IDENTIFIED BY AN ASTERISK (*) ARE SUBJECT TO INTERNATIONAL STANDARDIZATION AGREEMENTS NATO STANAG 4015, AND ABC-ARMY-STD-140. WHEN AMENDMENT, REVISION, OR CANCELLATION OF THIS SPECIFICATION IS PROPOSED THAT WILL MODIFY THE INITERNATIONAL AGREEMENTS CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, TO CHANGE THE AGREEMENT OR MAKE OTHER APPROPRIATE ACCOMODATIONS.
8. MARKS ARE NOT USED IN THIS REVISION TO IDENTIFY CHANGES WITH RESPECT TO THE PREVIOUS ISSUE DUE TO THE EXTENSIVENESS OF THE CHANGES.

Title	MS Part no.
Charged and dry	MS52149-1
Charged and wet	MS52149-2
Vent cap	MS52149-3

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: AT
CUSTODIANS: ARMY- NAVY- AIR FORCE- DLA-
REVIEW:
USER:
PROJECT NUMBER: 6140-A760

MILITARY SPECIFICATION SHEET

TITLE:

BATTERY, STORAGE, LEAD-ACID (LOW-MAINTENANCE) TYPE 6TL

SPECIFICATION SHEET NUMBER:
MS52149G(AT)
8 September 1994

SUPERSEDING:
MS52149F(AT) 27 MAY 1992

AMSC-NA FSC- 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.