MIL-G-21893C(NU)
30 April 1981
SUPERSEDING
MIL-G-21893B(SA)
9 April 1975

MILITARY SPECIFICATION

GLOVES, CLOTH, NYLON, KNITTED (DRESS, MEN'S)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by Departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for men's dress gloves, made of knitted nylon simplex material.

1.2 Classification. The gloves shall be of one type only, and in the following sizes as specified (see 6.2).

Schedule of sizes

7, 7-1/2, 8, 8-1/2, 9, 9-1/2, 10, 10-1/2, 11, 11-1/2, 12

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
V-T-295 - Thread, Nylon
DDD-L-20 - Label; For Clothing, Equipage, and Tentage (General Use)
PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-676 - Boxes, Setup

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing & Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 By using the self-addressed standardization Document Improvement Proposal (DDD Form 1426) appearing at the end of this document or by letter.

FSC 8440

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard, (Modular Sizes)
MIL-T-43548 - Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitching

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1612 - Provisions for Evaluating Quality of Gloves, Cloth, Dress

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents from a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Associations, Inc., ATTN: Traffic Department, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Standard sample. The finished gloves shall match the standard sample for shade, and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

3.3 First article. When specified, (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (See 4.3).

3.4 Materials.

3.4.1 Basic fabric. The basic fabric for the gloves shall be warp knitted on a Simplex knitting machine with a plain jersey stitch using 70 denier, 34 filament, semi-dull nylon yarn.

3.4.1.1 Color. The basic fabric shall be dyed Gray Shade 3120, and shall match the standard sample (see 6.3).

3.4.1.2 Matching. The color of the finished fabric shall match the standard sample under artificial daylight having a color temperature of 7500° Kelvin, and shall be a good approximation to the standard sample under incandescent lamp-light at 2800° Kelvin.

3.4.1.3 Colorfastness. The dyed and finished fabric shall show fastness to light, laundering, perspiration, and crocking equal to or better than the standard sample. When a standard sample is not available, the finished fabric shall show a minimum of "good" fastness to light, laundering, perspiration, and a Munsell Value for crocking not lower than 8.5. Testing shall be performed as specified in 4.4.1.

3.4.1.4 Physical requirements. The finished fabric shall conform to the requirements specified in Table I, when tested as specified in 4.4.1.

Table I - Physical requirements

Characteristic	Requirement	
	Minimum	Maximum
Weight, ounces per square yard	10.0	11.0
Wales per inch	54	-
Courses per inch	46	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

3.4.1.4.1 Finish. The fabric shall have a smooth sueded finish on both sides, and shall be fully heat set to meet the requirements specified in 3.4.1.4.2.

3.4.1.4.2 Dimensional stability. The finished fabric shall not shrink more than 4.0 percent in length (wale direction) nor more than 6.0 percent in width (course direction) when tested as specified in 4.4.1.

3.4.1.4.3 pH. The pH value of the finished fabric shall be not lower than 5.0 nor higher than 8.5 when tested as specified in 4.4.1.

3.4.2 Thread. The thread for seaming and stitching the gloves shall be cotton, conforming to type IC2, ticket No. B, 3-ply, of V-T-276. As an alternate, either a nylon or cotton-covered polyester thread may be substituted. The nylon thread, when applicable, shall conform to types I, II, or III, classes 1 or 2, size A or AA, of V-T-295. The cotton-covered polyester thread, when applicable, shall conform to size numbers 40 or 50 of MIL-T-43548. The cotton, nylon, or cotton-covered polyester thread, whichever is applicable, shall be dyed to match the basic fabric.

3.4.2.1 Colorfastness. The dyed thread shall show fastness to light, laundering (after 3 cycles), and perspiration equal to or better than the standard sample when tested as specified in V-T-276, V-T-295, or MIL-T-43548, whichever is applicable.

3.4.3 Labels.

3.4.3.1 Identification and size label. Each glove shall be marked with a combination identification and size label, conforming to type III or IV, class 4, of DDD-L-20. The color of the marking medium shall be either black or white. The printing on the glove shall show fastness to laundering only when tested in accordance with the requirements of DDD-L-20.

3.4.3.2 Instruction label. The instruction label to be inserted in either glove of each pair, shall be of a suitable lightweight paper measuring not less than 2-1/2 inches in width by 5 inches in length. The instruction label shall bear the following inscription typed or printed in black indelible ink.

GLOVES, CLOTH, NYLON, KNITTED (DRESS, MEN'S)
WASHING DIRECTIONS
WARNING: DO NOT USE HOT WATER OR BLEACH

a. Hand Washing.
   1. Soak gloves for about 5 minutes in a warm soap or synthetic detergent solution.
   2. Wash gloves by rubbing them together either on or off hands.
   3. Rinse gloves thoroughly with warm water and dry away from heat.

b. Machine Washing.
   1. Machine wash using soap or synthetic detergent in warm water and dry away from heat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

Lines 1 through 3 and all other capital letters shall be 1/8 inch in height. All other lower case lettering shall be 3/32 inch in height.

3.5 Design. The gloves shall be outseam sewn, a slip-on type, with a side vent, Bolton thumb, continuous inserted fourchette, and a piped top edge.

3.5.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.6 Patterns. Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.6.1 Pattern parts. The component parts of the gloves shall be cut from the basic fabric specified in 3.4.1, and in accordance with the following pattern parts required for the manufacturing process:

Nomenclature of pattern parts	Cut parts per pair
Body	2
Thumb	2
Fourchette	2

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in Table II shall conform to FED-STD-751. The use of a trimmer attachment on the sewing machine is prohibited.

3.7.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.7.3 Type 301 stitching. Ends of stitching shall be backstitched or backtacked not less than 3/8 inch, except where ends are caught in other seams and stitching.

3.7.3.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 3/8 inch back of the end of the stitching.

b. Thread breaks, or two or more consecutive skipped stitches or runoffs noted during inspection of the item (in-process or end item) shall be repaired. The stitching shall start a minimum of 3/8 inch back of the defective area, continue over the defective area and continue a minimum of 3/8 inch beyond the defective area onto the existing stitching. Loose or tight stitching shall be repaired by removing the defective stitching without damaging the material and restitching in the required manner. When making the above repairs, the ends of the stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

3.8 Manufacturing operations requirements. The gloves shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations, provided the finished gloves are identical to those produced by following the exact sequence as shown.

3.8.1 Shade and size marking. The component parts of the gloves shall be marked to insure a uniform shade and size assembly throughout the gloves. Any method may be used except:

(a) Corrosive metal fastening devices
(b) Sew-on type tickets
(c) Adhesive type tickets which discolor or adhere to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

Table II - Construction of gloves

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. The component parts of the gloves, excluding the binding, shall be die cut in strict accordance with the patterns furnished which show size, shape, directional lines for cutting, and notches for proper assembly of all component parts. b. Cut the binding for the top edge of each glove across the width of the nylon simplex material specified in 3.4.1, to finish 3/4 (± 1/8) inch in width. c. All component parts shall be cut from one piece of material, with the length of the part running in the wale (length) direction.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1612, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Marking Mark, ticket, or bundle all component cut parts to insure a uniform shade and size for proper assembly throughout the gloves (see 3.8.1).					
4.	Attach thumb Join the thumb piece to the body in one continuous operation with the seam 1/16 inch from the raw edges on the outside, simultaneously closing the thumb seam.	301	SSa-1	12-14	B	B

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

Table II - Construction of gloves (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Join continuous fourchette to fingers and close gloves					
	a. Stitch the continuous edge of fourchette to back of fingers, from the top inside edge of the first (index) finger to the top inside edge of the fourth (little) finger, with the seam gauge sewn 1/16 inch from raw edges on the outside of the glove.	301	SSa-1	12-14	B	B
	b. Stitch fourchette together at the base of the fingers within the "V" areas 1/16 inch from the raw edges. The seams shall finish on the inside of the glove.	301	SSa-1	12-14	B	B
	c. Join the palm to the back of the glove and fourchette with a continuous line of stitching beginning at the top, outside edge of the first (index) finger, continuing around to the fourth (little) finger and down the outside of the glove to the vent opening. The seam shall finish 1/16 inch from the raw edges on the outside of the glove.	301	SSa-1	12-14	B	B
6.	Attach binding					
	a. Stitch binding to outside top edge and around the vent of each glove face to face 1/16 to 3/32 inch from the raw edge, overlapping binding 3/8 to 1/2 inch with the overlapped edge positioned at the bottom of vent and toward the palm.	301	BSf-2(a)	12-14	B	B
	b. Turn binding over the top edge and vent with the raw edge on the inside to form a piping. Stitch raw edge of binding to glove close to the seamed edge of the piping. The piping roll shall finish 3/16 (± 1/16) inch in width.	301	BSf-2(b)	12-14	B	B

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

Table II - Construction of gloves (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Labeling Mark the inside center back of each glove with the legend specified in 3.4.3.1, positioning the top line of marking 1 (± 1/4) inch from the bottom edges of the piping. The marking shall be clearly visible. There shall be no evidence of the marking visible on the outside of the glove.					
8.	Trimming and cleaning Remove all spots, stains, and loose thread. Trim thread ends.					
9.	Finishing Form or lay-off gloves on proper size, fingered, heated, laying-off boards. The gloves shall not be dampened prior to laying-off.					
10.	Pairing The gloves shall be matched, paired, and tacked together palm to palm approximately 3/4 inch below the vent opening and approximately 1/8 inch in from the closing seam. Tacking shall be done with not less than 2 stitches, using a cord thread which will permit the gloves to be separated without tearing the fabric.					
11.	Instruction label Insert the instruction label as specified in 3.4.3.2 into either glove of the pair.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The finished gloves shall conform to the dimensions specified in Table III. All measurements are expressed in inches, and shall be taken without pulling or stretching.

Table III - Finished measurements

Measurement	Size											Tolerance
	7	7-1/2	8	8-1/2	9	9-1/2	10	10-1/2	11	11-1/2	12	
Overall length (A)	9-13/16	9-3/8	9-9/16	9-3/4	9-15/16	10-1/8	10-5/16	10-5/16	10-1/2	10-1/2	10-11/16	± 1/8
Width of palm (B)	3-1/16	3-1/4	3-7/16	3-5/8	3-13/16	4	4-3/16	4-3/8	4-9/16	4-3/4	4-15/16	± 1/16

NOTE: A and B refer to Figure 1.

A. Measurement taken from tip of middle finger to top edge of glove on palm side.

B. Measurement taken across palm, approximately 1/8 inch below the crotch of the fourth (little) finger.

3.10 Workmanship. The finished gloves shall conform to the quality established by this specification. The occurence of defects shall not exceed the applicable point values specified in MIL-STD-1612.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article, submitted in accordance with 3.3, shall be inspected as specified in 4.4.2 and 4.4.3 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated in MIL-STD-1612.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, testing shall be performed on the nylon fabric for the characteristics specified in Table IV and in accordance with the referenced test methods of FED-STD-191. The physical and chemical values specified in Section 3, apply to the average of the determinations made on a sample unit for test purposes as specified in the applicable test method. The sample unit shall be 2 continuous yards, full width of the finished fabric. The lot size shall be expressed in terms of one yard. All test reports shall contain the individual values utilized in expressing the final results. The sample size (number of sample units), shall be as shown below:

Lot size (yards)	Sample size (units)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

Table IV - Component tests

Characteristic	Requirement paragraph	Test method
Nylon		
Identification	3.4.1	1530 1/
Denier	3.4.1	4021 1/
Number of filaments	3.4.1	1/
Luster	3.4.1	1/
Type of knit	3.4.1	Visual 2/
Colorfastness to:		
Light	3.4.1.3	5660
Laundering	3.4.1.3	5614
Perspiration	3.4.1.3	5680
Crocking	3.4.1.3	5651
Weight	3.4.1.4	5041
Wales and courses per inch	3.4.1.4	5070
Dimensional stability	3.4.1.4.2	5552
pH	3.4.1.4.3	2811

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

2/ One determination shall be made from each sample unit and the results reported as "pass" or "fail".

4.4.2 Examination of the end item. The end item examination provisions for finished gloves shall be as specified in MIL-STD-1612, or as specified herein.

4.4.3 Dimensional examination. The dimensional examination provisions for finished gloves shall be as specified in MIL-STD-1612.

4.4.4 Examination of packaging requirements. The examination for compliance with the packaging, packing and marking requirements shall be as specified in MIL-STD-1612.

Source: https://assist.dla.mil -- Downloaded: 202640-19T10:43Z
Check the source to verify that this is the current version before use.

1 5. PACKAGING

5.1 Preservation Packaging. Packaging shall be level A or C (commercial) as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each pair of gloves shall be inserted in a flat style clear polyethylene film bag of 0.00125-inch thickness (± 25% tolerance). The bag shall measure approximately 12 by 6 inches. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The unsealed opening shall be at the smaller dimension of the bag. The bag may be fabricated from polyethylene film tubing or sheeting.

5.1.1.2 Intermediate packaging. Six pairs of gloves of one size only, bagged as specified, shall be placed flat in a paperboard box conforming to type I or II, variety I, class A, type 4, of PPP-B-676, or variety 1, style III, type G, class i or j, of PPP-B-566. Outside dimensions of each box shall be 11-1/2 inches in length, 5-1/8 inches in width, and 2-3/8 inches in depth. Box closure shall be secured with a commercial 2 inch minimum width gummed paper tape, applied along the center of the length opening and extending along the bottom and up the sides approximately 2 inches.

5.1.2 Level C (Commercial). Gloves shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C (commercial) as specified (see 6.2).

5.2.1 Level A. Fifty-four pairs of gloves of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, size 1, of MIL-B-17757. Level A packages shall be arranged flat, three in length, one in width, and three in depth within the shipping container. Toward the end of the contract, or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B. Fifty-four pairs of gloves of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 200, size 1, of MIL-B-17757. Level A packages shall be arranged flat, three in length, one in width, and three in depth within the shipping container. Toward the end of the contract, or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial) Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information listed below, legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag, so as to permit ready identification:

NOMENCLATURE: Gloves, Cloth, Knitted Nylon (Dress, Men's)
STOCK NO.: 8440-00-000-0000 (example)
SIZE: 9-1/2 (example)
QUANTITY: One (1) pair

5.3.2 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and sides, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity of sizes contained therein.

6. NOTES

6.1 Intended use. The gloves are intended for use by male Coast Guard and Naval officers, NROTC, Midshipmen, and Aviation Cadets with the Service and dinner dress uniforms.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. Whether first article sample is required (see 3.3).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B Packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 202610-19T10:43Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the Invitation for Bids.

Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review activity:
DLA-CT

Project No. 8440-N130

User activity:
Navy - CG

Source: https://assist.dla.mil Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

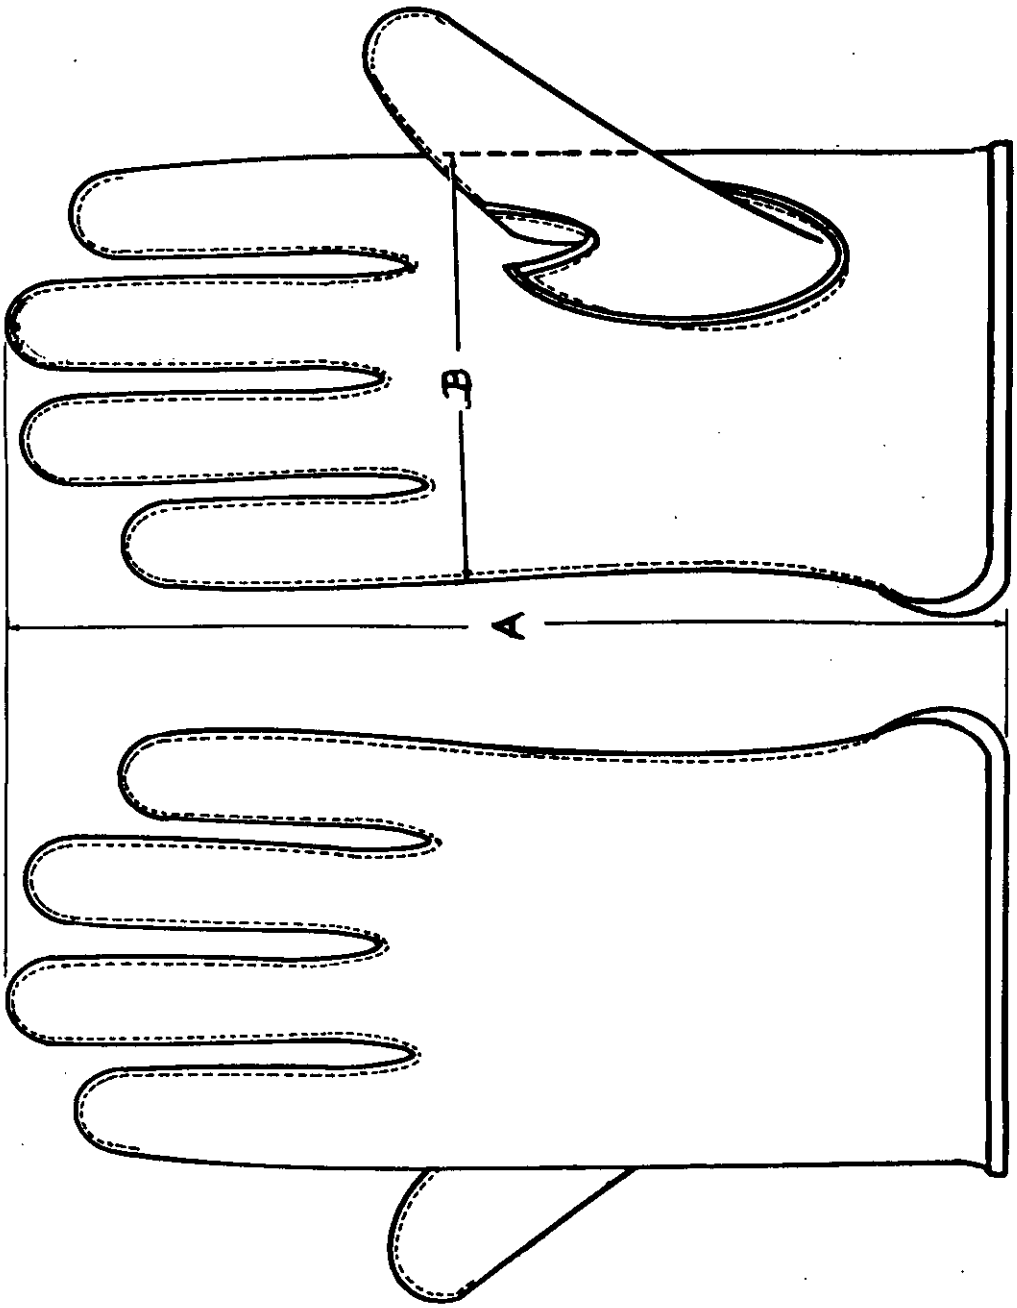


Figure 1 — GLOVES, CLOTH, NYLON, KNITTED (DRESS, MEN'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer In Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-G-21893C(NU) GLOVES, CLOTH, NYLON, KNITTED (DRESS, MEN'S)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:43Z
Check the source to verify that this is the current version before use.