INCH-POUNDS

MIL-I-21899D(NU)
16 October 1990
SUPERSEDING
MIL-I-21899C(NU)
25 October 1982

MILITARY SPECIFICATION

INSIGNIA, BRANCH OF SERVICE (COLLAR AND SLEEVE)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for metal and metallic embroidered insignia for collar and sleeve.

1.2 Classification. Insignia shall be of the following types, classes and styles (see 6.2):

Type I - Metal

Class 1 - Coat collar (anchor)

Style A - Naval Aviation Officer Candidates - Officer Candidates - Navy Enlisted Dietitian Education Program Students - Navy Enlisted Nurses Education Program Students - Navy Enlisted Scientific Education Program Students (see 3.7.1.1)

Style B - Naval Academy Midshipmen - NROTC Midshipmen (see 3.7.1.2)

Class 2 - Shirt collar (eagle-anchor) - Naval Academy Midshipmen - NROTC Midshipmen (see 3.7.2)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

Type I - Metal (cont'd)

Class 3 - Shirt collar (fouled anchor) - Naval Academy Midshipmen - NROTC Midshipmen - Naval Aviation Officers Candidates - Naval Reserve Officer Candidates - Navy Enlisted Nurses Education Program Students - Navy Enlisted Dietitian Education Program Students - Navy Enlisted Scientific Education Program Students (see 3.7.3)

Class 4 - Collar and sleeve (bars) - Naval Academy Midshipmen - Aviation Officers Candidates - Aviation Reserve Officer Candidates - Officer Candidates - Naval Reserve Officer Candidates - NROTC Midshipmen (see 3.7.4)

Class 5 - Coat collar (star) - Naval Academy Midshipmen - NROTC Midshipmen - Navy Enlisted Dietitian Education Program Students - Navy Enlisted Nurses Education Program Students - Navy Enlisted Scientific Education Program Students (see 3.7.5)

Type II - Metallic embroidered

Class 1 - Coat (sleeve-rating badges)

Style A - Naval Academy and NROTC Midshipmen, Battalion CPO (see 3.8.1.1)

Style B - Naval Academy and NROTC Midshipmen, Company CPO (see 3.8.1.2)

Style C - Naval Academy and NROTC Midshipmen, Mustering PO, Platoon (see 3.8.1.3)

Style D - Naval Academy and NROTC Midshipmen, Platoon PO, 1st Class (see 3.8.1.4)

Style E - Naval Academy and NROTC Midshipmen, Platoon PO, 2nd Class (see 3.8.1.5)

Style F - Naval Academy Midshipmen, Brigade CPO (see 3.8.1.6)

Style G - Naval Academy Midshipmen, Regimental CPO (see 3.8.1.7)

Class 2 - Coat (sleeve-distinguishing marks)

Style A - Naval Academy and NROTC Midshipmen - Member, Midshipmen Drum and Bugle Corps (see 3.8.2.1)

Style B - Naval Academy Midshipmen - Navy "E" (see 3.8.2.2)

Class 3 - Coat (sleeve-star, rank insignia)

Style A - Officer Candidates - Aviation Officers Candidates - Aviation Reserve Officer Candidates - Navy Enlisted

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

Dietitians Education Program Students - Navy Enlisted
Nurses Education Program Students - Navy Enlisted
Scientific Education Program Students (see 3.8.3.1)

Style B - Naval Academy Midshipmen - NROTC Midshipmen (see 3.8.3.2)

Type III - Lace, Insignia (rank and class)

Class 1 - Sleeve, Insignia, Rank - NROTC Midshipmen

Style A - Captain (see 3.9.1.1)

Style B - Commander (see 3.9.1.2)

Style C - Lieutenant Commander (see 3.9.1.3)

Style D - Lieutenant (see 3.9.1.4)

Style E - Lieutenant (Junior Grade) (see 3.9.1.5)

Style F - Ensign (see 3.9.1.6)

Class 2 - Sleeve, Insignia, Class - NROTC Midshipmen, Navy Enlisted Dietitians Eduction Program Students - Navy Enlisted Nurses Education Program Students - Navy Enlisted Scientific Education Program Students (see 3.9.2)

Style A - Senior (see 3.9.2.1)

Style B - Junior (see 3.9.2.2)

Style C - Sophomore (see 3.9.2.3)

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
CCC-C-440	- Cloth, Cheesecloth, Cotton, Bleached and Unbleached
PPP-B-566	- Box, Folding, Paperboard
PPP-B-636	- Box, Shipping, Fiberboard
PPP-B-665	- Box, Paperboard, Metal Edged and Components
PPP-B-676	- Boxes, Setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-16290	- Cloth, Melton, Wool (Moth Proofed)
MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic
MIL-C-82252	- Cloth, Broadcloth, Wool and Wool Synthetic (Moth-Proofed)

STANDARDS

FEDERAL

FED-STD-151	- Metal; Test Methods
FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-2073-1	- DoD Materials Procedures for Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5094.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. Postal Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Shades for Heraldic Yarns for Embroidery and Ribbons

(Applications for copies should be addressed to the Color Association of the United States, 343 Lexington Ave., New York, NY 10016-0927.)

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Method No. 8 Colorfastness to Crocking: AATCC Crockmeter Method

(Applications for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.1.1 Government loaned property. Hubs, when furnished by the Government, shall be used only for making the contractor's working dies. The contractor's stamping and embossing dies shall be tooled and polished to remove dents, scratches and all other imperfections. When hubs are furnished by the Government, they shall be used for making the contractor's working dies for one contract only (see 6.4).

* 3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection, in accordance with 4.3.

3.3 Material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

* 3.3.1 Copper base alloys. The copper base alloy shall be roll polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregations, and foreign inclusions that will not be removed in later processing. The copper base alloy shall be of a composition as specified in Table I, when tested as specified in 4.4.1.

Table I - Chemical composition (percent)

Alloy	Copper	Nickel	Lead (max)	Zinc	Iron (max)	Others (max)
Red brass	84.0 - 86.0	-	0.05	remainder	0.05	0.15
Yellow brass	64.0 - 68.5	-	0.15	remainder	0.05	0.15
Nickel silver	63.0 - 66.5	16.5 - 19.5	0.10	remainder	0.25	0.50
Nickel Silver (prong only)	53.5 - 56.5	16.5 - 19.5	0.05	remainder	0.25	0.50

* 3.3.2 Gold-plated material. Gold for electroplating shall be 24 Karat (see 4.4.1.1).

* 3.3.2.1 Gold plating. Gold specified in 3.3.2 shall be used for gold plating. Prior to plating the metal insignia shall be cleaned of matter that may affect the gold plating process. The plating shall have a mirror-like polish and finish and shall be non-porous and continuous over the entire surface and there shall be no cut through, blistering or peeling. Metal insignia, to be gold plated, shall be made from either red brass or yellow brass as specified in Table I. The gold-plated surface shall show no visible chemical reaction when tested as specified in 4.5.2.

* 3.3.3 Lacquer. The lacquer shall be a clear, pale, nonpigmented synthetic type. The dry lacquer film shall be continuous, level, adherent, and free from dust, lint and other foreign inclusions. When tested as specified in 4.4.1.1, the tissue paper shall not adhere to the lacquered surface.

3.3.4 Attachment device. The attachment device shall be of the prong and clutch type as shown in Figure 1 and as specified herein. The prongs shall be made of nickel silver as specified in Table I and shall be hard soldered or electronically fused to the back of the insignia (see 4.4.1.1). Approximate position of prongs is indicated in Figure 1. Clutches may be made from any type brass. When the size of metal insignia is a limiting factor and distance between prongs precludes use of clutch size specified in Figure 1, the clutches shall be 3/8 (± 1/32) inch in diameter. When tested as specified in 4.4.4, the clutch shall not be removable by hand except when the release wings are depressed. Location of prongs shall be in accordance with Figures 2 and 3 and 3.7.4.1.

3.3.5 Hard solder. Hard solder shall be a silver alloy having a melting point of not less than 1075° F when tested a specified in 4.4.1.1.

3.3.6 Embroidery material (metallic). The metallic embroidery materials shall conform to type I, classes 1 through 7 of MIL-E-17568.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

* 3.3.7 Thread, cotton. Cotton thread for sewing on chevron strips shall be shade Gold TX, C.A., No. 66087, type IA3, ticket No. 40, 3 ply; and for cover-stitching shall be shade Black AA, C.A. No. 66043, type IC2, ticket No. 00, 3 ply, conforming to the requirements of V-T-276. The use of sulphur dyes is prohibited. Thread shade shall be in accordance with the Department of Defense Standard Shades for Heraldic Yarns.

* 3.3.8 Yarn, rayon. The rayon yarn used for highlights of the embroidered insignia, when specified, shall be a continuous filament regenerated cellulose type, shade Black HAN, C.A. No. 67138, in accordance with the Department of Defense Standard Shades for Heraldic Yarns. The use of sulphur dyes is prohibited.

* 3.3.8.1 Colorfastness. The yarn shall show fastness to light, laundering (3 cycles), wet-dry cleaning and perspiration equal to or better than the standard sample when tested as specified in 4.4.1. As a limit of acceptability or when no standard sample is available, the yarn shall show good fastness to light, laundering (3 cycles), wet-dry cleaning and perspiration when tested as specified in 4.4.1.

3.3.9 Nylon braid. Nylon braid used for chevron stripes in metallic embroidered insignia shall be 1/8 (+ 1/32, -0) inch wide weighing 9.5 (± 0.5) ounces per gross yards. It shall be made of 2-ply mercerized cotton stuffer ends with an outer covering of nylon. The braid shall have one vellum consisting of 21 stuffer ends (min.) with an additional 7 stuffer ends (min.) on each side of the vellum. The outer covering shall completely cover the stuffer ends and shall be made with 8 carriers (min.) with 2 ends of nylon per carrier. Testing shall be performed as specified in 4.4.1.

* 3.3.9.1 Color. The nylon braid shall be dyed shade Gold HF, C.A. No. 67106 in accordance with the Department of Defense Standard Shades for Heraldic Yarns, to approximately match the metallic embroidery material specified in 3.3.6. The use of sulphur dyes is prohibited.

* 3.3.9.1.1 Colorfastness. The dyed braid shall show colorfastness to light, crocking and wet-dry cleaning equal to or better than the standard sample when tested as specified in 4.4.1. As a limit of acceptability or when no standard sample is available, the dyed braid shall show a minimum of "good" fastness to light, wet-dry cleaning and shall show a dry crocking rating not lower than 3 and a wet crocking not lower than 2 when tested as specified in 4.4.1.

3.3.10 Base cloth.

3.3.10.1 Cloth, broadcloth. The base cloth for embroidered insignia shall be type I, class 3, conforming to MIL-C-82252. The color shall match Blue 3346.

3.3.10.2 Cloth, melton. The base cloth for embroidered insignia shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

type I, class 2, conforming to MIL-C-16290. The color shall match Blue 3346.

3.3.11 Cotton backing. The cotton cloth used to reinforce the type II embroidered insignia shall conform to the physical requirements of types I and II of CCC-C-440, except that the material may be bleached, unbleached or dyed and the cloth shall be heavily sized to a finished weight of 5.85 (± 1.00) ounces per square yard.

3.4 Design. When a government loaned hub is not furnished for the design of the type I metal insignia, the contractor shall furnish his own hub.

3.5 Figures. Figures are furnished for information purposes only. If there are any inconsistencies between the written specification and the figures, the written specification shall govern.

3.6 Construction and finish of metal insignia.

3.6.1 Stamping, trimming, and piercing. Metal insignia shall be struck in such a manner to insure a well defined die struck edge. The insignia shall be trimmed and when applicable pierced to the die struck outline. All edges shall be clean, smooth, free from burrs, drag, step and rough edges. The stamping, trimming, and piercing operations shall not damage or distort the design of the insignia.

3.6.2 Forcers. The use of a forcer is not permitted.

* 3.6.3 Soldering or electronic fusion. Soldered or fused joints shall be strong, clean, smooth and free of burned or reduced areas. Soldered joints shall be cleaned of excess solder and flux. All joints shall be either hard soldered or electronically fused. When solder is used, the material specified in 3.3.5 shall be used. When tested as specified in 4.4.4., fused joints shall not crack or separate and the prongs shall not separate at the fused joint.

* 3.6.4 Lacquering. All surfaces of the metal insignia shall be coated with lacquer (see 3.3.3). The dry lacquer film shall be continuous, level, adherent and free from dust, lint and other foreign inclusions. A piece of tissue paper shall not adhere to the finished lacquered metal device when tested as specified in 4.4.4. When tested as specified in 4.4.4, there shall be no change in the lacquered face of the insignia, except for a slight yellowing of the highlights.

3.7 Type I metal insignia.

3.7.1 Class 1 - Coat collar.

3.7.1.1 Style A (Fouled anchor). The coat collar insignia shall be a fouled anchor made from either yellow or red brass as specified in Table I and gold plated as specified in 3.3.2.1. The design and dimensions of the insignia shall be extracted from the Government loaned hubs and shall be furnished in rights and lefts (see Figure 2). The thickness at the middle of

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

the insignia (length) shall be a minimum of 0.085 inch. The attachment device shall be two prongs and clutch fasteners.

3.7.1.2 Style B (Plain anchor). The coat collar insignia shall be a plain anchor with the stock at an angle of 8 degrees from the horizontal. Insignia shall be made from either yellow or red brass as specified in Table I and gold plated as specified in 3.3.2.1. The design and dimensions of the insignia shall be extracted from the Government loaned hubs and shall be furnished in rights and lefts (see Figure 2). The thickness at the middle of the insignia (length) shall be 0.075 inch minimum. The attachment device shall be two prongs and clutch fasteners.

* 3.7.2 Class 2 - Shirt collar (Eagle/Anchor). The shirt collar insignia (see Figure 3) shall be an eagle/anchor made from either yellow or red brass as specified in Table I and gold plated as specified in 3.3.2.1. The design and dimensions of the insignia shall be extracted from the Government loaned hubs and shall be 0.103 inch minimum thickness (middle of insignia). The attachment device shall be two prongs and clutch fasteners. The insignia shall be furnished in rights and lefts.

3.7.3 Class 3 - Shirt collar (Fouled anchor). The shirt collar insignia shall be a fouled anchor made from either yellow or red brass as specified in Table I and gold plated as specified in 3.3.2.1 (see Figure 3). The thickness at the middle of the insignia (length) shall be a minimum of 0.070 inch. The attachment device shall be two prongs and clutch fasteners. Insignia shall be furnished in rights and lefts.

3.7.4 Class 4 - Collar and sleeve (Bars).

3.7.4.1 Shirt collar (Naval Academy Midshipmen and NROTC Midshipmen). The shirt collar insignia indicating rank shall be made from either yellow or red brass as specified in Table I and gold plated as specified in 3.3.2.1. The design and dimensions of insignia shall be extracted from the Government loaned hubs. Connecting straps, which are an integral part of the insignia shall be the same thickness, 1/16 inch wide, and located 1/8 inch from the ends of each bar. The insignia shall be one piece and the backs shall be flat (see Figure 4). Attaching device shall be two prongs and clutch fasteners. The insignia shall be furnished in pairs. The number of bars and the location of the attaching device shall be as follows:

Rank	No. of Bars	Location of Prongs
Captain	6	Centered on outermost bars
Commander	5	Centered on outermost bars
Lieutenant Commander	4	Centered on outermost bars
Lieutenant	3	Centered on outermost bars
Lieutenant (Junior Grade)	2	Placed diagonally opposite at the vertex of each bar
Ensign	1	Centered on ends of bar

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

3.7.4.2 Coat collar, shirt collar and sleeve - (Naval Aviation Officer Candidates and Aviation Reserve Officer Candidates). The coat collar, shirt collar and sleeve rank insignia shall be the same as the shirt collar rank insignia as specified in 3.7.4.1, except that the highest officer candidate rank authorized is that of Commander (see Figure 4).

3.7.4.3 Coat collar, shirt collar and sleeve - (Officer Candidates and Naval Reserve Officer Candidates). The coat collar, shirt collar, and sleeve rank insignia shall be the same as specified in 3.7.4.1, except that the highest officer candidate rank authorized is that of Commander.

3.7.5 Class 5 - Coat collar (Achievement Star). The star shall be made from either yellow or red brass as specified in Table I and gold plated as specified in 3.3.2.1. The design and dimensions of the insignia shall be extracted from the Government loaned hubs. The insignia shall have two different length prongs soldered to the back of the insignia and one clutch fastener (see Figure 5). The insignia shall be furnished in pairs.

3.8 Type II - Metallic embroidered insignia.

3.8.1 Class 1 - Coat sleeve, rating badge.

3.8.1.1 Style A. The sleeve insignia shall consist of an eagle and fouled anchor in combination with three (3) chevron stripes and two (2) stars. Each star shall be constructed as specified in 3.8.3.1, except that it shall be of a size to be inscribed in a 1 inch diameter circle. The stars shall be arranged horizontally, 2 inches apart, with the center of the stars 7/8 inch above the upper edge of the eagle's wings. One point of each star shall be pointing down. The entire base fabric of the insignia shall be reinforced with material conforming to type I of CCC-C-440 (see 3.3.11), with the eagle and anchor having an additional reinforcement of material conforming to type II of CCC-C-440 (see 3.3.11). Gold nylon braid chevrons shall be stitched to the base fabric and reinforcement material with gold colored cotton thread (see 3.3.7) using stitch type 301 of FED-STD-751 and stitched along both edges of the braid. The ends of the nylon braid chevrons shall fit into slits cut in the base fabric and the slits and chevrons coverstitched with black thread (see 3.3.7). There shall be a border of base fabric a minimum of 3/4 inch around the insignia (see Figure 6).

* 3.8.1.2 Style B. The sleeve insignia shall be the same as specified in 3.8.1.1, except that there shall be one star, the center of which shall be 7/8 inch above the eagle's head (see Figure 7).

* 3.8.1.3 Style C. The sleeve insignia shall be the same as specified in 3.8.1.2, except that there shall be no star above the eagle (see Figure 8).

* 3.8.1.4 Style D. The sleeve insignia shall be the same as specified in 3.8.1.3, except that the arch above the chevrons shall be omitted (see Figure 9).

* 3.8.1.5 Style E. The sleeve insignia shall be the same as specified in 3.8.1.4, except that the lower chevron shall be omitted (see Figure 10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

* 3.8.1.6 Style F. The sleeve insignia shall be the same as specified in 3.8.1.1, except that there shall be four (4) stars positioned above the eagle. The center of the two lower stars shall be 7/8 inch above the upper edge of the eagle's wings and shall be 2 5/16 inches apart. The centers of the two (2) upper stars shall be 2 3/16 inches above the upper edge of the wings and shall be 1 3/8 inches apart. One point of each star shall point down (see Figure 11).

* 3.8.1.7 Style G. The sleeve insignia shall be the same as specified in 3.8.1.1, except that there shall be three (3) stars above the eagle's head, arranged in the form of a triangle. The centers of the two lower stars shall be 7/8 inches above the upper edge of the eagle's wings and shall be 2 3/8 inches apart. The center of the upper star shall be 1 11/16 inches above the eagle's head (see Figure 12).

3.8.2 Class 2 - Coat sleeve, distinguishing marks.

* 3.8.2.1 Style A. The sleeve insignia shall be a bugle embroidered in gold (see 3.3.6) and reinforced on the back with material conforming to type II of CCC-C-440 (see 3.3.11 and Figure 13).

* 3.8.2.2 Style B. The sleeve insignia shall be a block type letter "E" embroidered in gold (see 3.3.6) and reinforced on the back with material conforming to type II of CCC-C-440 (see 3.3.11 and Figure 13).

3.8.3 Class 3 - Coat sleeve star, rank insignia.

* 3.8.3.1 Style A. The star for the sleeve rank insignia shall be a five-pointed star of a size to be inscribed in a circle 1 1/4 inches in diameter. It shall be embroidered in gold (see 3.3.6) and reinforced on the back with material conforming to type II of CCC-C-440 (see 3.3.11). Each ray of the star shall have a minimum of 15 stitches using metallic yarn conforming to class 1 of MIL-E-17568. The rays of the star shall be separated with yarn conforming to class 5 of MIL-E-17568, stitched over the ground stitches. A spangle conforming to class 7 of MIL-E-17568 shall be stitched to the top center of the star. A 1/2 inch minimum border of base fabric shall be on all sides of the star. The star shall be placed on the coat sleeve with one ray pointing down (see Figure 14).

* 3.8.3.2 Style B. The star for the sleeve rank insignia shall be the same as specified in 3.8.3.1, except that it shall be of a size to be inscribed in a circle, 1 inch in diameter and each ray shall have a minimum of eleven (11) stitches (see Figure 14).

3.9 Type III - Lace, insignia, sleeve (rank and class).

* 3.9.1 Type III, class 1 (rank). The rank insignia shall consist of a one piece broadcloth (see 3.3.10.1) background with nylon braid chevron stripes (see 3.3.9) designating rank. The ends of the nylon braid stripes shall fit into slits cut in the background fabric and the slits and ends of the braid shall be cover-stitched with black cotton thread (see 3.3.7) using stitch type 304 of FED-STD-751, with 45 to 48 stitches per inch. The width of the cover-stitching shall be a minimum of 1/16 inch Each braided stripe shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

stitched to the background fabric along each edge with gold cotton thread (see 3.3.7), using stitch type 301 of FED-STD-751, with 12 to 14 stitches per inch. There shall be a 1/2 inch minimum border of background fabric on all sides of the stripes (see Figure 15).

3.9 1.1 Style A. The Captain insignia shall be constructed as specified in 3.9.1 and shall have six (6) braided stripes.

3.9.1.2 Style B. The Commander insignia shall be constructed as specified in 3.9.1 and shall have five (5) braided stripes.

3.9.1.3 Style C. The Lieutenant Commander insignia shall be constructed as specified in 3.9.1 and shall have four (4) braided stripes.

3.9.1.4 Style D. The Lieutenant insignia shall be constructed as specified in 3.9.1 and shall have three (3) braided stripes.

3.9.1.5 Style E. The Lieutenant (Junior Grade) insignia shall be constructed as specified in 3.9.1 and shall have two (2) braided stripes.

3.9.1.6 Style F. The Ensign insignia shall be constructed as specified in 3.9.1 and shall have one (1) braided stripe.

3.9.2 Type III, class 2 (class). The class insignia, except for the length of the stripes, shall be constructed as specified in 3.9.1 (see Figure 16).

3.9.2.1 Style A. The senior insignia shall have three (3) braided stripes.

3.9.2.2 Style B. The junior insignia shall have two (2) braided stripes.

3.9.2.3 Style C. The sophomore insignia shall have one (1) braided stripe.

3.9.2.4 Freshmen. There shall be no stripes for freshmen.

* 3.10 Marking for identification. The contractor's hallmark, trademark or other identifying symbol shall be legibly stamped or embossed inconspicuously on the back of each metal device.

3 10.1 Cleaning of metal insignia. Each mounted card for all metal insignia (see 5.1) shall have the following statement printed on the face of the card:

TO CLEAN, RUB GENTLY WITH SOFT DRY CLOTH
DO NOT CLEAN WITH CHEMICALLY TREATED CLOTH OR ABRASIVE

3.11 Dimensional tolerances. Except as otherwise specified herein, the following tolerances shall apply:

Metal insignia	Hand embroidered insignia
less than 1/2 inch ± 1/64 inch	less than 1/2 inch ± 1/32 inch
1/2 inch and larger ± 1/32 inch	1/2 inch or larger ± 1/16 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

3.12 Workmanship. The finished insignia shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to acertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components and materials listed in Table II. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any requirement

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

specified. The sample size shall be as follows:

Lot Size	Sample Size
800 or less	2
801 through 22,000	3
22,001 and over	5

Table II - Testing of components

Component	Characteristic	Requirement paragraph	Test method	Sample unit	Determinations per sample unit	Results reported as
Copper base alloy (as applicable 1 lb.)	Chemical composition	3.3.1	FED-STD-151 Method 111 or 112	4 oz. composite	2	Nearest 0.1% alloy each element
Rayon yarn	Material ident 1/	3.3.8	1500 or 1520	50 yds.	1	Pass or fail
	Color 1/	3.3.8	Visual		1	Pass or fail
	Colorfastness to:					
	Light	3.3.8	5660		1	Rating
	Laundering (3 cycles)	3.3.8	5610		1	Rating
	Perspiration	3.3.8	5680		1	Rating
	Wet/dry cleaning	3.3.8	5622		1	Rating
	Presence of Sulphur 1/	3.3.8	2020		1	Pass or Fail
Nylon braid	Material ident 1/	3.3.9	1500 or 1520	50 yds.	1	Pass or fail
	Color 1/	3.3.9	Visual		1	Pass or fail
	Width	3.3.9	5020		6	Avg. to nearest 1/32 in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

Component	Characteristic	Requirement paragraph	Test method	Sample unit	Determinations per sample unit	Results reported as
Nylon braid cont'd	Weight	3.3.9	4.5.6		6	Avg. to nearest 0.5 oz.
	Stuffer ends	3.3.9	Visual		1	Pass or Fail
	No. of carriers	3.3.9	Visual		1	Pass or Fail
	Ends per carrier	3.3.9	Visual		1	Pass or Fail
	No. of vellum	3.3.9	Visual		1	Pass or Fail
	Colorfastness to:					
	Light	3.3.9.1.1	5660		1	Rating
	Crocking	3.3.9.1.1	5651		1	Rating
	Wet/dry cleaning	3.3.9.1.1	5622		1	Rating
	Presence of Sulphur 1/	3.3.9	2020		1	Pass or Fail
Cotton backing	Finished weight	3.3.11	5041	1/4 yd. full width	3	Avg. to nearest 0.01 oz.

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

4.4.1.1 In addition to Table II, the contractor shall submit a certificate of compliance for the materials and characteristics listed below:

Component	Characteristic	Requirement paragraph
Gold (for plating)	Karat	3.3.2
Lacquer	Material identification	3.3.3
Attachment device	Material identification	3.3.4
Hard solder	Material identification	3.3.5

4.4.2 In-process inspection. Inspection may be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.4.3 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.4.3.1 and 4.4.3.2. The applicable inspection levels and acceptable quality levels

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

(AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one completely fabricated insignia of each type, class, and style. The lot size shall be expressed in terms of the sample unit.

4.4.3.1 Visual examination. The finished insignia shall be examined for defects in accordance with the list below:

Examine		Defect	Classification Major	Minor
A.	General			
a.	Component and assembly	1. Any component or operation ommitted	X	
		2. Any component not as specified	X	
		3. Any operation not performed as specified	X	
B.	Type I, Metal			
a.	Color and finish	1. Color or finish on face does not match approved guide sample	X	
		2. Pits, scale, dents, nicks, cracks, drags, scratches, segregation or other blemish on face	X	
		3. Plating omitted on face	X	
		4. Plating not smooth, not continuous, cut through or porous on face	X	
		5. Lacquer missing, not complete, not smooth, flaking, blistered or peeling	X	
		6. Lacquer tacky to the touch		X
		7. Lacquer forms noticeable runs or contains foreign inclusions		
b.	Design	1. Does not conform to Government hubs and/or approved guide sample	X	
		2. Design warped, twisted, distorted	X	
c.	Workmanship	1. Edges not die-struck, not well defined		X
		2. Not trimmed to die-struck edge		X
		3. Edges not smooth, free from burrs or drags		X
		4. Double struck	X	
		5. Nicks, dents, scratches or gouges	X	
		6. Not pierced where required	X	
		7. Any solder spatter on face or edge	X	
		8. Solder on back exceeding 1/16 inch in any direction		X
		9. Any component damaged, broken or bent	X	
		10. Excess solder on back not removed		X
		11. Any component part not securely attached	X	
		12. Forcer used		X
		13. Metal burned, affecting appearance seriously	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

Classification Examine		Defect	Major	Minor
d.	Marking	1. Missing, illegible or incomplete		X
e.	Attaching device	1. Not positioned as specified		X
		2. Prong bent		X
		3. Clutch does not hold securely to prong	X	
		4. Any clutch missing		X
f.	Pairing	Not furnished in pairs when required	X	
C.	Type II, Embroidered and Type III, Lace			
a.	Base fabric	1. Any hole, cut, tear, misweave or visual mend	X	
		2. Spot, stain or discoloration		X
		3. Color not as specified		X
b.	Workmanship	1. Stripes not securely stitched	X	
		2. Number of stripes not as specified	X	
		3. Ends of stripes not coverstitched	X	
		4. Tight stitch tension, stripes distorted	X	
		5. Loose stitch tension, loosely exposed loops		X
		6. Broken stitches or stitching incomplete		X
		7. Broken, abraded, cut or tangled metallic yarn on face (Type II)	X	
		8. Design does not conform to approved guide sample (Type II)	X	
		9. Border material around insignia less than:		
		(1) 3/4 inch on Type II		X
		(2) 1/2 inch on Type III		X

4.4.3.2 Dimensional examination. Finished insignia shall be examined for defects of dimension. Any dimension not within the specified tolerances shall be classified as a defect. Dimensional tolerances shall be as specified in 3.11.

4.4.3.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units, for visual and dimensional examinations shall be as follows:

	Inspection level	AQL Major	AQL Total
For visual examination in 4.4 3.1.	II	2.5	10.0
For dimensional examination in 4.4.3.2	S-1	(one class)	2.5

* 4.4.4 Testing of the finished metal insignia. Completely fabricated metal

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

insignia shall be tested for characteristics listed in Table III. The sample unit for the test for fused joints shall be one, the inspection level shall be S-2 and the AQL shall be 6.5. The sample unit for all other applicable end item tests shall be two and the inspection level shall be S-1 and the AQL 4.0. Regardless of the number of prong failures on an individual sample, it shall be classified as one defective unit.

Table III - Tests on finished metal insignia

Characteristic	Requirement paragraph	Test Method
Test for gold plating	3.3.2.1	4.5.2
Test for lacquer finish	3.6.4	1/
Test for tackiness	3.6.4	4.5.1
Test for attaching device	3.3.4	4.5.3
Test for soldered joints	3.6.3	4.5.4
Test for electronically fused joints	3.6.3	4.5.5

1/ A certificate of compliance shall be submitted stating that insignia have been lacquered, when required.

* 4.4.5 Examination of packaging requirement. An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling, bulging or distortion of containers. Polyethylene bag improperly sealed, has open seam or excess air not expelled.
Content	Number of insignia per intermediate package is more or less than specified. 1/ Number of intermediate packages per shipping container is more or less than specified.

1/ For this defect, one intermediate package from each shipping container in the sample shall be examined.

4.5 Tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

4.5.1 Tackiness test. At room temperature of 60 to 80° F, press a piece of tissue paper against the lacquered surface for 15 seconds with any pressure capable of being exerted by the thumb and two fingers. Release finger pressure and inspect insignia to determine compliance with 3.6.4.

4.5.2 Acid test for gold plating. The test acid shall be applied as follows: Place a drop of test acid (each drop to be 1/16 inch diameter minimum) on three different spots on the gold plated surface. Allow the drops to remain for not less than 1 minute. During this time examine the surface to determine compliance with 3.3.2.1. The test acid applied at room temperature shall consist of a solution containing 50 percent by volume of CP nitric acid (specific gravity 1.42) and an equal volume of distilled water. The test shall be performed on metal insignia prior to lacquering or after lacquer has been removed from the finished insignia.

4.5.3 Test for clutch type fastening device. The clutch fastener shall be removed from each prong of the attaching device and replaced 10 times, after which it shall not be possible to remove any clutch fastener from its prong except by depressing the release wings.

* 4.5.4 Solder joint test. Samples to be tested shall be placed in an oven maintained at 1075° (± 5°) F for not less than 15 minutes. While at the specified oven temperature, samples shall be lifted by the attaching device and shall be inspected for compliance with 3.6.3.

4.5.5 Test for electronically fused joints. The item to be tested shall be anchored on a horizontal surface. The prong shall be grasped at least 1/3 its length above the fused joint and bent through an angle of 90 degrees (45 degrees to each vertical) until separation occurs. The fused joint shall then be examined to determine compliance with 3.6.3. A bending tool in the form of a 45 degree template may be used for this test provided the prong is gripped at least 1/3 its length above the fused joint.

* 4.5.6 Weight of nylon braid. Six specimens in excess of one yard each shall be selected at random from different spools in the sample. The six specimens of braid in the relaxed, conditioned state shall then be measured and cut to exactly one yard each. While at standard condition as defined in FED-STD-191, each yard shall be weighed separately on a balance or scale accurate to 0.01 ounce (a scale or balance graduated in grams may be used and results converted to ounces). The weight of the six specimens shall be averaged. This average value shall be multiplied by 144 to determine the ounces per gross (144) yards to the nearest 0.5 ounce, to determine compliance with 3.3.9.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Insignia, metal.

* 5.1.1.1.1 Unit preservation. One pair of insignia shall be mounted with respective attaching devices on a white sulphite cardboard having a minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

thickness of 0.011 inch. The cardboard shall be cut to a size extending approximately 1/2 inch beyond outer edges of insignia. Each mounted pair of metal insignia shall be individually packaged in a snug-fitting clear polyethylene film bag having a minimum thickness of 0.002 inch. All seams and closures shall be heat sealed. Prior to or during the heat sealing operation, excess air within the bag shall be expelled.

* 5.1.1.1.2 Intermediate preservation. One hundred (100) pairs of metal insignia of one class and style only, unit packaged as specified in 5.1.1.1.1 shall be placed in a setup paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676; folding paperboard box conforming to variety 1, style III, type G, class i, sub-class 1 of PPP-B-566; or metal stayed box conforming to class 1, style A of PPP-B-665.

5.1.1.2 Insignia, metallic embroidered and lace.

* 5.1.1.2.1 Unit preservation. Each embroidered insignia shall be individually preserved in a snug-fitting clear polyethylene film bag having a minimum thickness of 0.002 inch. All seams and closures shall be heat sealed. Prior to or during the heat sealing operation, excess air within the bag shall be expelled.

* 5.1.1.2.2 Intermediate preservation. Fifty embroidered insignia of one class and style only, unit packaged as specified in 5.1.1.2.1 shall be placed in a snug-fitting folding paperboard box conforming to variety 1, style III, type G, class i, sub-class 1 of PPP-B-566; setup paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676; or metal stayed box conforming to class 1, style A of PPP-B-665.

5.1.2 Level C. Insignia shall be preserved to afford adequate protection against physical damage during shipment from contractor to the first receiving activity The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5 2.1 Level A.

* 5.2.1.1 Insignia, metal. Six hundred pair of insignia of one class and style only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF, class weather-resistant, variety DW, grade V15c, style RSC of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced in conformance with the appendix of the box specification.

* 5.2.1.2 Insignia, metallic embroidered and lace. Five hundred insignia of one class and style only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF, class weather-resistance, variety DW, grade V15C, style RSC of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced in conformance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

* 5.2.2.1 Insignia, metal. Six hundred pair of insignia of one class and style only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF, class domestic, variety DW, grade 200, style RSC of PPP-B-636. Each shipping container shall be closed in accordance with method III of the appendix of the box specification.

* 5.2.2.2 Insignia, metallic embroidered and lace. Five hundred insignia of one class and style only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF, class domestic, variety DW, grade 200, style RSC of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of the box specification.

* 5.2.3 Level C. Insignia, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the U.S. Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers shall be marked in accordance with MIL-STD-129.

* 5.4 MIL-STD-2073. When specified (see 6.2) Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

* 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The collar and sleeve insignia covered by this specification are intended to designate Branch of Service and rank and class of Naval personnel as listed in 1.2.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Type, class and style required (see 1.2).
d. Availability of guide sample (see 3.1).
e. When first article inspection is required, (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

f. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2.

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids.

6.4 Government loaned hubs. For access to Government loaned hubs, address the procuring activity issuing the invitation for bids.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.
Devices, embroidered
Devices, metal
Personnel, enlisted and officer
Rank


Custodians.
Navy - NU

Preparing activity:
Navy - NU

Review Activity:
DLA-CT

Project No. 8455-N386

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

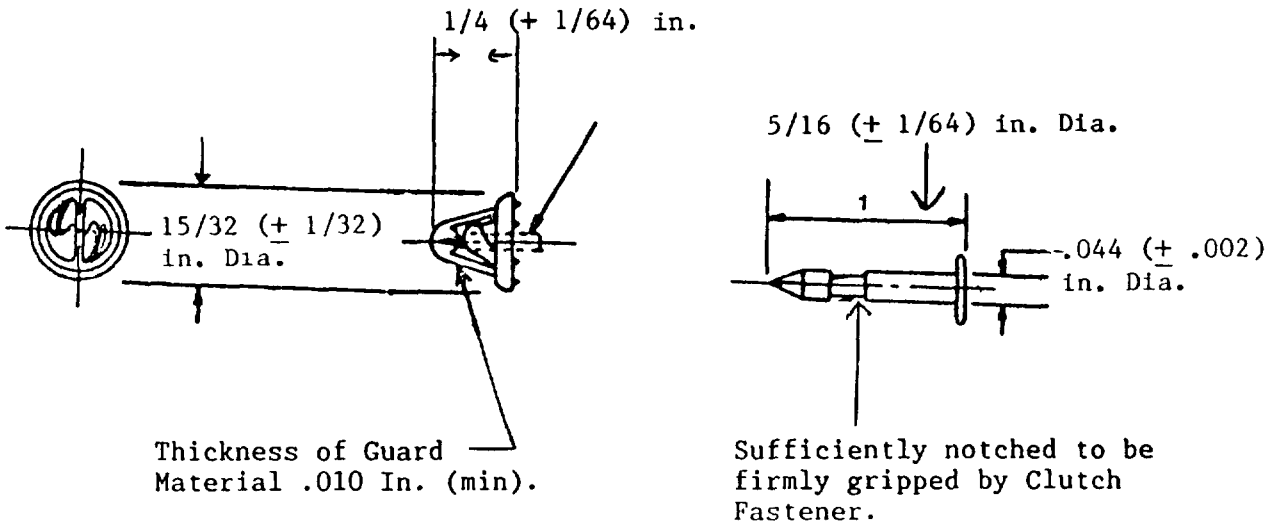

PRONG AND CLUTCH TYPE

Figure 1 - Metal Attaching Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

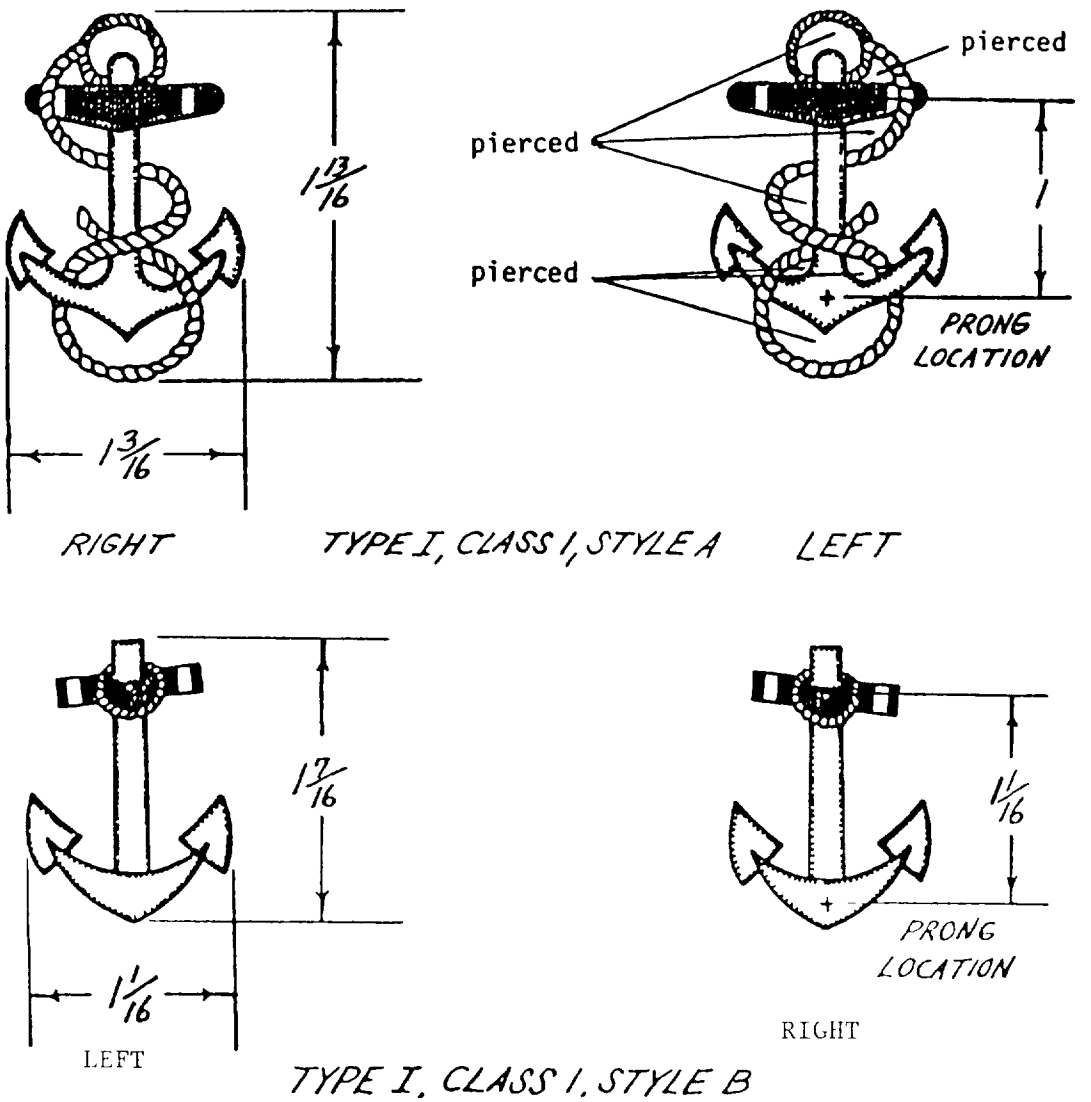


Figure 2 - Coat Collar Insignia

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

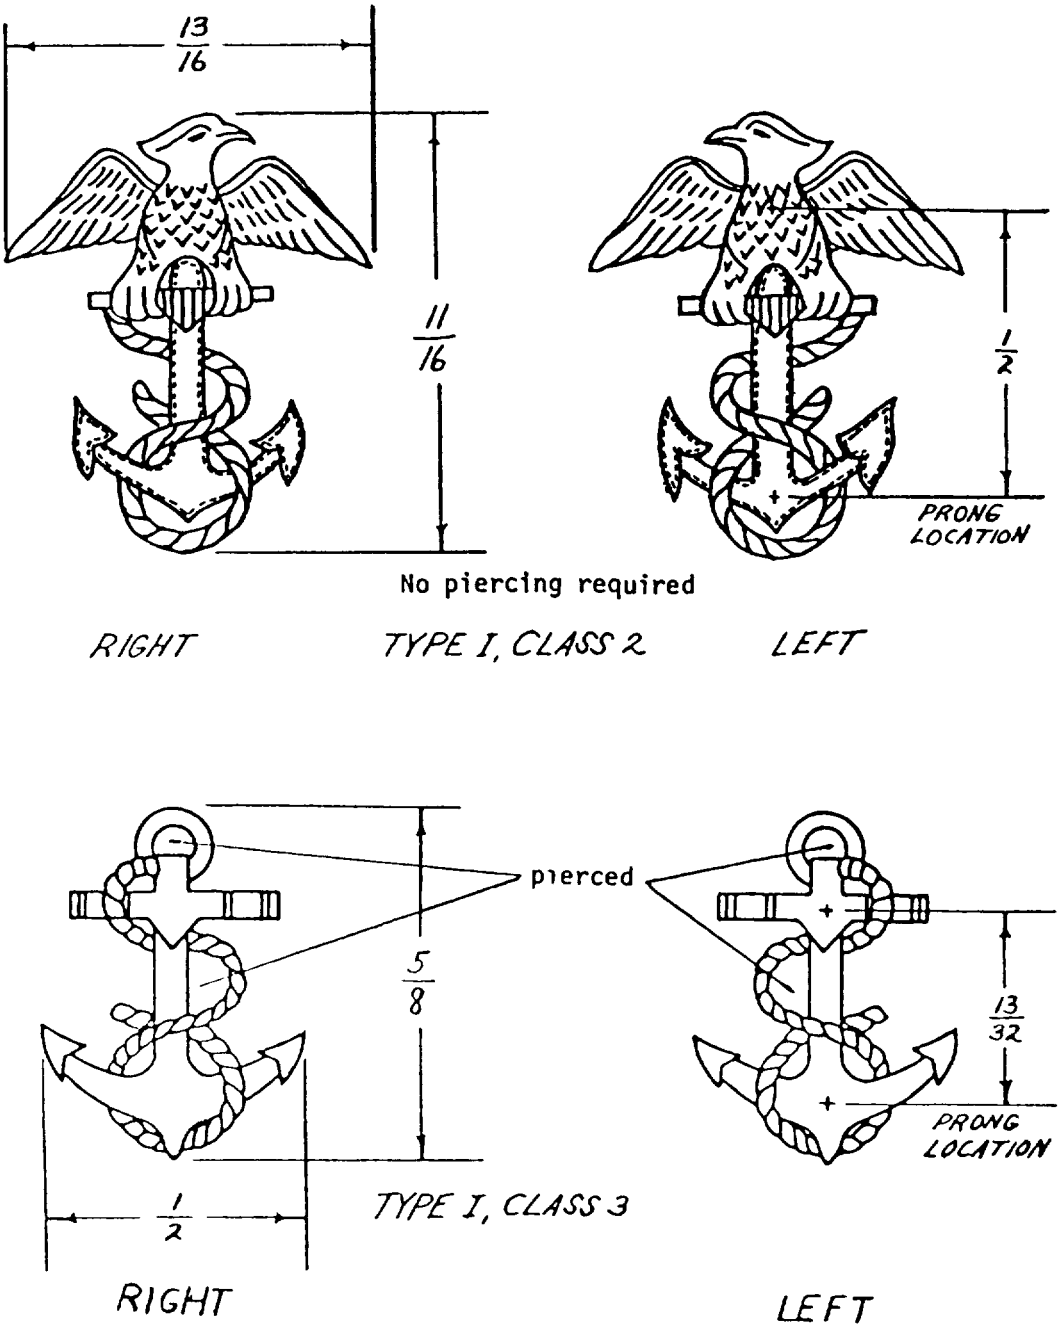


Figure 3 - Shirt Collar Insignia

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

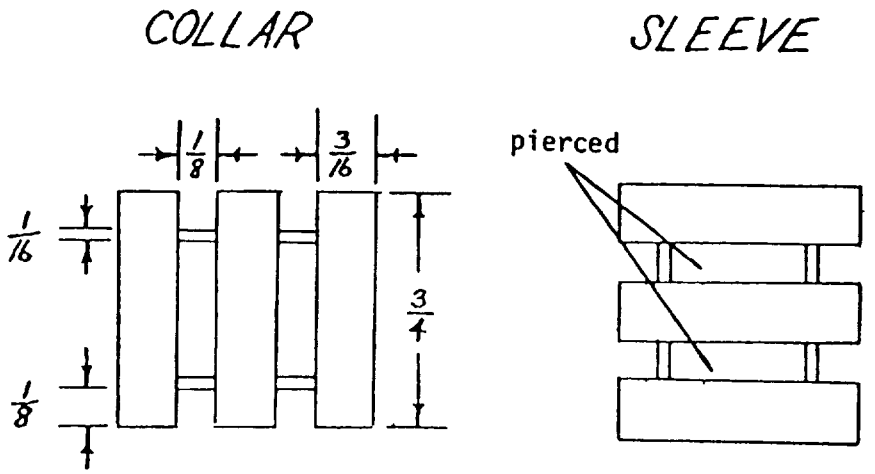


Figure 4 - Type I class, 4 Collar and Sleeve Bars

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.


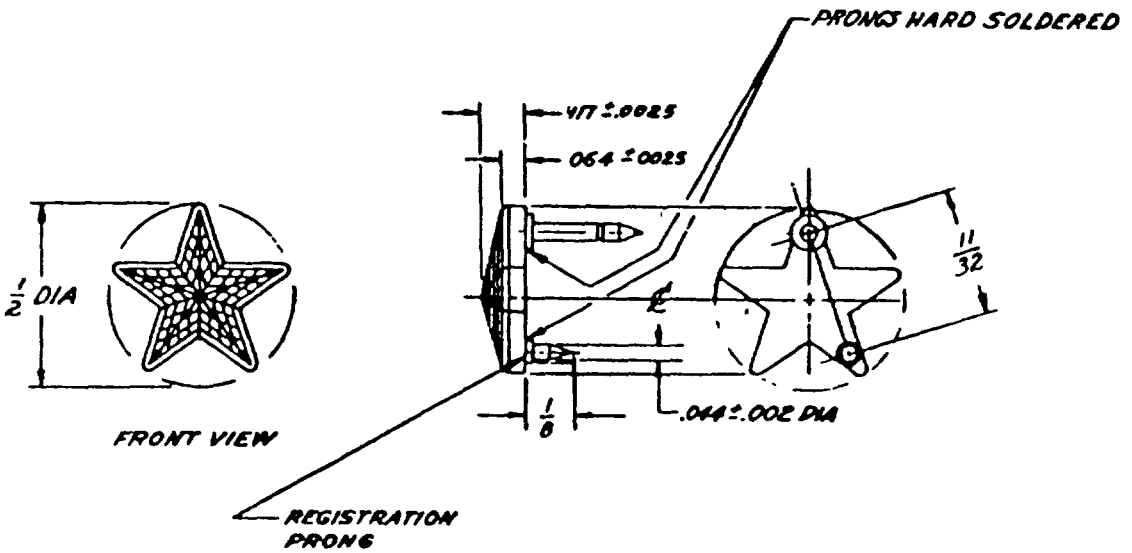


Figure 5 - Type I class 5, Collar Achievement Star


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

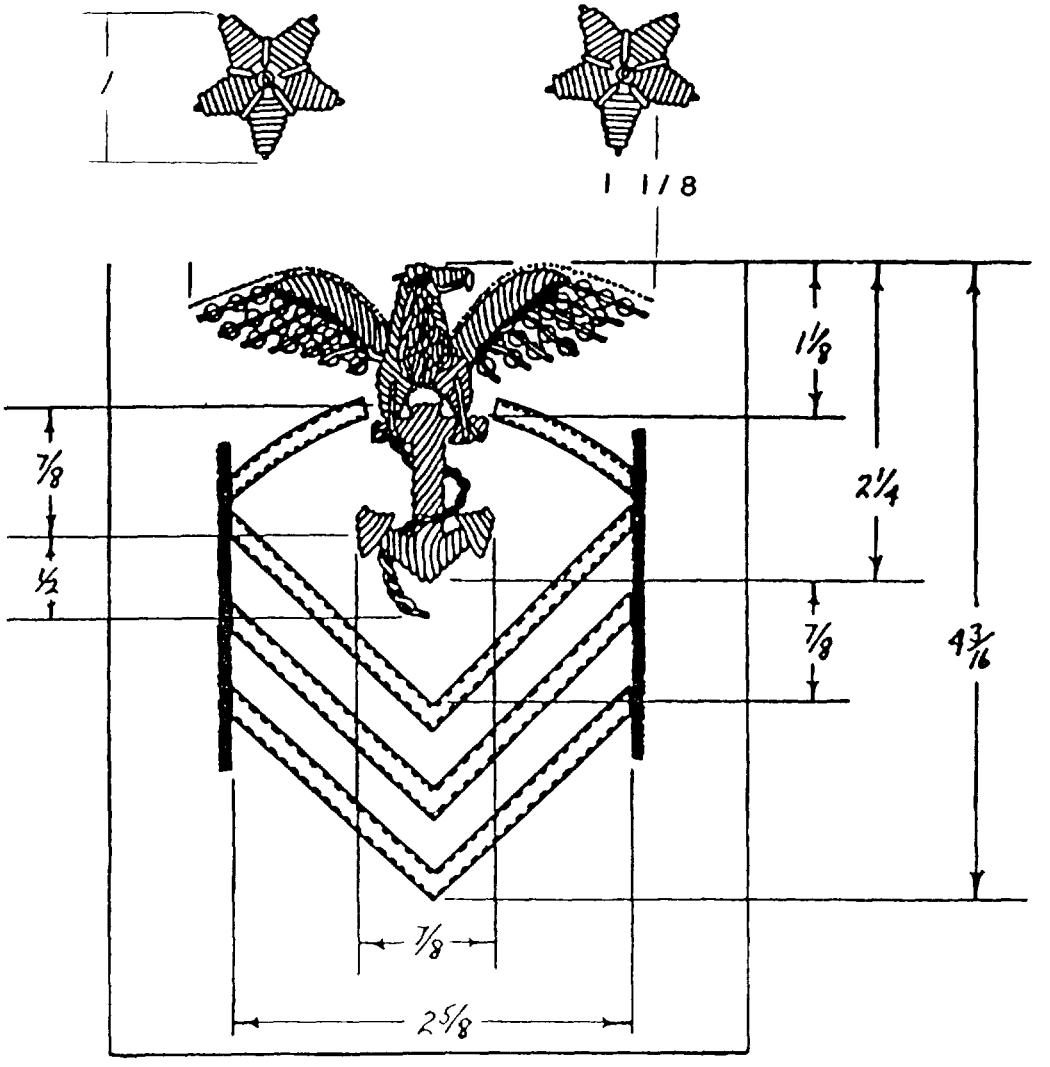

CHEVRON DATA: SET AT 90 DEGREE ANGLE WITH A 2 INCH RADIUS ARCH. SIDES 2 INCHES LONG SPACED 1/4 INCH APART.

Figure 6 - Type II, class 1 style A, Sleeve Rating Badge


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

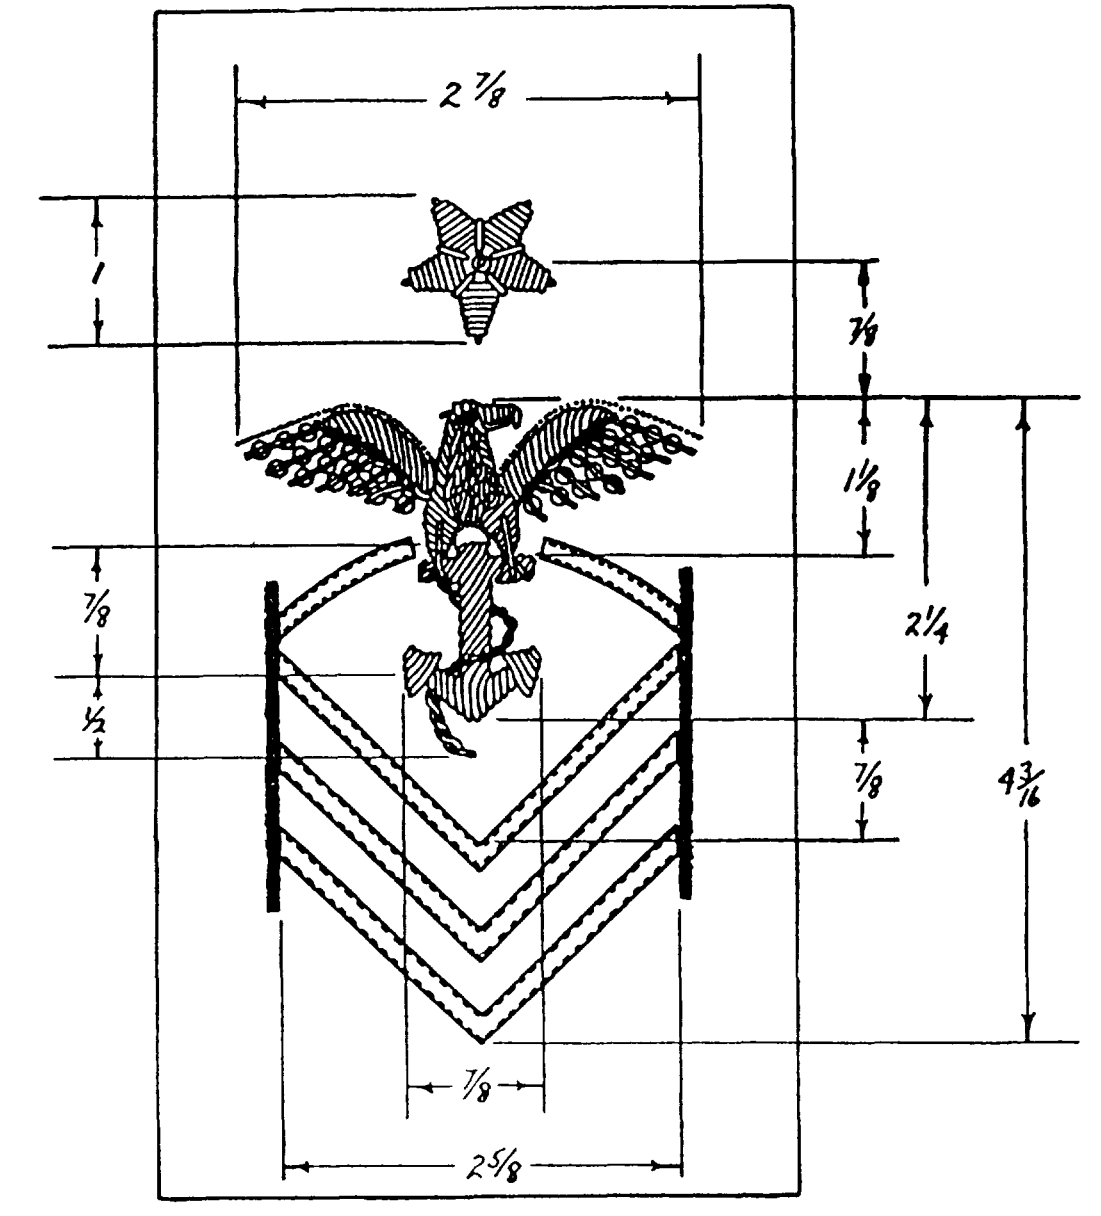

CHEVRON DATA: SET AT 90 DEGREE ANGLE WITH A 2 INCH RADIUS ARCH. SIDES 2 INCHES LONG. SPACED 1/4 INCH APART.

Figure 7 - Type II, class 1 style B, Sleeve Rating Badge


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

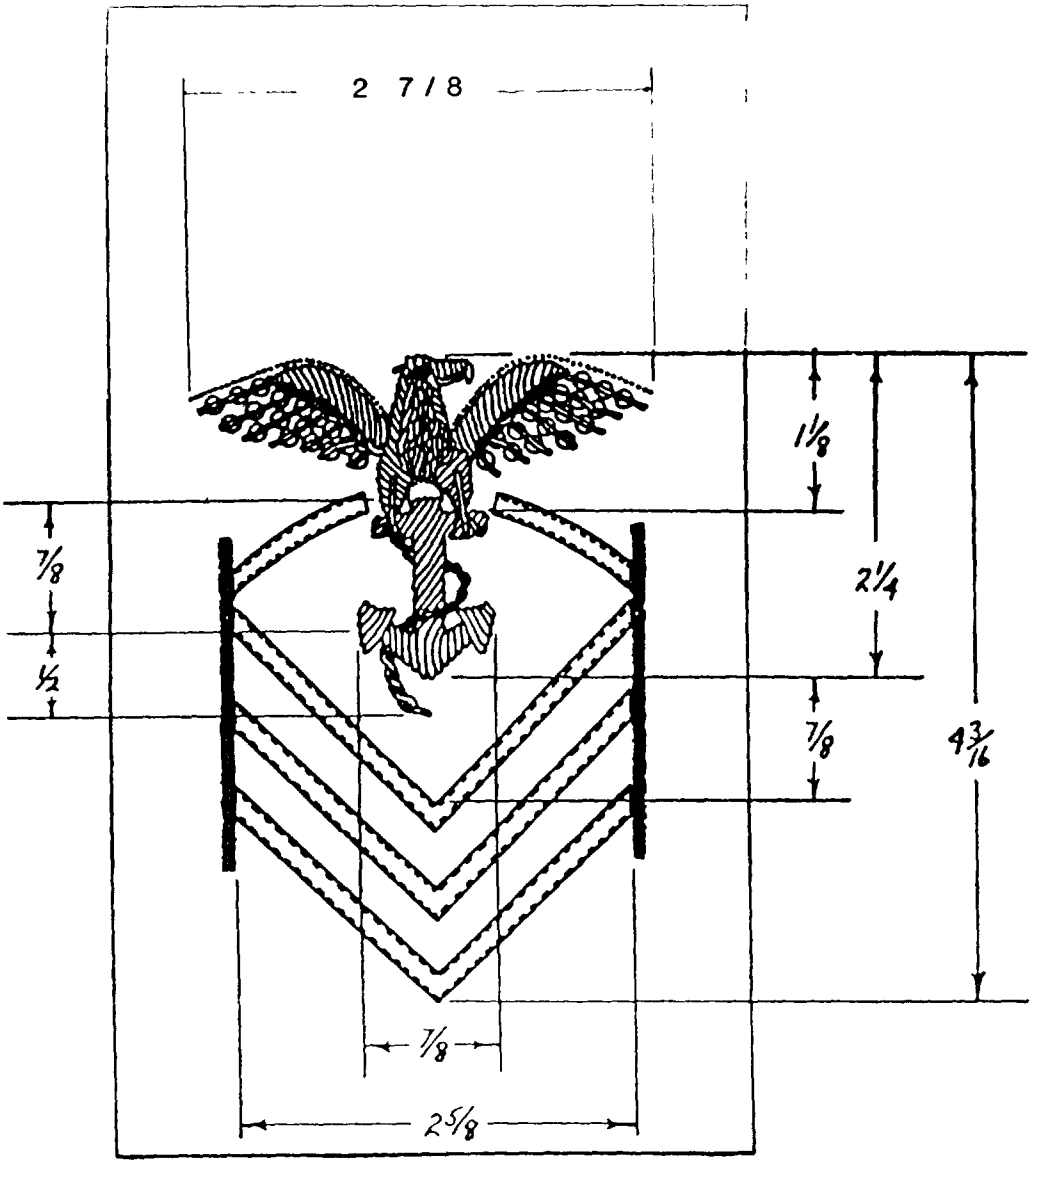

CHEVRON DATA: SET AT 90 DEGREE ANGLE WITH A 2 INCH RADIUS ARCH. SIDES 2 INCHES LONG SPACED 1/4 INCH APART.

Figure 8 - Type II, class 1 style C, Sleeve Rating Badge


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

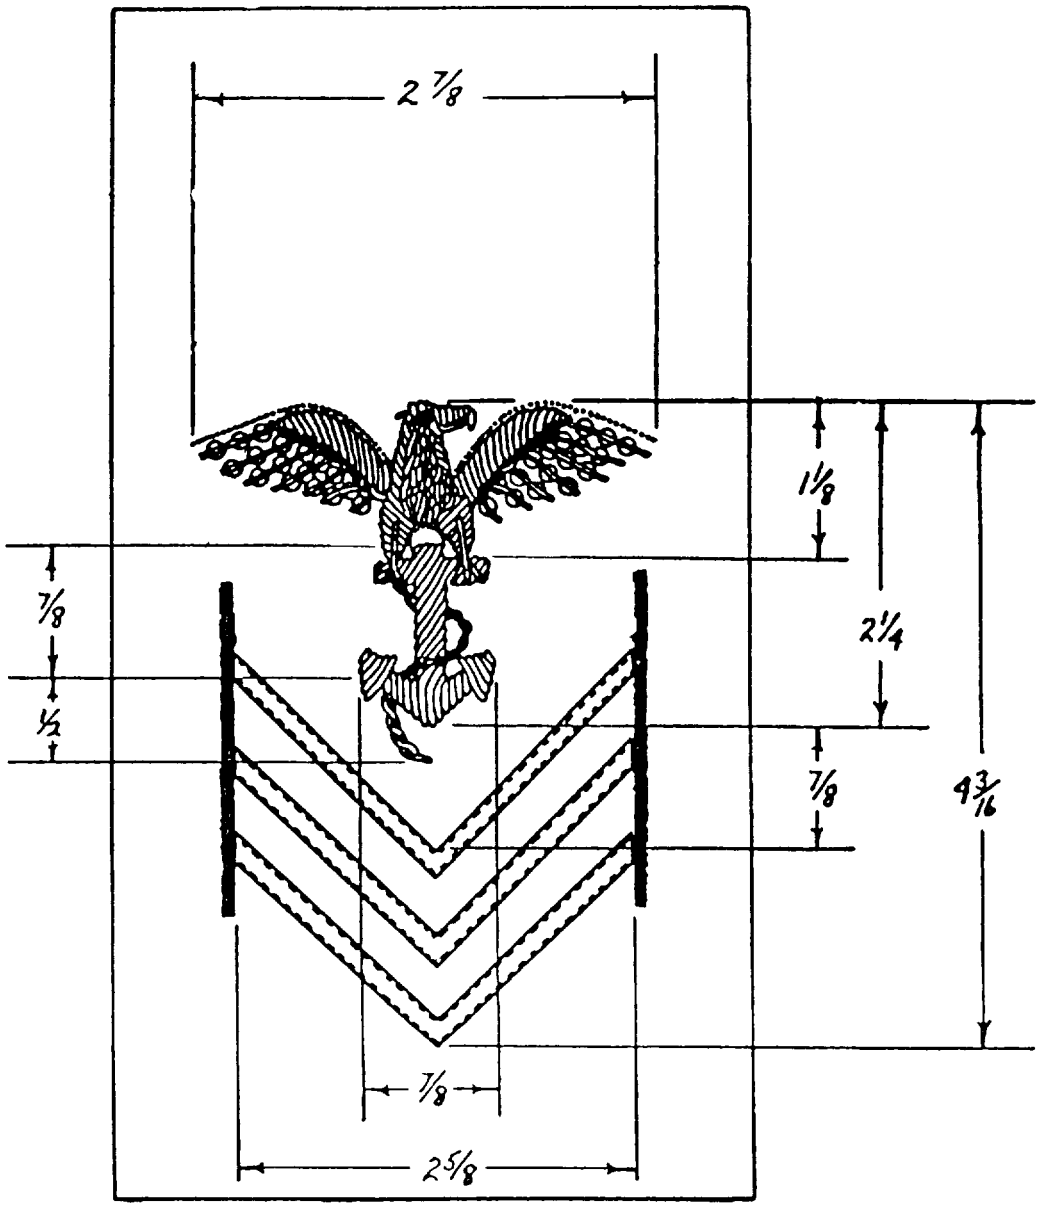

CHEVRON DATA: SET AT 90 DEGREE ANGLE WITH A 2 INCH RADIUS ARCH. SIDES 2 INCHES LONG SPACED 1/4 INCH APART.

Figure 9 - Type II, class 1 style D, Sleeve Rating Badge


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

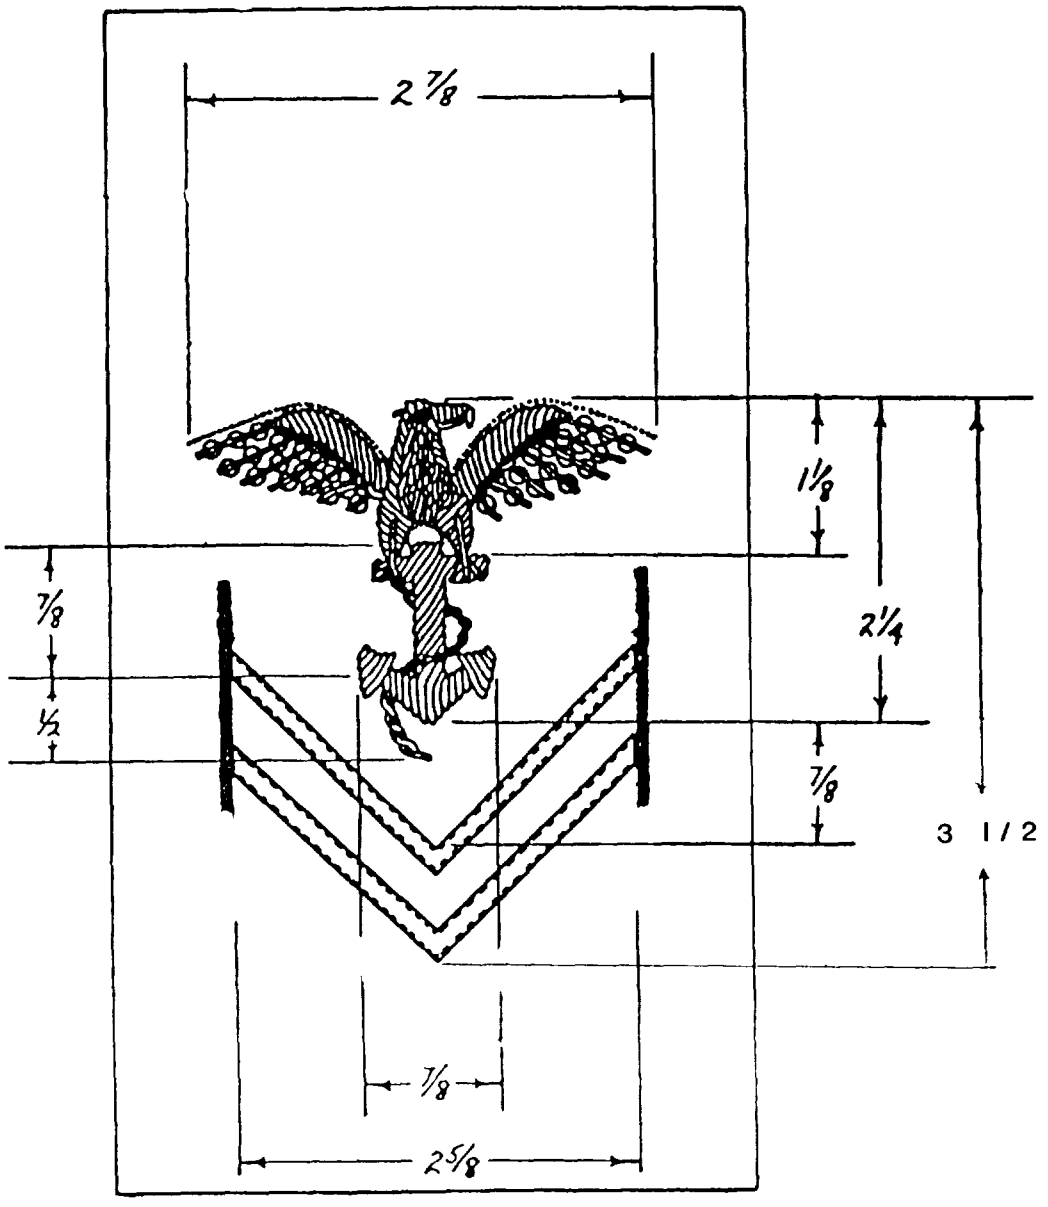

CHEVRON DATA: SET AT 90 DEGREE ANGLE WITH A 2 INCH RADIUS ARCH. SIDES 2 INCHES LONG. SPACED 1/4 INCH APART.

Figure 10 - Type II, class 1 style E, Sleeve Rating Badge

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

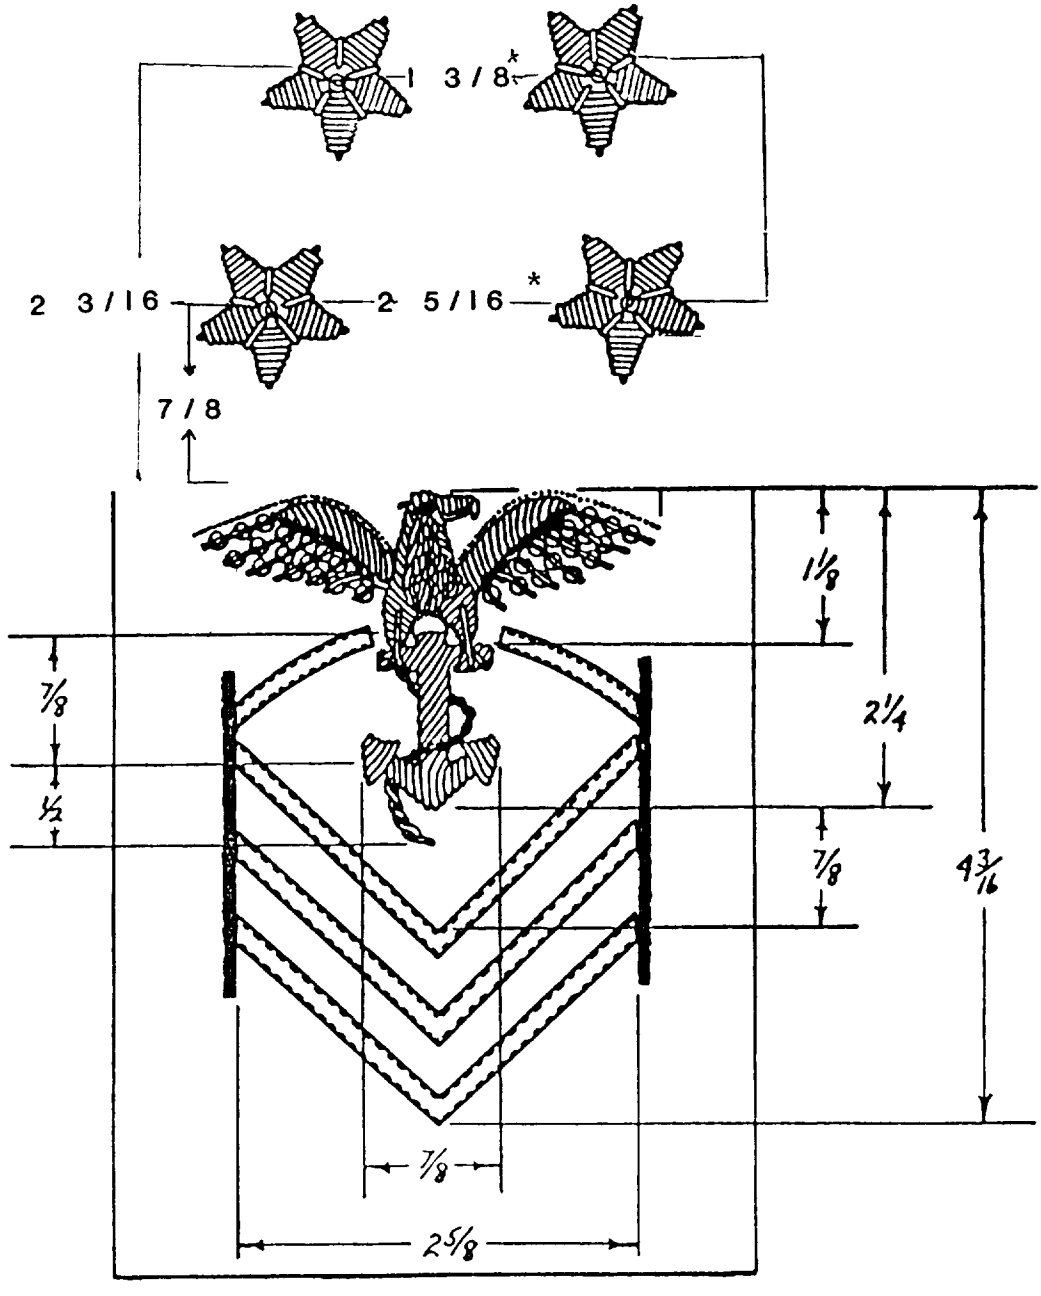


CHEVRON DATA: SET AT 90 DEGREE ANGLE WITH A 2 INCH RADIUS ARCH. SIDES 2 INCHES LONG SPACED 1/4 INCH APART.

* Denotes distance between centers of stars

Figure 11 - Type II, class 1 style F, Sleeve Rating Badge

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

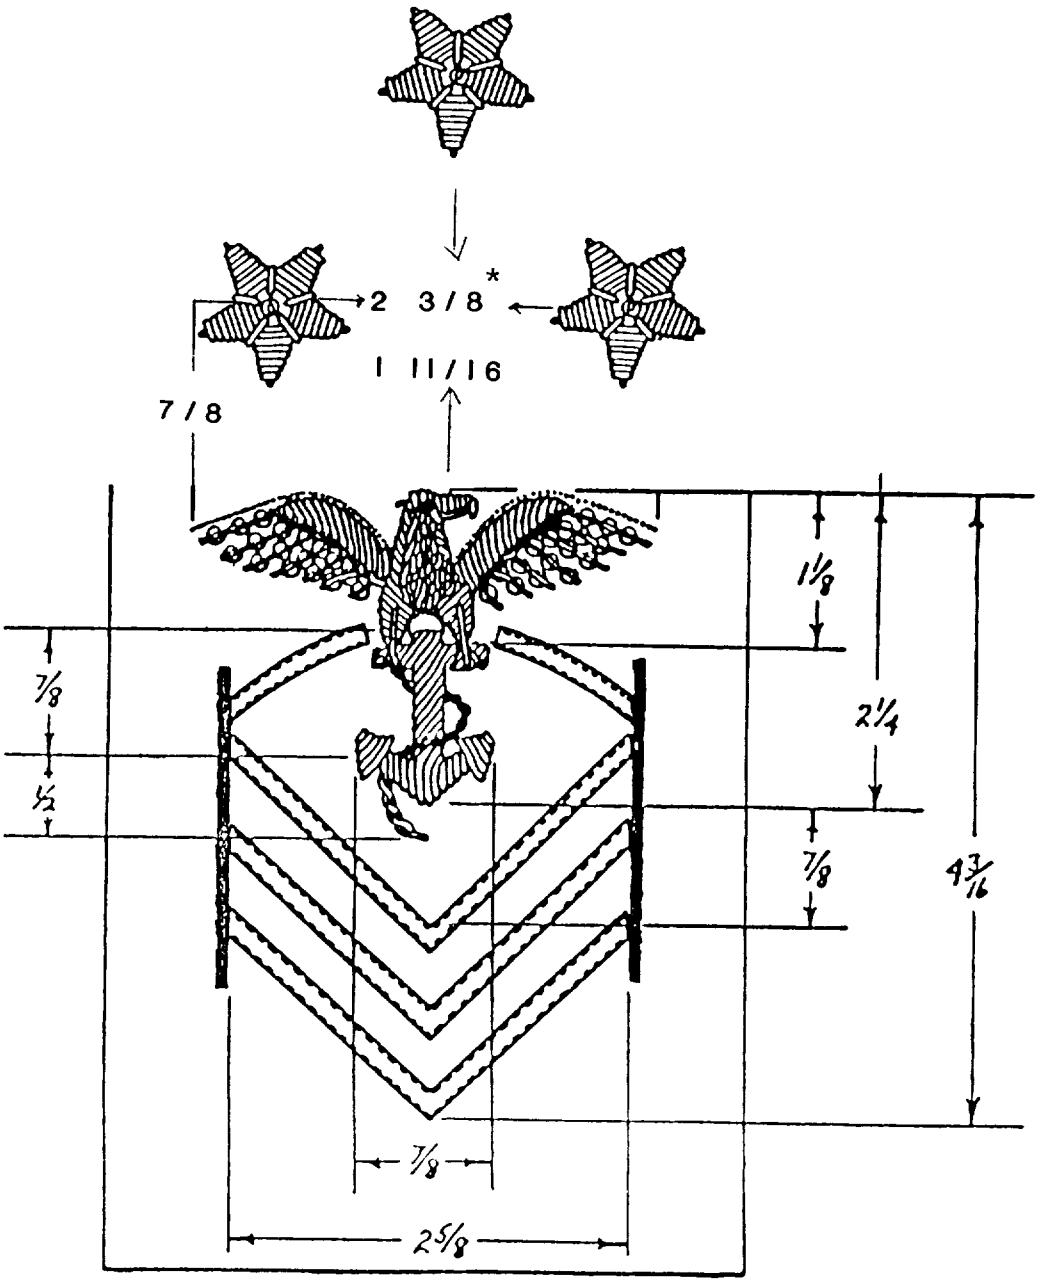


CHEVRON DATA: SET AT 90 DEGREE ANGLE WITH A 2 INCH RADIUS ARCH. SIDES 2 INCHES LONG. SPACED 1/4 INCH APART.


* Denotes distance between centers of stars

Figure 12 - Type II, class 1 style G, Sleeve Rating Badge

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

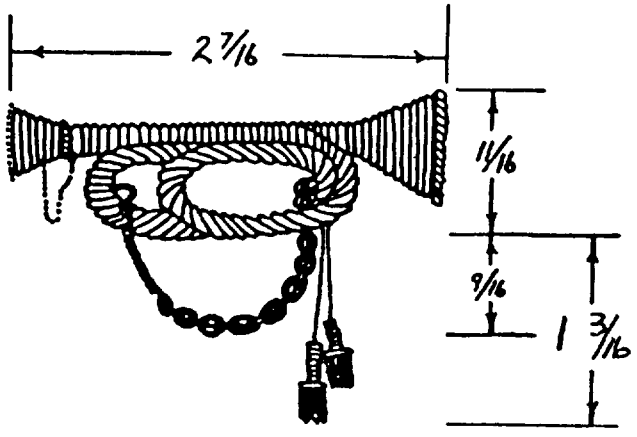

TYPE II, CLASS 2, STYLE A



TYPE II, CLASS 2, STYLE B

Figure 13 - Type II, class 2 style A, and Type II, class 2 style B, Sleeve Distinguishing Marks

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.



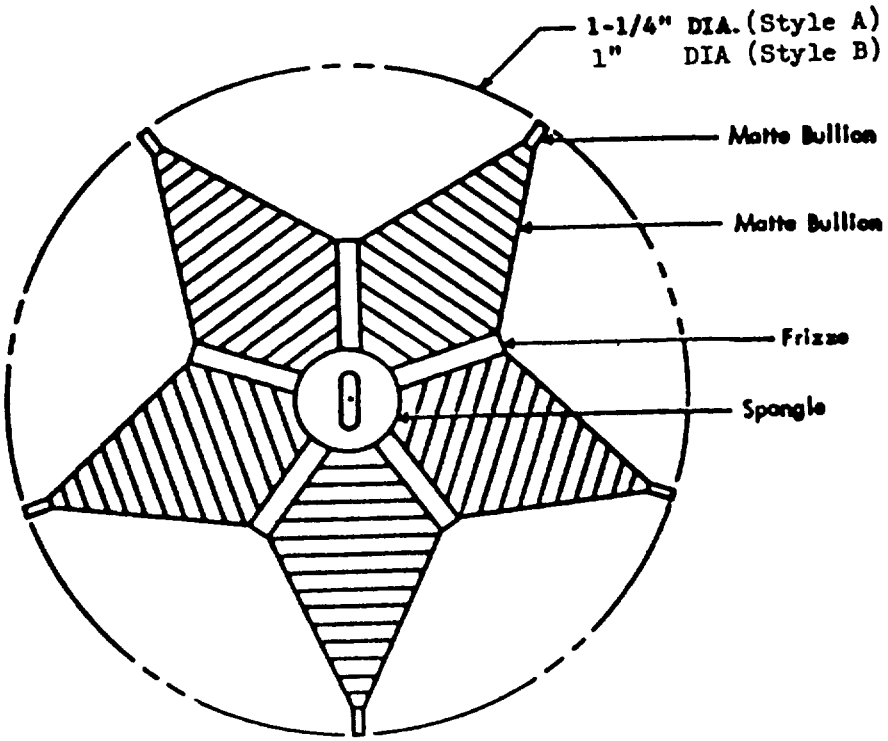


Figure 14 - Type II, class 3 style A, and Type II, class 3 style B, Sleeve Star (Rank)


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

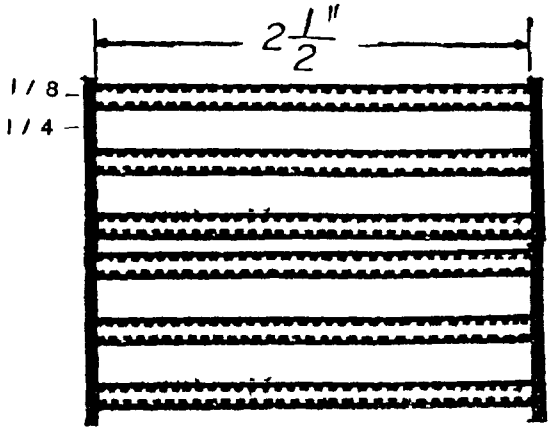


Style A

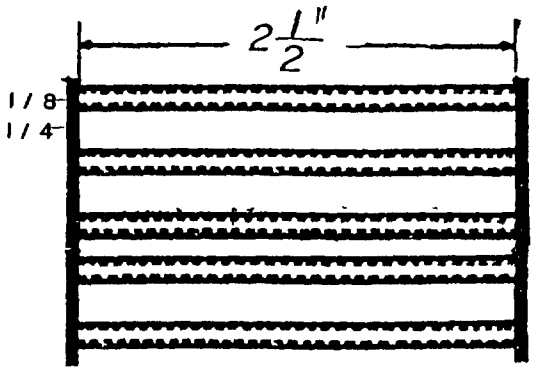


Style B

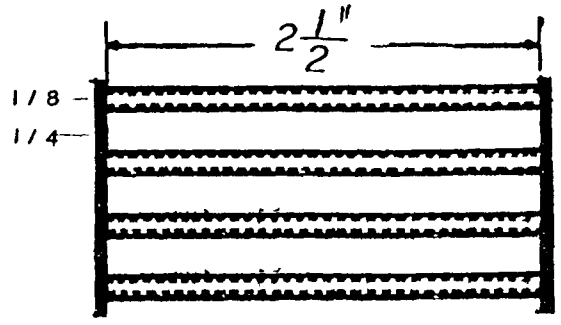


Style C

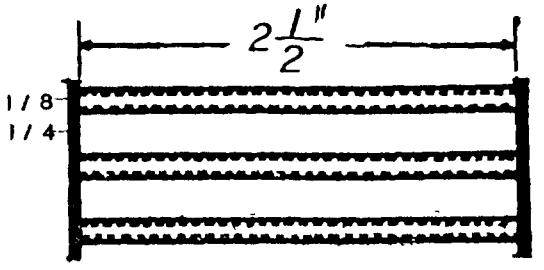

Style D

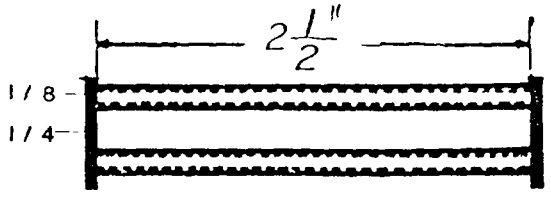


Style E




Style F

Figure 15 - Insignia, Lace (Rank and Class)
Type III, Class 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

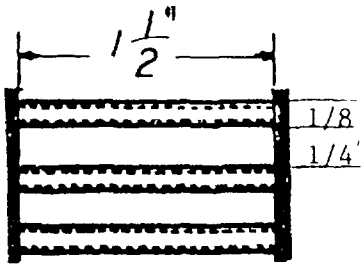

Style A

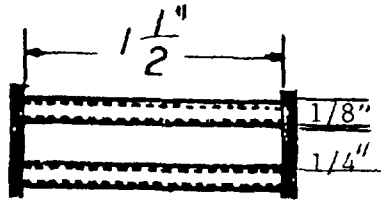

Style B



Style C

Figure 16 - Insignia, Lace (Rank and Class)
Type III, Class 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
Post Office Box 59
Attn: Code 50
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-I-21899D(NU)	INSIGNIA, BRANCH OF SERVICE (COLLAR AND SLEEVE)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2026-10-19T10:44Z
Check the source to verify that this is the current version before use.