

MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE-MOMENTARY, 2 CIRCUIT, 10 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of Specification MIL-S-8805.

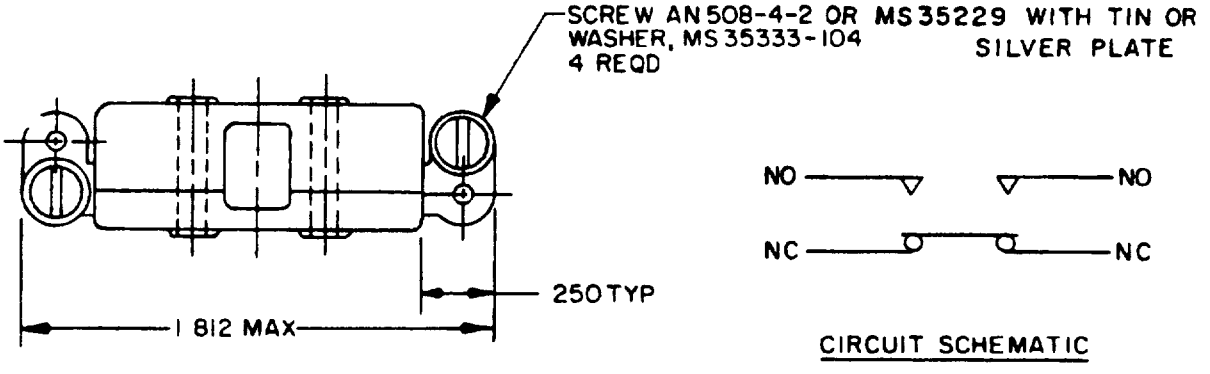

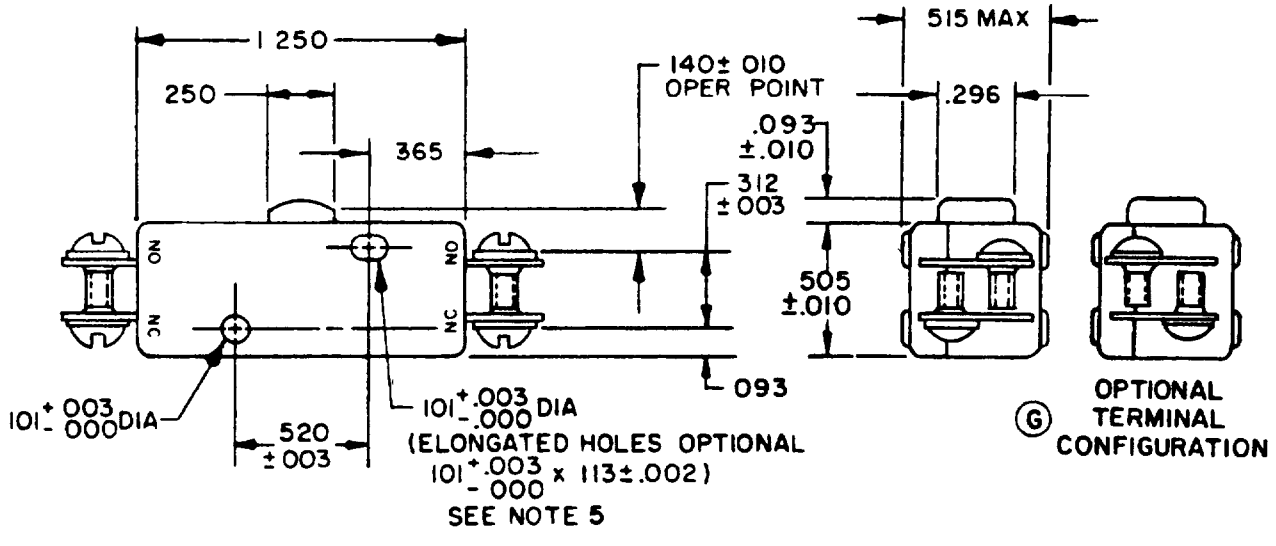


MS 25344-1

Figure 1. Configuration and dimensions.


Ⓖ denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.

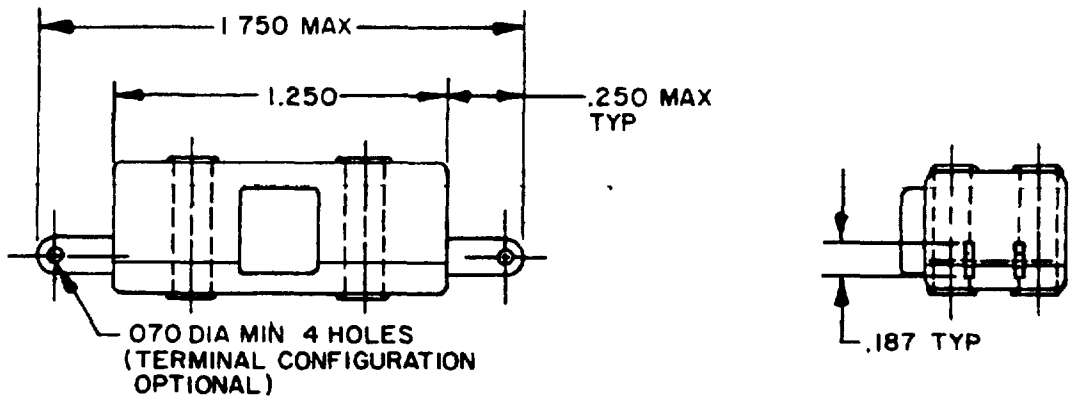

MS25342-1

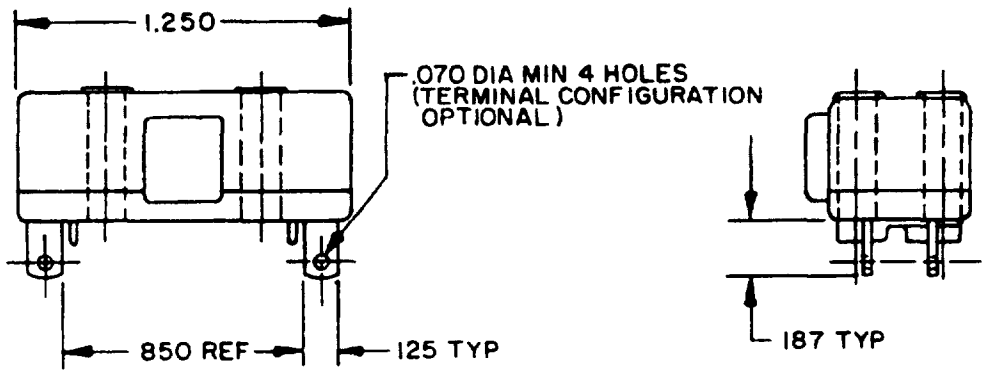

MS25343-1

INCHES	MM	INCHES	MM
.003	.08	.312	7.92
.010	.25	.365	9.27
.070	1.78	.505	12.83
.093	2.36	.515	13.08
.101	2.57	.520	13.21
.125	3.18	.850	21.59
.140	3.56	1.250	31.75
.187	4.75	1.750	44.45
.250	6.35	1.812	46.02
.296	7.52		

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Dimensions shown are case mounting holes. Cover mounting holes may exceed these dimensions.
6. Dimensions specified for MS25344-1 are applicable to MS25342-1 and MS25343-1, unless otherwise indicated.

Figure 1. Configuration and dimensions (continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction.

Dimensions and configuration. See figure 1.

Enclosure design: 1 (Unsealed).

Temperature characteristic. 1 (-55°C to +85°C).

Shock type M (100G).

Vibration grade. 1 (10 to 500 Hz).

Material

Case and cover. Flame resistant diallyl phthalate which meets the requirements of MIL-M-14.

Plunger May be glass filled nylon.

Weight .03 pound maximum.

Dielectric withstanding voltage: 1,000 Vrms. After electrical endurance, the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

Operating characteristics

Actuating force. 1.25 pounds maximum.

Movement differential .027 inch maximum.

Pretravel .060 inch maximum.

Overtravel. .015 inch minimum.

} ±20 percent variation from specified values acceptable after test.

Terminal strength 5 pounds.

Strength of actuating means. 25 pounds.

Mechanical endurance. 100,000 cycles at .015 +.001, -.000 inch overtravel.

Electrical endurance 50,000 cycles

Electrical ratings. See table I.

Qualification

Group submission. See table II.

Part number. See table III.

TABLE I. Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	10	10
Inductive	10	10
Motor	6	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification inspection.

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805	MS25344-1 (All sample units)	MS25342-1 MS25343-1 (3 sample units) Visual and mechanical examination	All

TABLE III. Part numbers and characteristics.

Part number	Terminal configuration
MS25343-1	Side solder terminal
MS25342-1	End solder terminal
MS25344-1	End screw terminal

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Navy - AS, OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - AR
Navy - MC
Air Force - 19

Agent
DLA - ES

Preparing activity
Navy - EC

(Project 5930-1164)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-S-8805/11C

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360
ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.