

MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE-MAINTAINED, 2 CIRCUIT, 10 AMPERES, UNSEALED

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

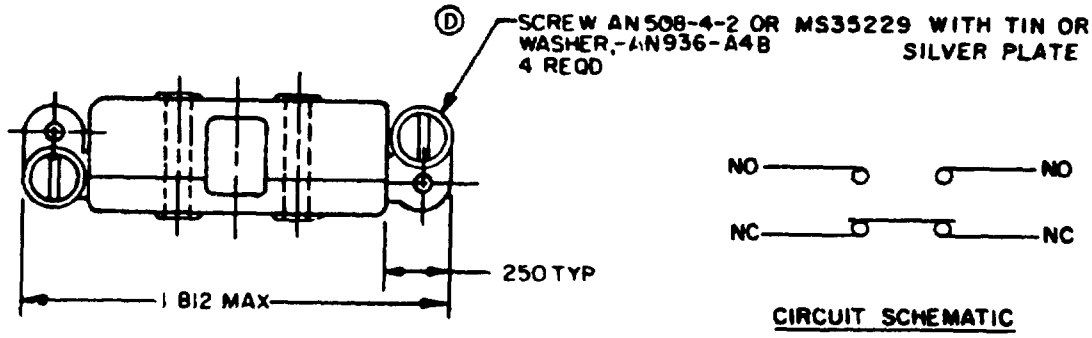

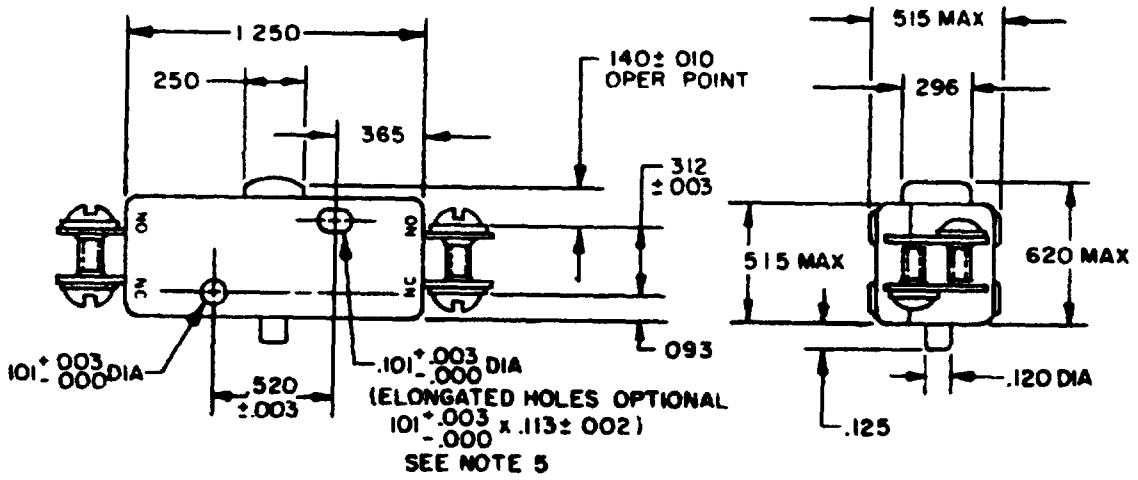


MS25347-1

Ⓓ denotes changes


Figure 1. Configuration and dimensions

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

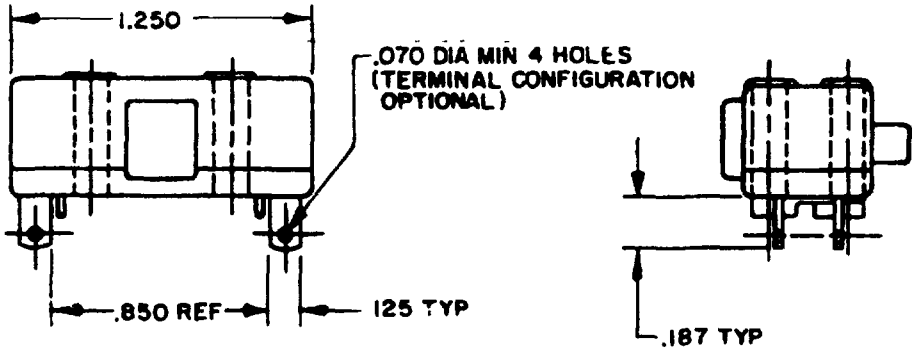

MS25346-1

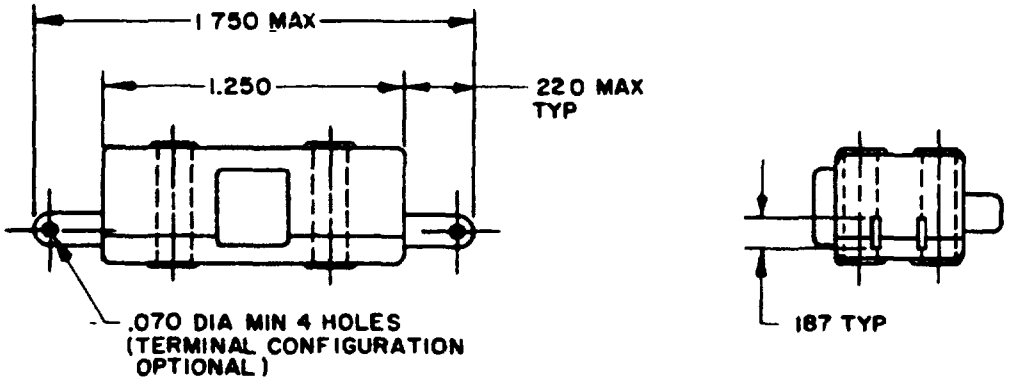

MS25345-1

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.140	3.56	.515	13.08
.010	.25	.187	4.75	.520	13.21
.070	1.78	.220	5.59	.620	15.75
.093	2.36	.250	6.35	.850	21.59
.101	2.57	.296	7.52	1.250	31.75
120	3.05	.312	7.92	1.750	44.45
.125	3.18	.365	9.27	1.812	46.02

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Dimensions shown are case mounting holes. Cover mounting holes may exceed these dimensions.

Figure 1 Configuration and dimensions (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

	Dimensions and configuration.	See figure 1
	Enclosure design:	1 (Unsealed).
	Temperature characteristic	1 (-55° to +85° C).
(D)	Shock type:	Method 213, test condition A, MIL-STD-202 (50 G).
	Vibration grade:	1 (10 to 500 Hz).
	Weight	.03 pound maximum.
(D)	Operating characteristics:	
	Actuating force:	.62 pound maximum.
	Movement differential:	.025 inch maximum.
	Pretravel:	.060 inch maximum.
	Overtravel:	.015 inch minimum.
	Reset button:	±20 percent variation from specified values acceptable after test
	Pretravel:	.060 inch maximum.
	Overtravel:	.005 inch minimum.
	Strength of push button and push button stop:	25 pounds.
	Terminal strength:	5 pounds.
(D)	Material: Case, cover, and push button:	Type SDGF in accordance with MIL-M-14. Push button may be flame retardant glass filled nylon which is self extinguishing when tested in accordance with method 2021 of FED-STD-406.
(D)	Dielectric withstanding voltage:	Sea level - 1,000 Vrms. After electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.
	Mechanical endurance:	100,000 cycles.
	Electrical endurance:	50,000 cycles.
	Electrical ratings	See table I.

TABLE I. Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	10	10
Inductive	10	10
Motor	6	6

Qualification:
Group submission: See table II.

TABLE II. Qualification inspection.

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805, groups I through VIII, inclusive	MS25347-1 (all sample units)	MS25345-1 MS25346-1 (3 sample units) Visual and mechanical examination	All

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

Part number	Terminal configuration
MS25345-1	End solder terminal
MS25346-1	End solder terminal
MS25347-1	End screw terminal

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU
Navy - SH, OS
Air Force - 17, 80
DSA - ES

User activities:
Army - MI, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-0828-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N 0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.