
MILITARY SPECIFICATION SHEET


SWITCHES, SENSITIVE-MOMENTARY, 4 CIRCUIT, 15 AMPERES, UNSEALED

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

This specification is approved for use by all Departments and Agencies of the Department of Defense.



CIRCUIT SCHEMATIC

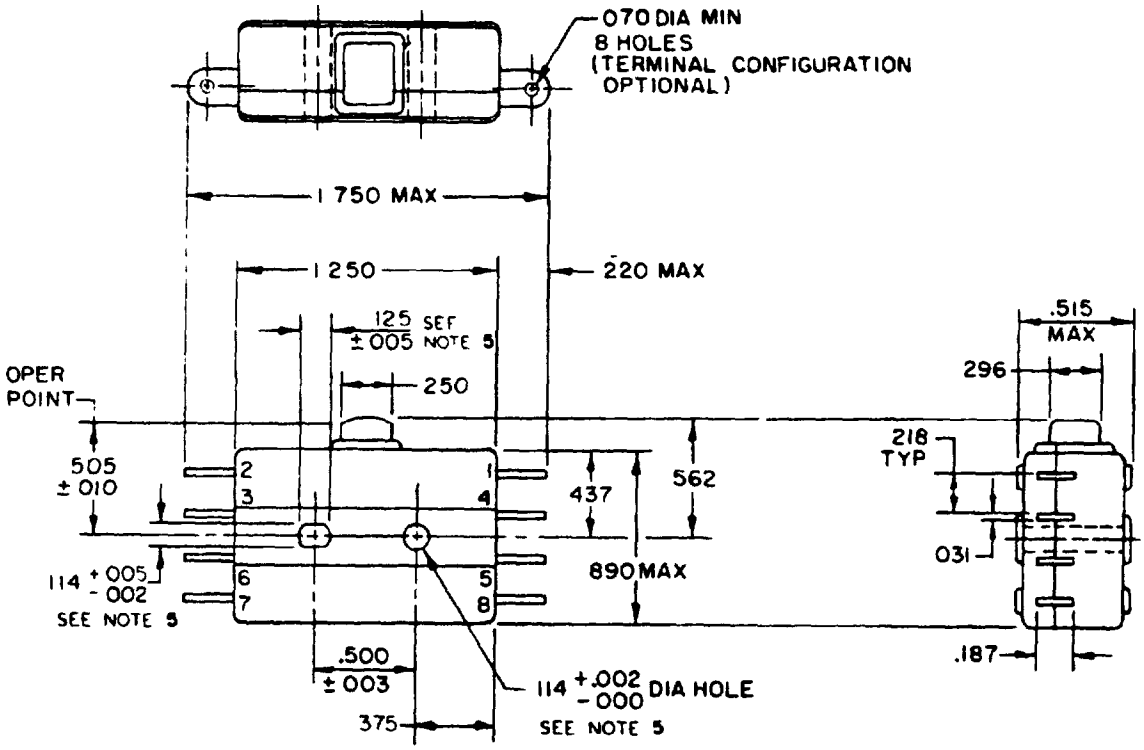


MS25348-1

Ⓔ denotes changes

FSC 5930

Figure 1 Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

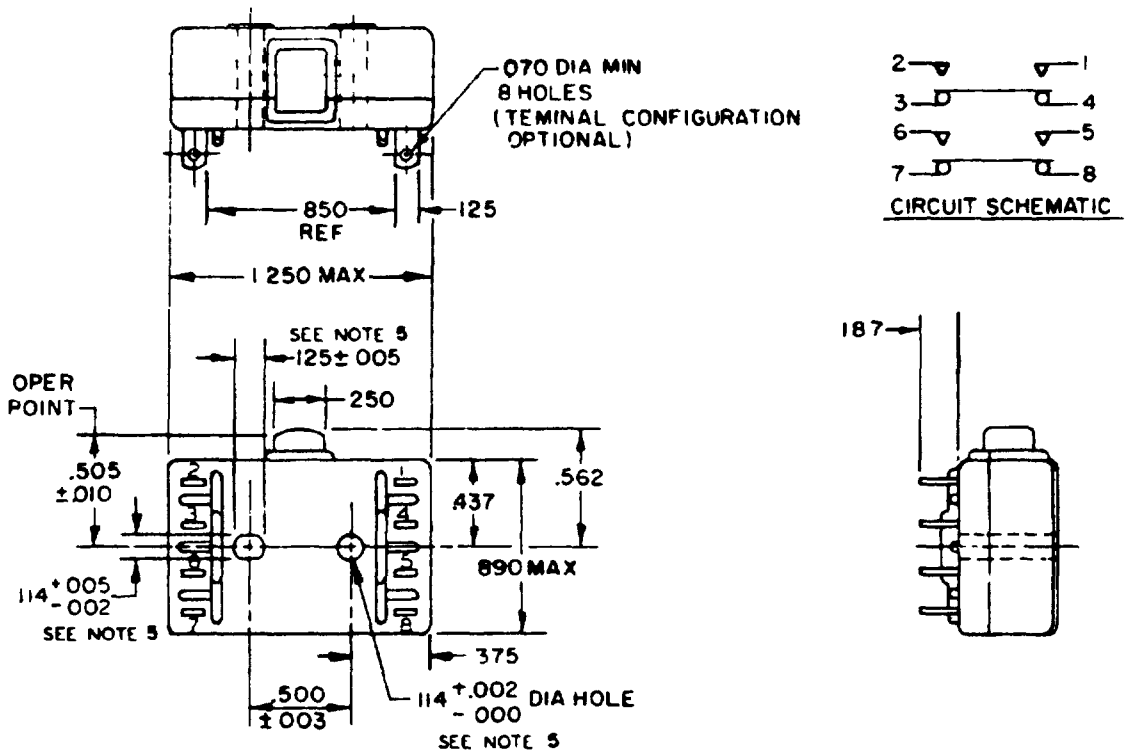

MS25349-1

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.187	4.75	.505	12.83
.003	.08	.218	5.54	.515	13.08
.005	.13	.220	5.59	.562	14.27
.010	.25	.250	6.35	.850	21.59
.031	.71	.296	7.52	.890	22.61
.070	1.78	.375	9.53	1.250	31.75
.114	2.90	.437	11.10	1.750	44.45
.125	3.18	.500	12.70		

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
5. Dimensions shown are case mounting holes. Cover mounting holes may exceed these dimensions.

Figure 1 Configuration and dimensions (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figure 1.
Enclosure design	1 (Unsealed).
Temperature characteristic·	1 (-55° to +85° C).
Shock type	M (100G).
Vibration grade.	1 (10 to 500 Hz)
Weight:	.05 pound maximum.
(E) Operating characteristics.	
Actuating force:	2.18 pounds maximum. ⎫ ±20 percent variation
Movement differential:	.035 inch maximum. ⎬ from specified values
Pretravel.	.060 inch maximum. ⎬ acceptable after test
Overtravel·	.015 inch minimum. ⎭
Strength of actuating means:	25 pounds.
Terminal strength·	5 pounds
Material:	
Case and cover	Flame resistant diallyl phthalate which meets the requirements of MIL-M-14
(E) Plunger·	Plunger may be flame retardant glass filled nylon which is self extinguishing when tested in accordance with method 2021 of FED-STD-406
Mechanical endurance·	100,000 cycles.
Electrical endurance·	50,000 cycles.
Electrical ratings·	See table I.
(E) Dielectric withstanding voltage	1,000 Vrms
	After electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

TABLE I. Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive - - - - - - -	15	15
Inductive - - - - - - -	10	15
Motor - - - - - - - - -	10	6

Qualification·
Group submission — See table II.

TABLE II Qualification inspection.

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805	MS25348-1 (all sample units)	MS25349-1 (3 sample units) Visual and mechanical examination	All

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

Part number	Terminal configuration
MS25348-1	End solder terminal
MS25349-1	Side solder terminal

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU
Navy - SH, OS
Air Force - 17, 80
DSA - ES

User activities.
Army - MI, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity.
Navy - EC

Agent:
DSA - ES

(Project 5930-0828-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS. This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N-0102-014-1807 C-28254

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Naval Electronic Systems Command
Attn: ELEX 5043
Department of the Navy
Washington, DC 23060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.