
MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE-MAINTAINED, 6 CIRCUIT, 15 AMPERES, UNSEALED

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

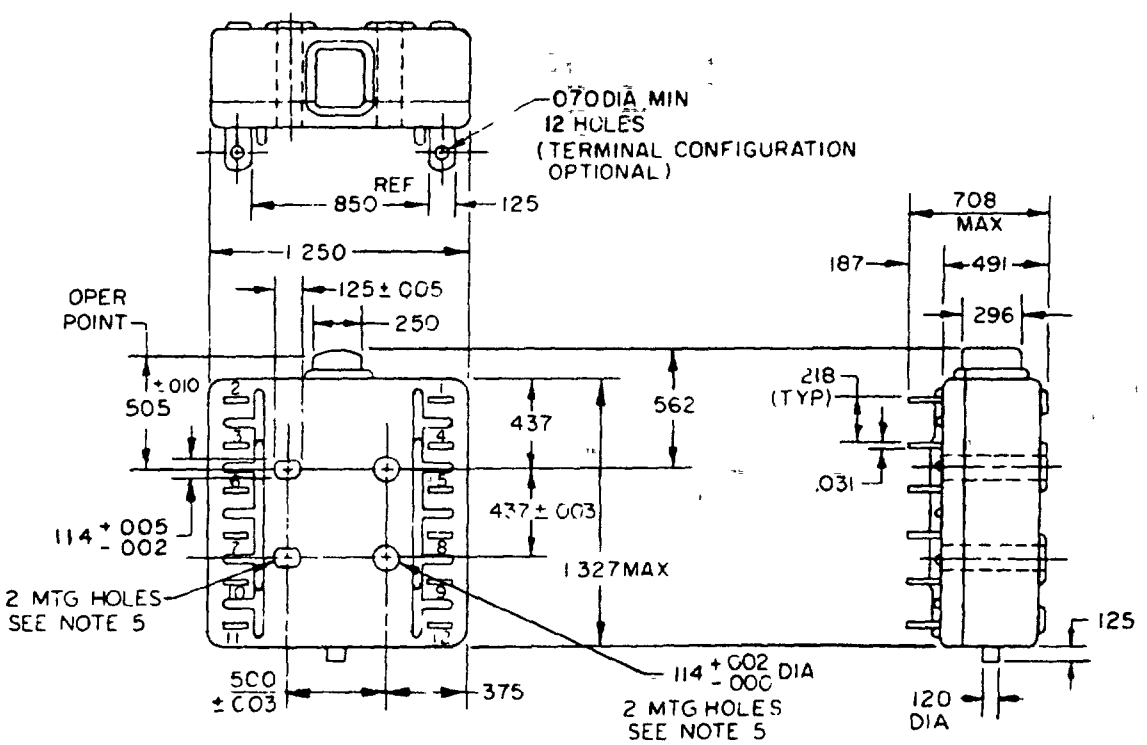


Ⓔ denotes changes

FSC 5930

Figure 1 Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.



CIRCUIT SCHEMATIC

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.125	3.18	.500	12.70
.003	.08	.187	4.75	.505	12.83
.005	.13	.218	5.54	.562	14.27
.010	.25	.250	6.35	.708	17.98
.031	.79	.296	7.52	.850	21.59
.070	1.78	.375	9.53	1.250	31.75
.114	2.90	.437	11.10	1.327	33.71
.120	3.05	.491	12.47		

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Dimensions shown are case mounting holes. Cover mounting holes may exceed these dimensions.

Figure 1 Configuration and dimensions (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration	See figure 1.
Enclosure design	1 (Unsealed).
Temperature characteristic	1 (-55° to +85° C).
(E) Shock type.	Method 213, test condition A, MIL-STD-202 (50 G).
Vibration grade	1 (10 to 500 Hz)
Weight	0.05 pound maximum
Operating characteristics:	
Actuating force	1 75 pounds maximum
Movement differential	0 036 inch maximum.
Pretravel	0 075 inch maximum
Overtravel	0.015 inch minimum
Reset button	
Pretravel	0 075 inch maximum
Overtravel	0.005 inch minimum
Strength of actuating means.	25 pounds.
Terminal strength	5 pounds.
Material	
Case and cover	Flame resistant diallyl phthalate which meets the requirements of MIL-M-14
(E) Plunger	Plunger may be flame retardant glass filled nylon which is self extinguishing when tested in accordance with method 2021 of FED-STD-406
Mechanical endurance:	100, 000 cycles at 0 015 $^{+.001}_{-.000}$ inch overtravel
Electrical endurance:	50, 000 cycles
Electrical ratings	See table I.
Dielectric withstanding voltage	1, 000 Vrms

TABLE I Electrical ratings

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	15	15
Inductive	10	15
Motor	10	6

Part number	MS25353-1

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - MU
Navy - SH, OS
Air Force - 17, 80
DSA - ES

User activities
Army - MI, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0828-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

Commander
Naval Electronic Systems Command
Attn: ELEX 5043
Department of the Navy
Washington, DC 20360

FOLD

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.