
MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE-MOMENTARY, 2 CIRCUIT, 40 AMPERES, UNSEALED

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805

This specification is approved for use by all Departments and Agencies of the Department of Defense

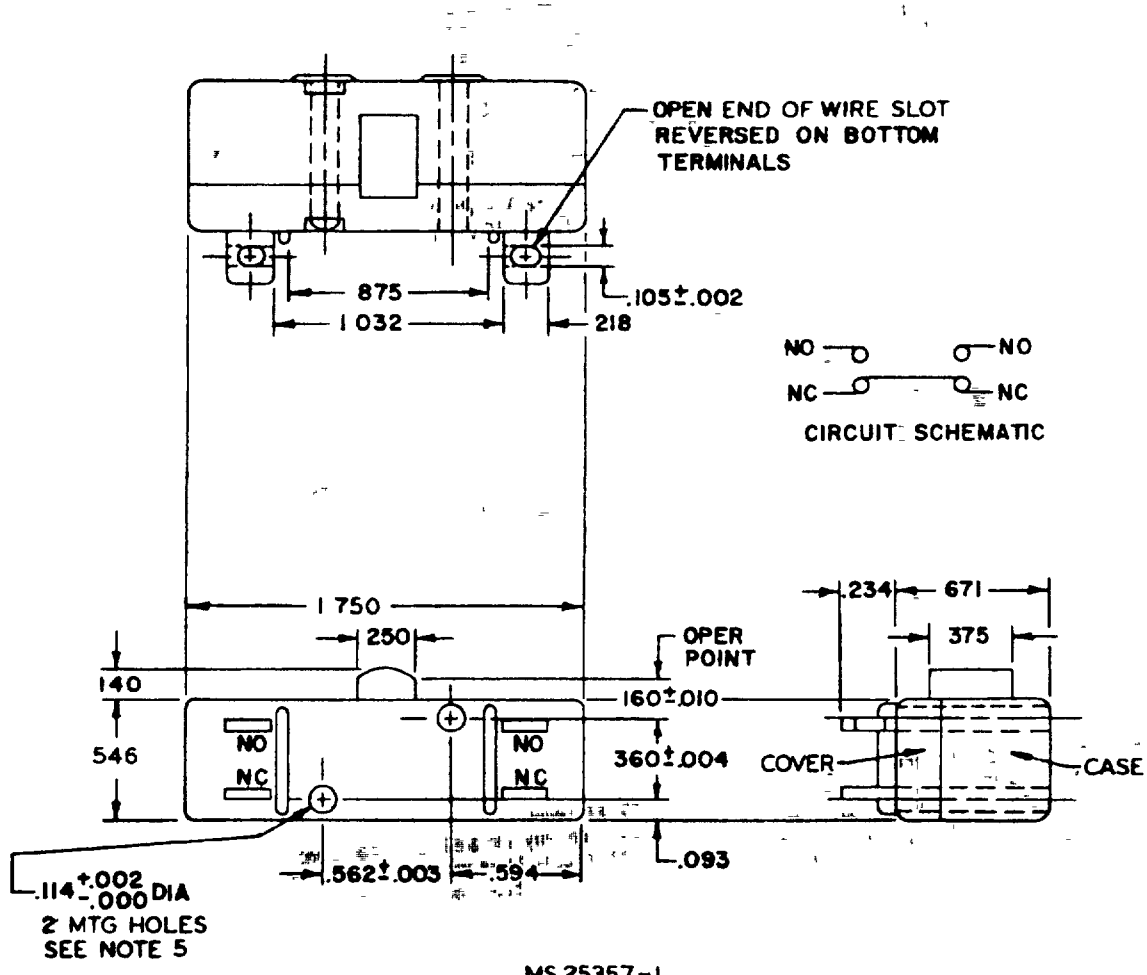


MS 25357-1

Figure 1 Configuration and dimensions

(D) denotes changes


FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:02Z
Check the source to verify that this is the current version before use.

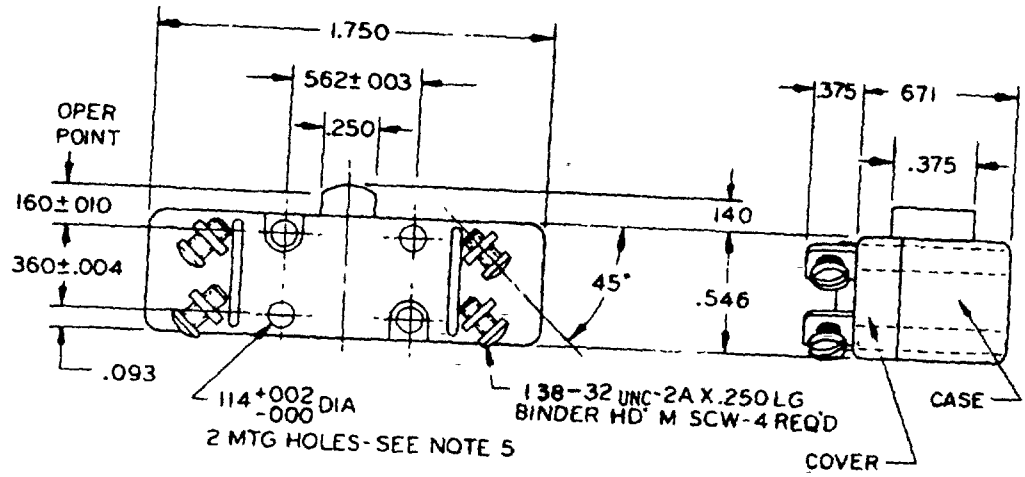

MS 25357-2

INCHES	MM	INCHES	MM
.002	.05	.250	6.35
.003	.08	.360	9.14
.004	.10	.375	9.53
.010	.25	.546	13.87
.093	2.36	.562	14.27
.105	2.67	.594	15.09
.114	2.90	.671	17.04
.140	3.56	.875	22.23
.160	4.06	1.032	26.21
.218	5.54	1.750	44.45
.234	5.94		



CIRCUIT SCHEMATIC

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Dimensions shown are case mounting holes. Cover mounting holes may exceed these by .010 (.25 mm) maximum.
6. Application note Strain relief should be provided for lead wires within 6.000 (152.40 mm) of switch terminals.

Figure 1 Configuration and dimensions (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figure 1
Enclosure design	1 (Unsealed)
Temperature characteristic	1 (-55° to +85°C)
Ⓓ Shock type.	Method 213, test condition A, MIL-STD-202 (50 G).
Vibration grade:	1 (10 to 500 Hz)
Weight:	0 06 pound maximum.
Operating characteristics	
Actuating force	3 18 pounds maximum
Movement differential:	0 065 inch maximum
Pretravel:	0 093 inch maximum
Overtravel	0 015 inch minimum
Strength of actuating means:	25 pounds
Terminal strength.	5 pounds (-1), 5 pound pull and 5 pound-inch torque (-2)
Material:	
Case and cover:	Flame resistant diallyl phthalate which meets the requirements of MIL-M-14
Ⓓ Plunger:	Plunger may be flame retardant glass filled nylon which is self extinguishing when tested in accordance with method 2021 of FED-STD-406
Mechanical endurance:	100, 000 cycles
Electrical endurance	50, 000 cycles
Electrical ratings:	See table I
Short circuit	1, 200 amperes
Dielectric withstanding voltage	1, 000 Vrms, 1, 000 Vrms between all terminals and mounting plate, and 200 Vrms between all terminals following electrical endurance
Temperature rise	Using No. 8 wire, the temperature rise measured at the switch terminals shall not exceed 50°C above the wire temperature measured a minimum of 12 inches from any connection

TABLE I Electrical ratings

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive - - - - -	40	30
Inductive - - - - -	30	20
Motor - - - - - - -	15	10

Qualification:
Group submission — See table II.

TABLE II. Qualification inspection.

Examination or test	Basic switch	Other switch samples	Extent approv.
Qualification inspection table of MIL-S-8805	MS25357-1	MS25357-2 (2 sample units) 1. Terminal strength 2 Dielectric withstanding voltage 3. Visual and mechanical examination	All

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:02Z
Check the source to verify that this is the current version before use.

Part number	Terminal style
MS25357-1	Solder
MS25357-2	Screw

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - MU
Navy - SH, OS
Air Force - 17, 80
DSA - ES

User activities
Army - MI, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0828-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N-0102-014-1801 C-28204

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:02Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:02Z
Check the source to verify that this is the current version before use.