INCH POUND


MIL-S-8805/7E
18 September 1990
SUPERSEDING
MIL-S-8805/7D
30 September 1988

MILITARY SPECIFICATION SHEET


SWITCHES, SENSITIVE, MOMENTARY, 2 CIRCUIT OR SPST (10 AMPERES), UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.


(E) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.

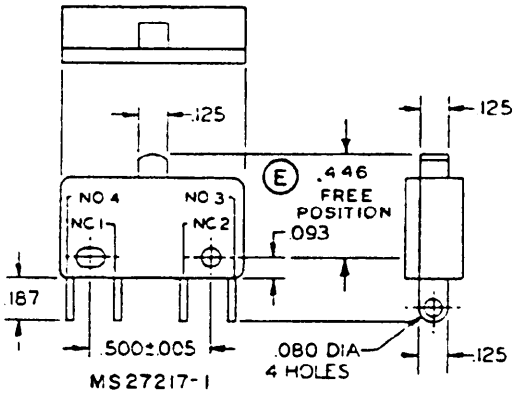


MS 27217-1

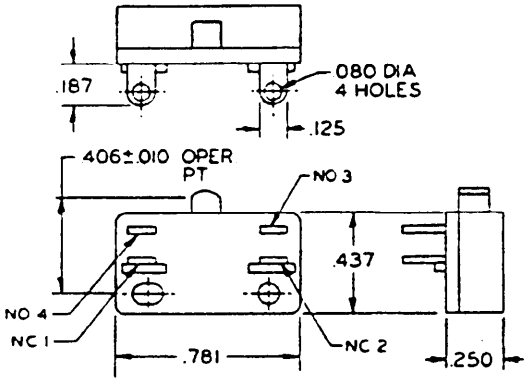

MS 27217-2

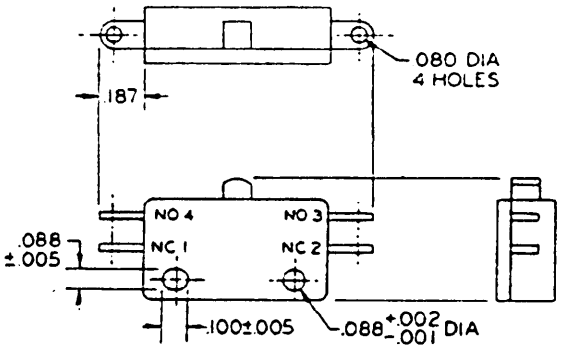

MS 25476-1



CIRCUIT SCHEMATIC

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.088	2.24	.250	6.35
.002	0.05	.093	2.36	.406	10.31
.005	0.13	.100	2.54	.437	11.10
.010	0.25	.125	3.18	.446	11.33
.080	2.03	.187	4.75	.500	12.70
				.781	19.84

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
4. Exact shape of switch optional provided dimensions specified are not exceeded.

FIGURE 1. Dimensions and configurations.

(E) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Enclosure design: 1 (unsealed).

Temperature characteristic: 2 (-65°C to +125°C).

Shock type: M (100 g, test condition I, method 213 of MIL-STD-202).

Vibration grade: 2 (10 to 2,000 Hz swept sinusoidal, 15 g peak).

Weight: .10 ounce maximum.

Operating characteristics:

Free position	.446 inch.	
Actuating force	8 ounces maximum.	±20 percent variation from specified values specified after test.
Overtravel	.012 inch minimum.	
Movement differential	.020 ±.005 inch.	
Operating point	.406 ±.010 inch.	

Strength of actuator: 25 pounds.

Terminal strength: 5 pounds when applied perpendicular to the longitudinal axis of the terminals; 9 pounds when applied in other directions.

Material:

Case and cover: Type SDG-F in accordance with MIL-M-14.

Button: Type SDG-F in accordance with MIL-M-14 or type GPT-30F in accordance with MIL-M-24519.

Dielectric withstanding voltage:

Sea level: 1,000 V rms between all terminals and ground.

Altitude: 400 V rms.

Mechanical endurance: 1,000,000 cycles at .016 ±.001 inch overtravel.

Electrical endurance: 100,000 cycles.

Electrical ratings: See table I.

(E) Part or Identifying Number (PIN): See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Load	Sea level		70,000 feet
	28 V dc	115 V ac, 60 Hz	28 V dc
NO or NC	Amperes	Amperes	Amperes
Resistive	10	7.5	10
Inductive	7.5	5	3.5
Lamp	4	3	---
2 circuit			
Resistive	10	5	10
Inductive	5	5	2
Lamp	3	1.5	---

QUALIFICATION:

Group submission: See table III.

Ⓔ TABLE II. PIN and terminal configurations.

PIN	Terminal configuration
MS27217-1	Bottom solder type
MS27217-2	Side solder type
MS25476-1	End solder type

TABLE III. Group submission.

Ⓔ PIN	Examination or test	Extent of approval
MS27217-1 (all sample units)	Qualification inspection table of MIL-S-8805	All
MS27217-2 MS25476-1 (4 sample units)	Terminal strength Dielectric withstanding voltage Visual and mechanical examination	

Source: https://assist.dla.mil -- Downloaded: 20260-17T11:00Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV
Navy - AS, OS, SH
Air Force - 99

User activities:
Army - AR
Navy - MC
Air Force - 19
NASA - NA

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1440-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:00Z
Check the source to verify that this is the current version before use.