
MIL-S-8805/16E
11 July 1972
SUPERSEDING
MIL-S-8805/16D
29 June 1970

MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE-MAINTAINED, 4 CIRCUIT, 15 AMPERES, UNSEALED

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

This specification is approved for use by all Departments and Agencies of the Department of Defense

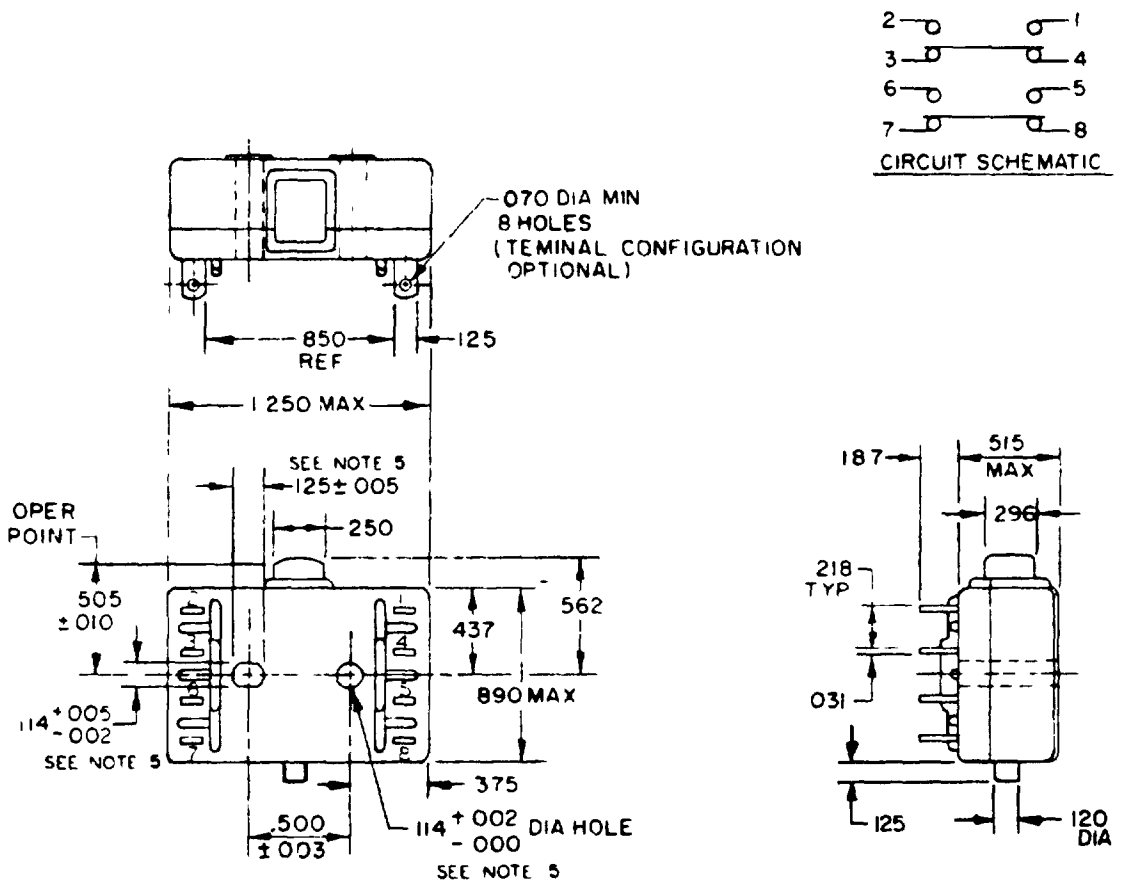

(E) denotes changes

Figure 1 Configuration and dimensions

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.114	2.90	.296	7.52	.562	14.27
.003	.08	.120	3.05	.375	9.53	.850	21.59
.005	.13	.125	3.18	.437	11.10	.890	22.61
.010	.25	.187	4.75	.500	12.70	1.250	31.75
.031	.79	.218	5.54	.505	12.83		
.070	1.78	.250	6.35	.515	13.08		

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Dimensions shown are case mounting holes. Cover mounting holes may exceed these dimensions.

Figure 1 Configuration and dimensions (continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

	Dimensions and configuration·	See figure 1.
	Enclosure design.	1 (Unsealed).
	Temperature characteristic	1 (-55° to +85° C).
(E)	Shock type:	Method 213, test condition A, MIL-STD-202 (50 G).
	Vibration grade·	1 (10 to 500 Hz).
	Weight·	0.05 pound maximum.
(E)	Operating characteristics:	
	Actuating force	1.25 pounds maximum.
	Movement differential	0.035 inch maximum.
	Pretravel	0.060 inch maximum ±20 percent variation
	Overtravel	0.015 inch minimum. from specified values
	Reset button.	
	Pretravel	0.060 inch maximum.
	Overtravel.	0.005 inch minimum
	Strength of actuating means	25 pounds
	Terminal strength.	5 pounds.
	Material	
	Case and cover·	Flame resistant diallyl phthalate which meets the requirements of MIL-M-14
(E)	Plunger·	Plunger may be flame retardant glass filled nylon which is self extinguishing when tested in accordance with method 2021 of FED-STD-406.
(E)	Dielectric withstanding voltage·	Sea level - 1,000 Vrms. After electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.
	Mechanical endurance	100,000 cycles at 0.015 $^{+.001}_{-.000}$ inch overtravel.
	Electrical endurance	50,000 cycles.
	Electrical ratings	See table I.

TABLE I. Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	15	15
Inductive	10	15
Motor	10	6

Part number·	MS25351-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - MU
Navy - SH, OS
Air Force - 17, 80
DSA - ES

User activities
Army - MI, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent
DSA - ES

(Project 5930-0828-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:01Z
Check the source to verify that this is the current version before use.