
MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE, 4 CIRCUIT, 15 AMPERES, UNSEALED

LATCHING UNIT-MANUAL RESET

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

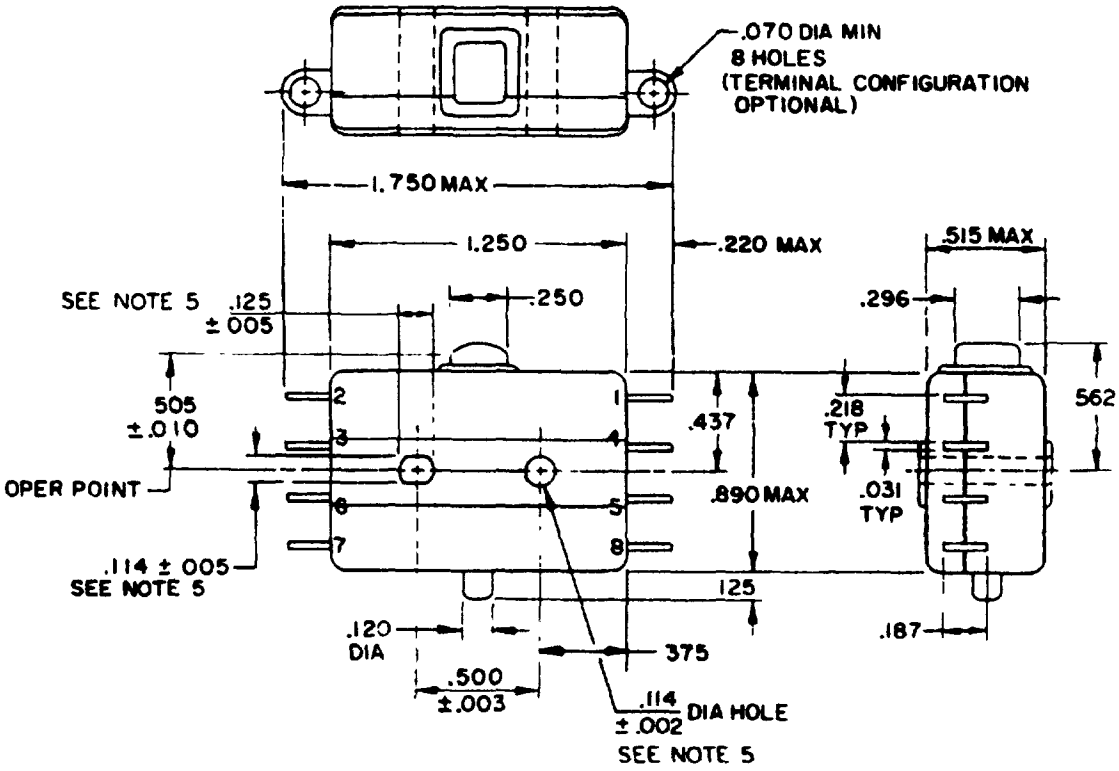

CIRCUIT SCHEMATIC

(D) denotes changes

Figure 1. Configuration and dimensions

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:59Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.125	3.18	.500	12.70
.003	.08	.187	4.75	.505	12.83
.005	.13	.218	5.54	.515	13.08
.010	.25	.220	5.59	.562	14.27
.031	.79	.250	6.35	.890	22.61
.070	1.78	.296	7.52	1.250	31.75
.114	2.90	.375	9.53	1.750	44.45
.120	3.05	.437	11.10		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. Dimensions shown are case mounting holes. Cover mounting holes may exceed these dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

	Dimensions and configuration·	See figure 1
	Enclosure design	1 (Unsealed).
	Temperature characteristics.	1 (-55° to +85° C).
(D)	Shock type:	Method 213, test condition A, MIL-STD-202 (50 G).
	Vibration grade:	1 (10 to 500 Hz).
	Weight:	.04 pound maximum.
(D)	Operating characteristics	
	Actuating force.	1.25 pounds maximum.
	Movement differential:	.035 inch maximum.
	Pretravel	.060 inch maximum.
	Overtravel	.015 inch minimum.
	Reset button	
	Pretravel·	.060 inch maximum.
	Overtravel	.005 inch minimum
		±20 percent variation from specified values acceptable after test
	Strength of push button and push button stop	25 pounds.
	Terminal strength	5 pounds.
(D)	Material· Case, cover and push button·	Type SDGF in accordance with MIL-M-14 Push button may be flame retardant glass filled nylon which is self extinguishing when tested in accordance with method 2021 of FED-STD-406.
(D)	Dielectric withstanding voltage	Sea level - 1,000 Vrms. After electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable
	Mechanical endurance.	100,000 cycles at .015 $^{+.001}_{-.000}$ inch over-travel.
	Electrical endurance·	50,000 cycles.
	Electrical ratings	See table I.

TABLE I Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	15	15
Inductive	10	15
Motor	10	6

Part number: MS25350-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU
Navy - SH, OS
Air Force - 17, 80
DSA - ES

User activities:
Army - MI, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-0828-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:59Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization of the Navy
Washington DC 20360

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:59Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:59Z
Check the source to verify that this is the current version before use.