
MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE, SPDT, 10 AMPERES, HERMETIC

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

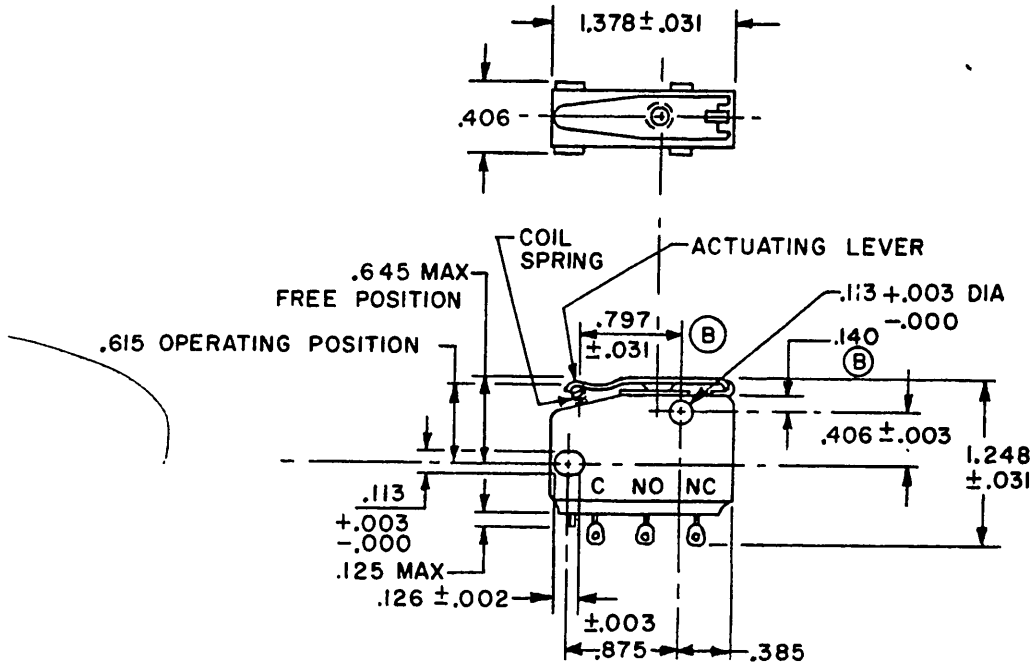


BASIC SWITCH (SHOWN WITH SOLDER TERMS)


Ⓑ denotes changes.

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 20260-17T10:59Z
Check the source to verify that this is the current version before use.




TYPE A (LEAF)




TYPE B
(SADDLE LEAF FOR HIGH AMBIENT PRESSURE)



TYPE C
(ROLLER SADDLE LEAF)

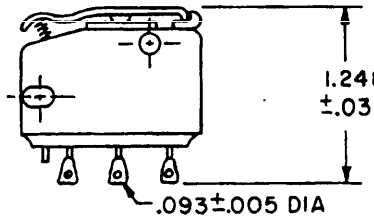

SOLDER TERMINALS

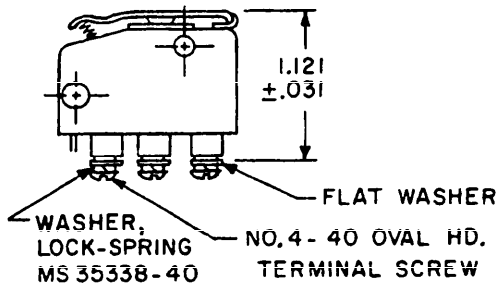

SCREW TERMINALS

INCHES	MM
.002	.05
.003	.08
.005	.13
.010	.25
.031	.79
.035	.89
.093	2.36
.113	2.87
.120	3.05
.125	3.18
.126	3.20
.140	3.56
.250	6.35
.385	9.78
.406	10.31
.615	15.62
.645	16.38
.797	20.24
.875	22.23
1.010	25.65
1.121	28.47
1.248	31.70
1.378	35.00

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015 (.38 mm).
3. Metric equivalents (to the nearest .01mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figure.
Enclosure design:	5 (Hermetic).
Temperature characteristic:	2 (-65° to +125° C).
Shock type:	M (50G).
Vibration grade:	2 (10 to 2,000 Hz).
Weight:	1.2 ounces maximum.
Operating characteristics:	See table I.

TABLE I. Operating characteristics.

	Type A	(B) Type B	(B) Type C
Actuating force:	16 ± 8 ounces	20 ± 8 ounces	16 ± 8 ounces
Release force:	3 ounces mimimum	3 ounces minimum	3 ounces minimum
Movement differential:	.020 inch maximum	.020 inch maximum	.028 inch maximum
Pretravel:	.025 inch maximum	.025 inch maximum	.035 inch maximum
Overtravel:	.015 inch minimum	.015 inch minimum	.015 inch minimum

(B) Contact resistance:	25 milliohms maximum.
Dielectric withstanding voltage:	
(B) Sea level:	1250 vrms.
Altitude - 70,000 feet:	500 vrms.
Seal test:	Only watertight test shall be performed in group A.
Mechanical endurance:	25,000 cycles.
Electrical Endurance:	25,000 cycles.
Minimum current:	25,000 cycles.
Electrical ratings:	See table II.

TABLE II. Electrical ratings.

Load	Sea level and 70,000 feet	
	28 VDC	115 VAC, 400 Hz
	amperes	amperes
Resistive	10	10
Inductive	5	5
Lamp	3	3

Qualification:	
Group submission:	See table III.

TABLE III. Qualification inspection group submission.

Examination or test	Basic switch	Other switch samples	Extent of approval
(B) Qualification inspection table of MIL-S-8805	MS24456-6 (all sample units)	MS24456-3 (2 sample units) 1. Terminal strength 2. Visual and mechanical examination MS24456-2, -4, -5, -7 (B) Visual and mechanical examination	All

Source: https://assist.dla.mil -- Downloaded: 2026-01-17T10:59Z
Check the source to verify that this is the current version before use.

Part number	Actuating leaf configuration	Terminals	Ambient pressure psig maximum 1/
(B) 2/			
MS24456-2	A	Screw	25
MS24456-3	A	Solder	25
MS24456-4	B	Screw	200
MS24456-5	B	Solder	200
MS24456-6	C	Screw	200
(B) MS24456-7	C	Solder	200

1/Maximum allowable ambient pressure without degradation of characteristics.
2/MS24456-1 has been canceled.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - EC, AS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - MI, AV
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

(Project 5930-0488-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:59Z
Check the source to verify that this is the current version before use.