INCH-POUND


MIL-DTL-83413/10C
w/AMENDMENT 2
21 December 2018
SUPERSEDING
MIL-DTL-83413/10C
w/AMENDMENT 1
29 May 2015

DETAIL SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING: JUMPER CABLE ASSEMBLY, AIRCRAFT TO FUEL NOZZLE, DISCHARGER, ELECTROSTATIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83413.

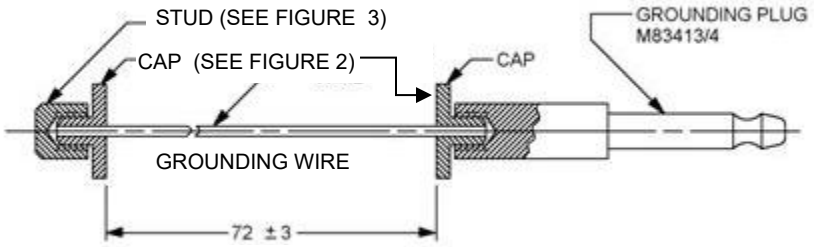

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .016 (0.41 mm).
4. The cap on this assembly is not used on plug PIN M83413/4-1.
5. QPL subcomponents shall be procured from a qualified QPL source.

FIGURE 1. Jumper cable assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

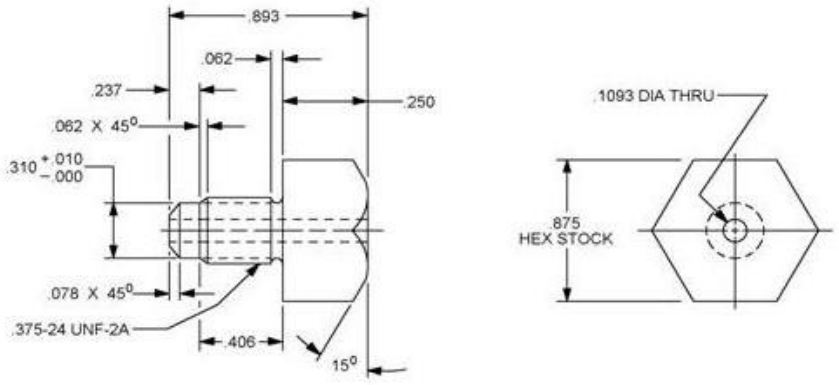

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

Inches	mm
.010	.25
.062	1.57
.078	1.98
.237	6.02
.250	6.35
.310	7.87
.406	10.31
.875	22.23
.893	22.68

FIGURE 2. Cap.

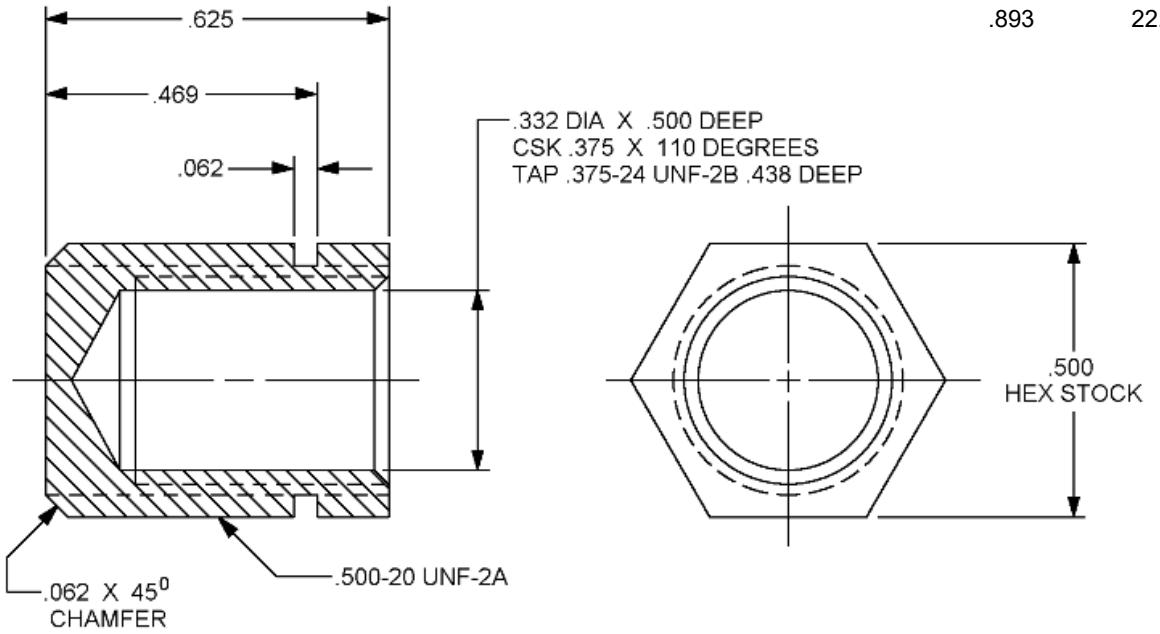

STUD

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

Inches	mm
.062	1.57
.332	8.43
.469	11.91
.500	12.70
.625	15.87

FIGURE 3. Stud.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Grounding plug in accordance with MIL-DTL-83413/4. See figure 1, note 5.

Grounding wire: M83420/4-013, 7 X 7 wire in accordance with MIL-DTL-83420/4, type II, composition B, jacket color translucent (see PIN example), or international orange in accordance with SAE AMS-STD-595/22510. See figure 1, note 5.

Splices shall not be used.

Assembly resistance: Resistance of the grounding assembly shall not exceed 6 ohms.

Part or Identifying Number (PIN):

M83413/10-1 is the assembly, see figure 1.
M83413/10-2 is the cap, see figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

QUALIFICATION: Qualification is not required. First article inspection shall consist of a visual and mechanical inspection and assembly resistance in accordance with MIL-DTL-83413 and the requirements stated in this specification sheet. First article inspection shall consist of the inspections specified in table I.

Samples for first article inspection shall be representative of the products proposed to be furnished to this specification. Test samples shall consist of 100% testing, up to 12 grounding assemblies. Test samples shall be examined and tested in accordance with MIL-DTL-83413 and this specification. Test results shall be submitted to the acquiring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection. 1/

Inspection	Grounding assembly	Requirement paragraph	Test Paragraph
Group I			
Visual and mechanical Inspection	X	3.1, 3.3, 3.4 3.6, 3.8	4.7.1
Detent action		3.5.1	4.7.2
Handgrip force		3.5.2	4.7.3
Side loading		3.5.3	4.7.4
Torque		3.5.4	4.7.5
Engagement		3.5.5	4.7.6
Contact resistance		3.5.6.1	4.7.7.1
Clamp connector resistance		3.5.6.2	4.7.7.2
Assembly resistance	X	3.5.6.3	4.7.7.3
Group II			
Cable attachment		3.5.7	4.7.8
Clamp release force (initial)		3.5.8.1	4.7.9
Clamp release force (after conditioning)		3.5.8.2	4.7.9
Clamping life		3.5.9	4.7.10
Vibration		3.5.10	4.7.11
Durability		3.5.11	4.7.12
Flexibility		3.5.13	4.7.14
Tensile strength		3.5.12	4.7.13
Crush		3.5.14	4..7.15
Group III			
Humidity		3.5.15	4.7.16
Temperature cycling		3.5.16	4.7.17
Drop		3.5.17	4.7.18
Altitude – low temperature		3.5.18	4.7.19
Dust		3.5.19	4.7.20
Fluid immersion		3.5.20	4.7.21
Salt spray		3.5.22	4.7.23
Group IV			
Lightning current		3.5.23	4.7.24

1/ - X indicates that a test is applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-83413, this document references the following:

MIL-DTL-83413/4
MIL-DTL-83420
SAE AMS-STD-595/22510

CONCLUDING MATERIAL

Custodians:
Army – AV
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5920-2018-007)

Review activities:
Army - AR, CR, CR4, MI
Navy - MC
Air Force – 02

Note: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.