INCH POUND

MIL-DTL-83413/12
w/Amendment 1
22 October 2014
SUPERSEDING
MIL-DTL-83413
18 April 2014

DETAIL SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING: GROUNDING CLAMP CONNECTOR FOR TYPES I AND III GROUNDING ASSEMBLIES, STAINLESS STEEL CLIP, ELECTRICAL

This specification is approved for used by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83413.

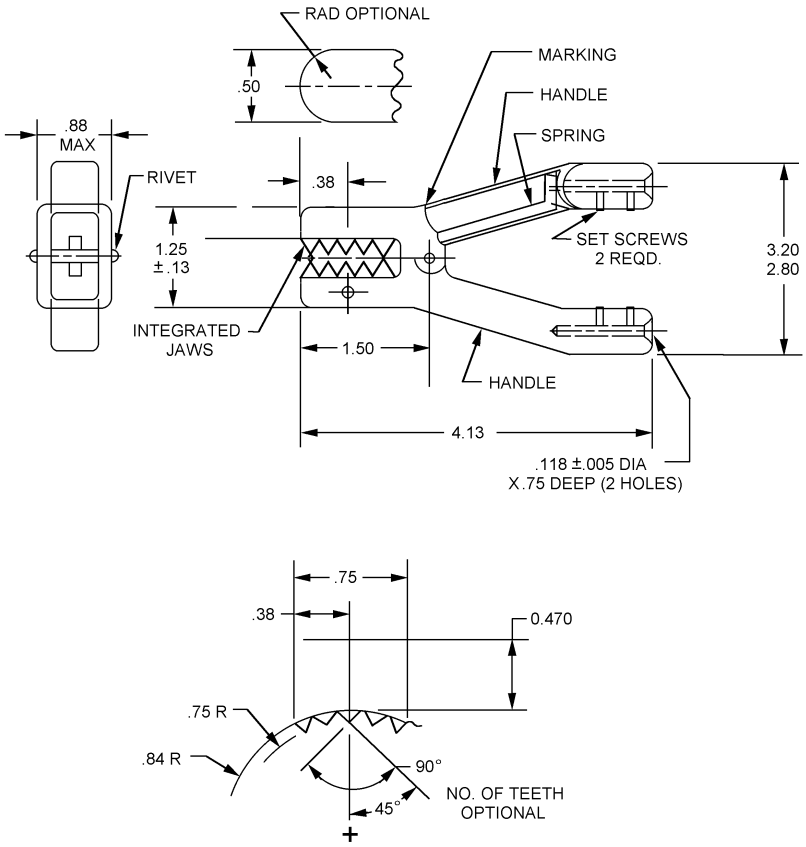


FIGURE 1. Grounding clamp, for types I and III grounding assemblies.

AMSC N/A

FSC 5999

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.113	2.87	.84	21.3
.004	0.10	.125	3.18	.88	22.4
.010	0.25	.130	3.30	1.25	31.8
.031	0.79	.203	5.16	1.50	38.1
.062	1.57	.205	5.21	2.80	71.1
.078	1.98	.380	9.65	3.20	81.3
.080	2.03	.500	12.70	4.13	104.9
.090	2.29	.750	19.1		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Surface toughness: If cast, smooth cast finish 125 or 250 all over, except machine surface 63.
4. Remove all burrs and sharp edges .010 (0.25 mm) to .020 (0.51 mm) radius.
5. Unless otherwise specified, tolerance is ±.03 (0.8 mm) on decimals and ± 1° on angles.

FIGURE 1. Grounding clamp, for types I and III grounding assemblies - Continued.

REQUIREMENTS:

Material-handle: Stainless steel in accordance with SAE-AMS-5355, or SAE-AMS-5343, grade 17-4PH, with optional passivation.

Material-spring: .125 diameter music wire in accordance with ASTM-A228/A228M, or equal. Heat treatment shall be as required to meet requirements. The spring shall be stress relieved, zinc/clear plated in accordance with ASTM-B633, or Nickel plated in accordance with ASTM-B733.

Material set screw: AIA/NASM51021, passivated in accordance with SAE-AMS 2700.

Clamp connector resistance: Shall not exceed 500 milliohms.

Salt spray: 500 hours in accordance with test procedure EIA/ECA-364-26 test condition C.

Part or Identifying Number (PIN): M83413/XX-1.

QUALIFICATION:

Qualification is not required. In addition to the stated requirements above, first article testing shall consist of dimensional verification and resistance testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-83413, this document references the following:

AIA/NASM51021
ASTM-A228/A228M
ASTM-B633
ASTM-B733
EIA/ECA-364-26
SAE-AMS 2700
SAE-AMS-5343
SAE-AMS-5355

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5999-2014-004)

Review activities:
Army - AR, CR, CR4, MI
Navy - MC
Air Force - 02, 13, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.