MILITARY SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING: GROUNDING CLAMP CONNECTOR FOR TYPES I AND III GROUNDING ASSEMBLIES, CLIP, ELECTRICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the clamp connector described herein shall consist of this specification and the latest issue of MIL-C-83413.

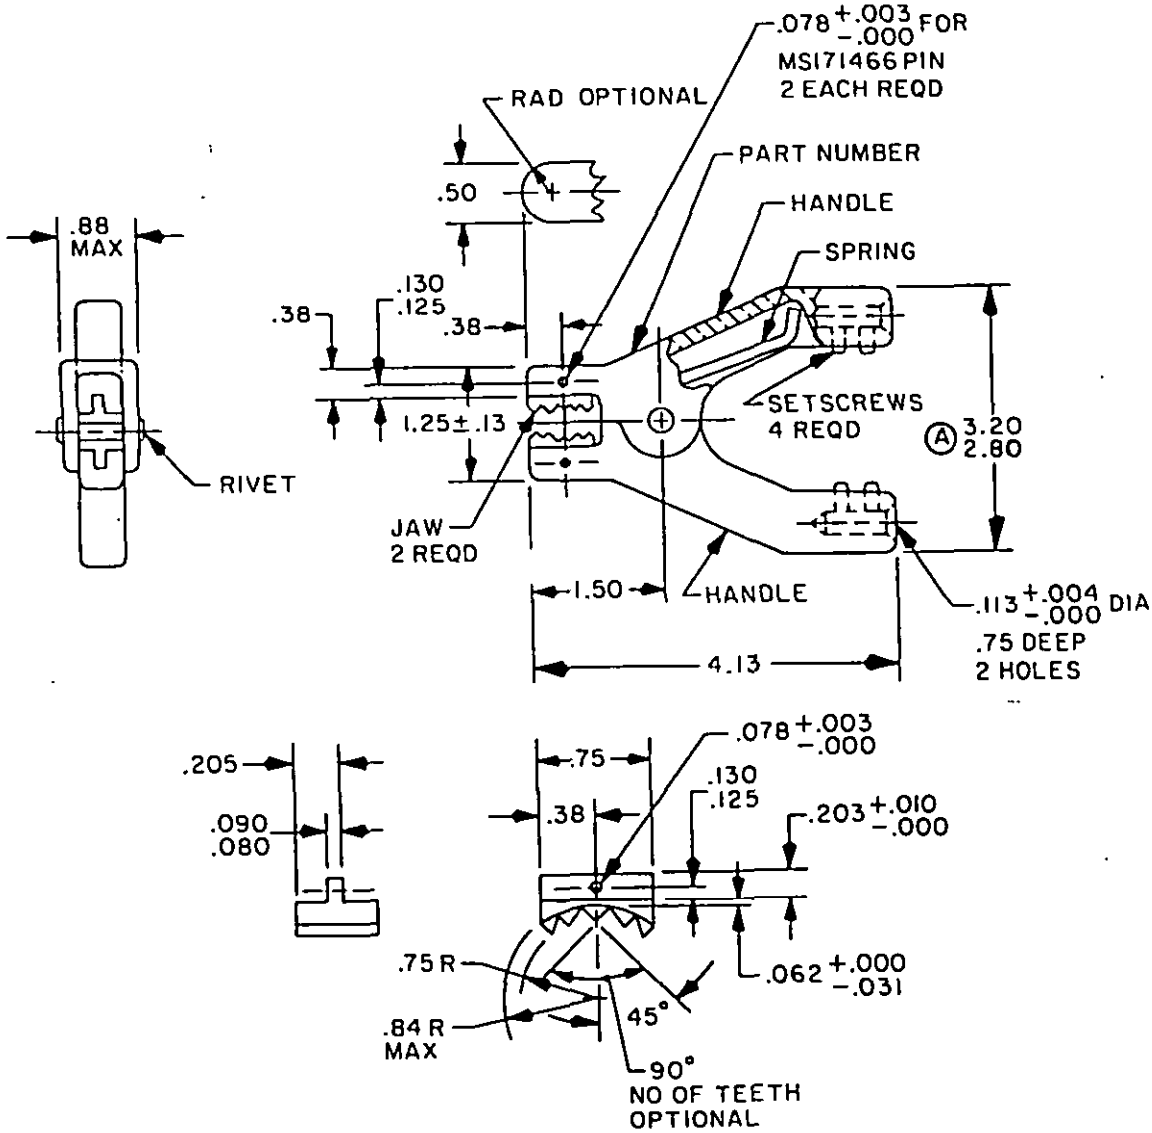


FIGURE 1. Grounding clamp, for types I and III grounding assemblies.

Ⓐ denotes change

FSC 5999

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.113	2.87	.75	19.1
.004	0.10	.125	3.18	.84	21.3
.010	0.25	.13	3.3	.88	22.4
.031	0.79	.130	3.30	1.25	31.4
.062	1.57	.203	5.16	1.50	38.1
.078	1.98	.205	6.35	2.80	76.1
.080	2.03	.38	9.7	3.20	81.3
.090	2.29	.50	12.7	4.13	104.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Surface toughness: If cast, smooth cast finish 125 or 250 all over, except machined surface 63.
4. Remove all burrs and sharp edges .010 (0.25 mm) to 020 (0.51 mm) radius.
5. Unless otherwise specified, tolerance is ±.03 (0.8 mm) on decimals and ±1° on angles.

FIGURE 1. Grounding clamp, for types I and III grounding assemblies - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(A) Material-handle: Stainless steel in accordance with MIL-S-7720, composition 302, condition A, passivated in accordance with QQ-P-35; or stainless steel in accordance with ASTM A582, type 303 condition A, cleaned in accordance with MIL-S-5002, without passivation or aluminum alloy in accordance with QQ-A-591, Alloy 360, A380 or 384.

Clamp connector resistance: Shall not exceed 500 milliohms.

Salt spray: Test condition A, method 1001, MIL-STD-1344.

Part number: M83413/7-1.

(A) Alternate JAW material: MP1F FX - 1008-110HT in accordance with Material Handbook, Ninth Edition, Volume 7, Power Metallurgy by American Society of Metal, or equivalent.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review activities:
Army - ME, AR, CR, MI
Air Force - 13, 18, 82, 85, 90, 99
DLA - ES

User activity:
Navy - MC

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5999-0194)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.