
INCH-POUND
MIL-C-83413/7B
27 Dec 93
SUPERSEDING
MIL-C-83413/7A
15 March 1989

MILITARY SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING: GROUNDING CLAMP CONNECTOR FOR TYPES I AND III GROUNDING ASSEMBLIES, CLIP, ELECTRICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of specifications and standards (DODISS) specified in the solicitation: MIL-C-83413.

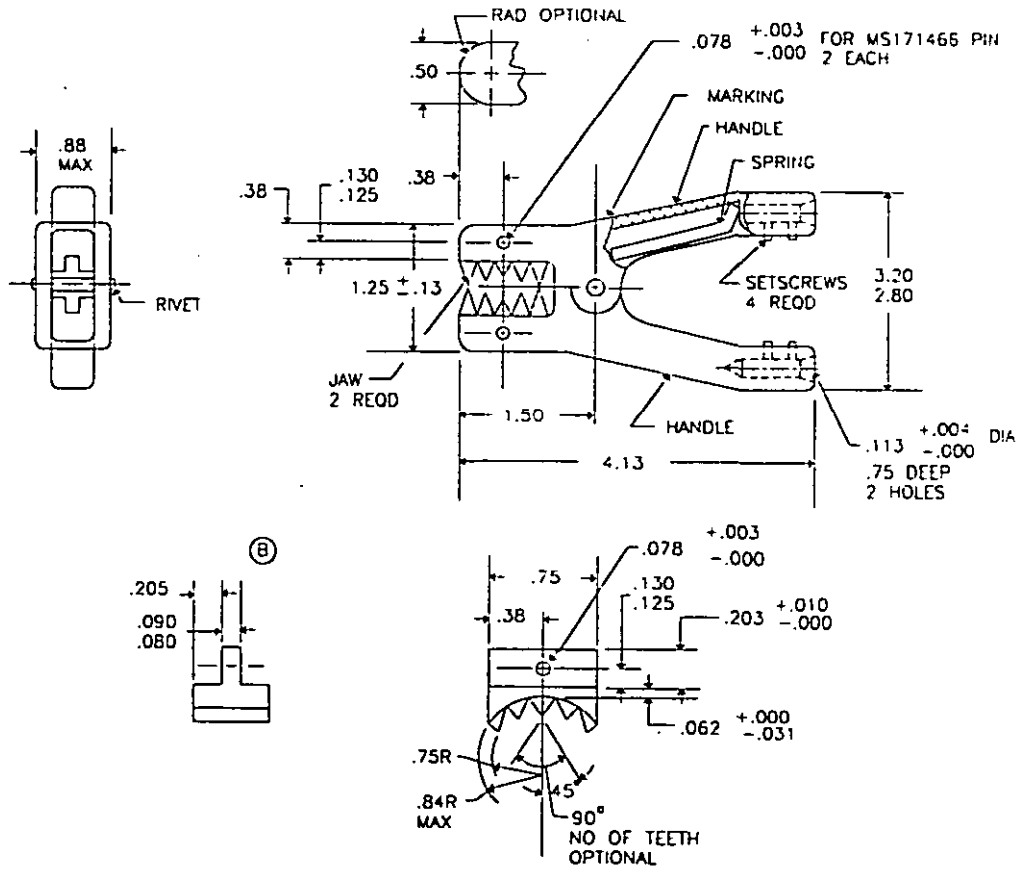

JAW DETAIL

FIGURE 1. Grounding clamp, for types I and III grounding assemblies.

(B) denotes changes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.113	2.87	.75	19.1
.004	0.10	.125	3.18	.84	21.3
.010	0.25	.13	3.3	.88	22.4
.031	0.79	.130	3.30	1.25	31.4
.062	1.57	.203	5.16	1.50	38.1
.078	1.98	.205	6.35	2.80	76.1
.080	2.03	.38	9.7	3.20	81.3
.090	2.29	.50	12.7	4.13	104.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Surface toughness:. If cast, smooth cast finish 125 or 250 all over, except machine surface 63.
4. Remove all burrs and sharp edges .010 (0.25 mm) to .020 (0.51 mm) radius.
5. Unless otherwise specified, tolerance is ±.03 (0.8 mm) on decimals and ± 1° on angles.

FIGURE 1. Grounding clamp, for types I and III grounding assemblies - Continued.

REQUIREMENTS:

Material-handle: Stainless steel in accordance with MIL-S-7720, composition 302, condition A, passivated in accordance with qq-p-35; or stainless steel in accordance with ASTM A582, type 303 condition A, cleaned in accordance with MIL-S-5002, without passivation or aluminum alloy in accordance with QQ-A-591, Alloy 360, A380 or 384.

Clamp connector resistance: Shall not exceed 500 milliohms.

Salt spray: Test condition A, method 1001, MIL-STD-1344.

Part OR Identifying Number (PIN): M83413/7-1.

Alternate Jaw material: MP1F FX - 1008-110HT in accordance with material Handbook, Ninth Edition, Volume 7, Power Metallurgy by American Society of Metal, or equivalent.

(B) QUALIFICATION:

(B) Qualification is not required for this specification sheet. First article inspection shall be a visual and mechanical inspection in accordance with 4.7.1 of MIL-C-83413.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 85

Review activities:
Army - AR, CR, ME, MI
Navy - MC
Air Force - 13, 18, 82, 90, 99

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0314)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:02Z
Check the source to verify that this is the current version before use.