
FED. SUP CLASS
5930

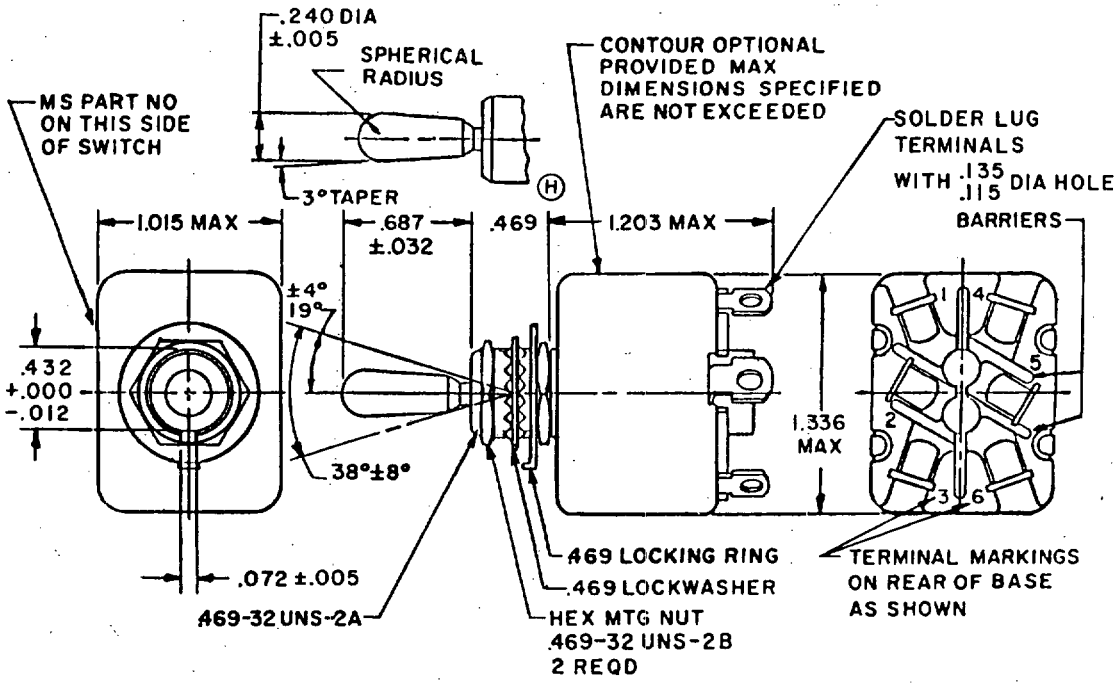

Ⓗ DENOTES CHANGE

P.A AF-85 Other Cust ARMY-ER NAVY-AS	International interest	TITLE TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS 14002
Procurement Specification MIL-S-8834		SUPERSEDES: MS0014002 (USAF)	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5930-1331-02

AMSC N/A

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

APPROVED 31 DEC 68 REVISED Ⓗ 30 SEP 86

User activities: Army - Navy - Air Force -

Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

DETAIL REQUIREMENTS

MS dash no	Circuit made between terminals as indicated with the toggle lever in these positions:			Current capacity amperes per pole 28 volts dc			Current capacity amperes per pole 115 volts 400 hertz ac			Current capacity amperes per pole 115 volts 60 hertz ac		
	Opposite keyway side	Center position	Keyway side	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit
-212	on 2-3, 5-6	off	on 1-2,4-5	7	25	15	7	25	15	7	20	15
-222		none	off									
-232			on 1-2,4-5									
-242		off	none									
-262		none	mom-on 1-2,4-5									
-272	mom-on 2-3, 5-6	off										
-282	none		mom-off									
-292	on 2-3, 5-6	none										
-302	off		mom-on 1-2,4-5									
-312	on 2-3, 5-6	off										

1/ Application information ratings at room temperature.

APPROVED 31 DEC 68 REVISED (H) FOR CHANGES SEE PAGE 1 & 3

FED. SUP CLASS 5930

P.A AF - 85

International interest

Other Cust ARMY - ER NAVY - AS

Procurement Specification MIL-S-8834

TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES

SUPERSEDES: MS0014002(USAF)

MILITARY STANDARD MS14002

PAGE 2 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

DETAIL REQUIREMENTS

MS dash no	Current capacity amperes per pole 1/ 250 volts 60 hertz ac			Current capacity amperes per pole 1/ 125 volts dc			Current capacity amperes per pole 1/ 250 volts dc			Life low current level switching 30 mV
	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit	
-212 -222 -232 -242 -262 -272 -282 -292 -302 -312		10	7		750 mA			500 mA		10 mA (H)

1/ Application information ratings at room temperature.

User activities: Army - Navy - Air Force -

Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 31 DEC 68 REVISED (H) FOR CHANGES SEE PAGE 1 & 3

P.A AIR FORCE-85 Other Cust ARMY-ER NAVY-AS	International interest	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS14002
Procurement Specification MIL-S-8834		SUPERSEDES: MS0014002(USAF)	PAGE 3 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm
.005	0.13	.135	3.43
.010	0.25	.240	6.10
.012	0.30	.432	10.97
.030	0.76	.469	11.91
.032	0.81	.687	17.45
.072	1.83	1.015	25.78
.115	2.92	1.203	30.56
		1.336	33.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition ducuments referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. Configuration of switch case housing, terminals and barrier; design optional providing maximum dimensions specified are not exceeded.
8. Weight: .113 pound maximum (51.2 grams).
9. Altitude requirement: 80,000 feet.
10. 115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.
11. Contact Bounce: Shall not exceed 3.5 milliseconds.

APPROVED 31 Dec 68
REVISED (H) FOR CHANGES PAGE 1 & 3

User activities: Army - Navy - Air Force -
Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.