THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

FORM APPROVED
OMB NO. 0704-0188

COLOR CODED AIRCRAFT TIRE IDENTIFICATION TAPE

APPLICATION: THIS STANDARD APPLIES TO ALL AIRCRAFT TIRES MANUFACTURED/REBUILT FOR THE DEPARTMENT OF DEFENSE.

PURPOSE. THIS STANDARD ESTABLISHES REQUIREMENTS FOR COLOR CODED AIRCRAFT TIRE IDENTIFICATION TAPE.

1. ALL AIRCRAFT TIRES MANUFACTURED/REBUILT FOR THE DEPARTMENT OF DEFENSE SHALL BE TAPED BEFORE DELIVERY, WITH A CIRCUMFERENTIAL BAND OF ONE (1) INCH, PRESSURE-SENSITIVE TAPE, COMPLETELY AROUND THE CENTERMOST RIB OF THE TREAD.

2. THE ENDS OF THE TAPE SHALL OVERLAP APPROXIMATELY FOUR (4) INCHES FOR ANY SPLICE AND UPON COMPLETION OF THE WRAP.

3. THE PRESSURE-SENSITIVE TAPE SHALL BE CONSTRUCTED SO THAT NORMAL SHIPPING AND HANDLING WILL NOT DEFACE OR REMOVE IT FROM THE TIRE, BUT SHALL BE EASILY REMOVED IN ONE CONTINUOUS STRIP PRIOR TO TIRE INSTALLATION.

4. THE TAPE COLORS AND SHADES SHALL BE IN ACCORDANCE WITH THIS STANDARD AND FEDERAL STANDARD 595.

TABLE I. TIRE YEAR OF MANUFACTURE DESIGNATION

(E) YEAR OF MANUFACTURE 1/			COLOR	SHADE
1977	1984	1991	GREY	26373
1978	1985	1992	GREEN	14187
1979	1986	1993	BLUE	15123
1980	1987	1994	ORANGE	12246
1981	1988	1995	YELLOW	13655
1982	1989	1996	VIOLET	17142
1983	1990	1997	RED	11105

1/ TIRES MANUFACTURED PRIOR TO 1977 SHALL BE IDENTIFIED BY RED TAPE (SHADE 11105) AND THE 1976 YEAR MARKING.

TABLE II. MANUFACTURER/REBUILDER DESIGNATION

(E) MANUFACTURER/REBUILDER	COLOR	SHADE
AIR-TREADS	RED	11136
DUNLOP AVIATION	WHITE	17875
B.F. GOODRICH	BLACK	17038
GOODYEAR	GREEN	14062
MICHELIN	YELLOW	13538
SHELBY	PINK	11630
THOMPSON	BROWN	10080

5. THE TAPE SHALL BE A SOLID COLOR TO INDICATE THE YEAR OF MANUFACTURE FOR BOTH NEW AND REBUILT TIRES. THE DATE OF REBUILDING SHALL NOT BE USED ON THE TAPE.

6. THE YEAR OF MANUFACTURE SHALL BE PRINTED ON THE TAPE. THE NUMBERS SHALL BE PRINTED IN THE CENTER OF THE TAPE, IN A NEAT, LEGIBLE MANNER AND SHALL BE REPEATED CONTINUOUSLY FOR TOTAL LENGTH OF THE TAPE PER GIVEN ROLL WITH THREE (3) INCHES SPACING BETWEEN PRINTED DATES. YEAR DATE NUMBERS SHALL BE THREE-QUARTERS (3/4) INCH IN HEIGHT, ONE-EIGHTH (1/8) INCH IN WIDTH AND BLACK OR WHITE IN COLOR. SPACING BETWEEN THE NUMBERS SHALL BE NO LESS THAN ONE-EIGHTH OR MORE THAN ONE-QUARTER (1/4) INCH. THE PRINTING SHALL BE INDELIBLE AND RESISTANT TO ANY ABRASION RESULTING FROM HANDLING OPERATIONS.

7. NEW TIRE IDENTIFICATION TAPE

7.1 IN ADDITION TO THE SOLID COLOR AND PRINTED DATE TO INDICATE YEAR OF MANUFACTURE, THE TAPE FOR NEW TIRES SHALL HAVE A ONE-HALF (1/2) INCH WIDE HORIZONTAL STRIPE ACROSS THE WIDTH OF THE TAPE IN A COLOR CORRESPONDING TO THE MANUFACTURER'S IDENTIFICATION COLOR IN TABLE II. THE HORIZONTAL STRIPE SHALL BE REPEATED EVERY SIX (6) INCHES TO INDICATE MANUFACTURER OF THE TIRE. AN OPTIONAL THREE-SIXTEENTH (3/16) INCH WHITE BORDER IS PERMITTED AROUND THE STRIPE AS SHOWN IN FIGURE 1.

8. REBUILT TIRE IDENTIFICATION TAPE

8.1 IN ADDITION TO THE SOLID COLOR AND PRINTED DATE TO INDICATE YEAR OF MANUFACTURE, THE TAPE FOR REBUILT TIRES SHALL HAVE A DIAMOND DESIGN PRINTED ON IT IN A COLOR CORRESPONDING TO THE REBUILDERS' IDENTIFICATION COLOR OUTLINED IN TABLE II. THE DIAMOND SHALL BE NO LESS THAN ONE AND ONE-QUARTER (1-1/4) INCHES AND NO MORE THAN ONE AND ONE-HALF (1-1/2) INCHES IN LENGTH AND APPROXIMATELY FIFTEEN-SIXTEENTHS (15/16) OF AN INCH IN WIDTH AND SHALL BE REPEATED EVERY SIX AND ONE-HALF (6-1/2) INCHES TO INDICATE THE REBUILDER AS ILLUSTRATED ON SHEET 3 OF THIS STANDARD. AN OPTIONAL THREE-SIXTEENTH (3/16) INCH WHITE BORDER IS PERMITTED AROUND THE STIPE AS SHOWN IN FIGURE 1.

9. ALL NEW TIRE MANUFACTURERS AND REBUILDING CONTRACTORS SHALL SUBMIT A TEN (10) YARD SAMPLE OF EACH DIFFERENT COLOR CODED TAPE TO THE COGNIZANT ENGINEERING ACTIVITY FOR APPROVAL. EACH TAPE SHALL BE VERIFIED AS TO ITS CONFORMANCE WITH FEDERAL STANDARD 595 PRIOR TO USE.

(E) 10. COGNIZANT ENGINEERING ACTIVITY - THE DESGNATED TRI-DEPARTMENT ENGINEERING ACTIVITIES ARE AS FOLLOWS:
ARMY - U.S. ARMY AVIATION RESEARCH AND DEVELOPMENT COMMAND, 4300 GOODFELLOW BLVD. ST. LOUIS, MO. 63120
AIR FORCE - OO-ALC/MMILBE, HILL AFB, UTAH 84056
NAVY - COMMANDING OFFICER, NAVAL AVIATION DEPOT, SAN DIEGO, CA. 92135-5112, ATTN: CODE 34300

(E) DENOTES CHANGES

PREPARING ACTIVITY NAVY — AS
CUSTODIANS ARMY — AV NAVY —
AIR FORCE — 99 DLA —
REVIEW JULY 11, 90
USER
PROJECT NUMBER 2620-0263

MILITARY SPECIFICATION SHEET

TITLE
TAPE, IDENTIFICATION, COLOR CODED, FOR AIRCRAFT TIRES

SPECIFICATION SHEET NUMBER
MS14113E 18 JUL 90

SUPERSEDING
MS14113D 23 AUG 85

AMSC — N/A FSC 2620

DISTRIBUTION STATEMENT
A APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

DD FORM 1 MAY 88 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

FORM APPROVED
OMB NO 0704-0188

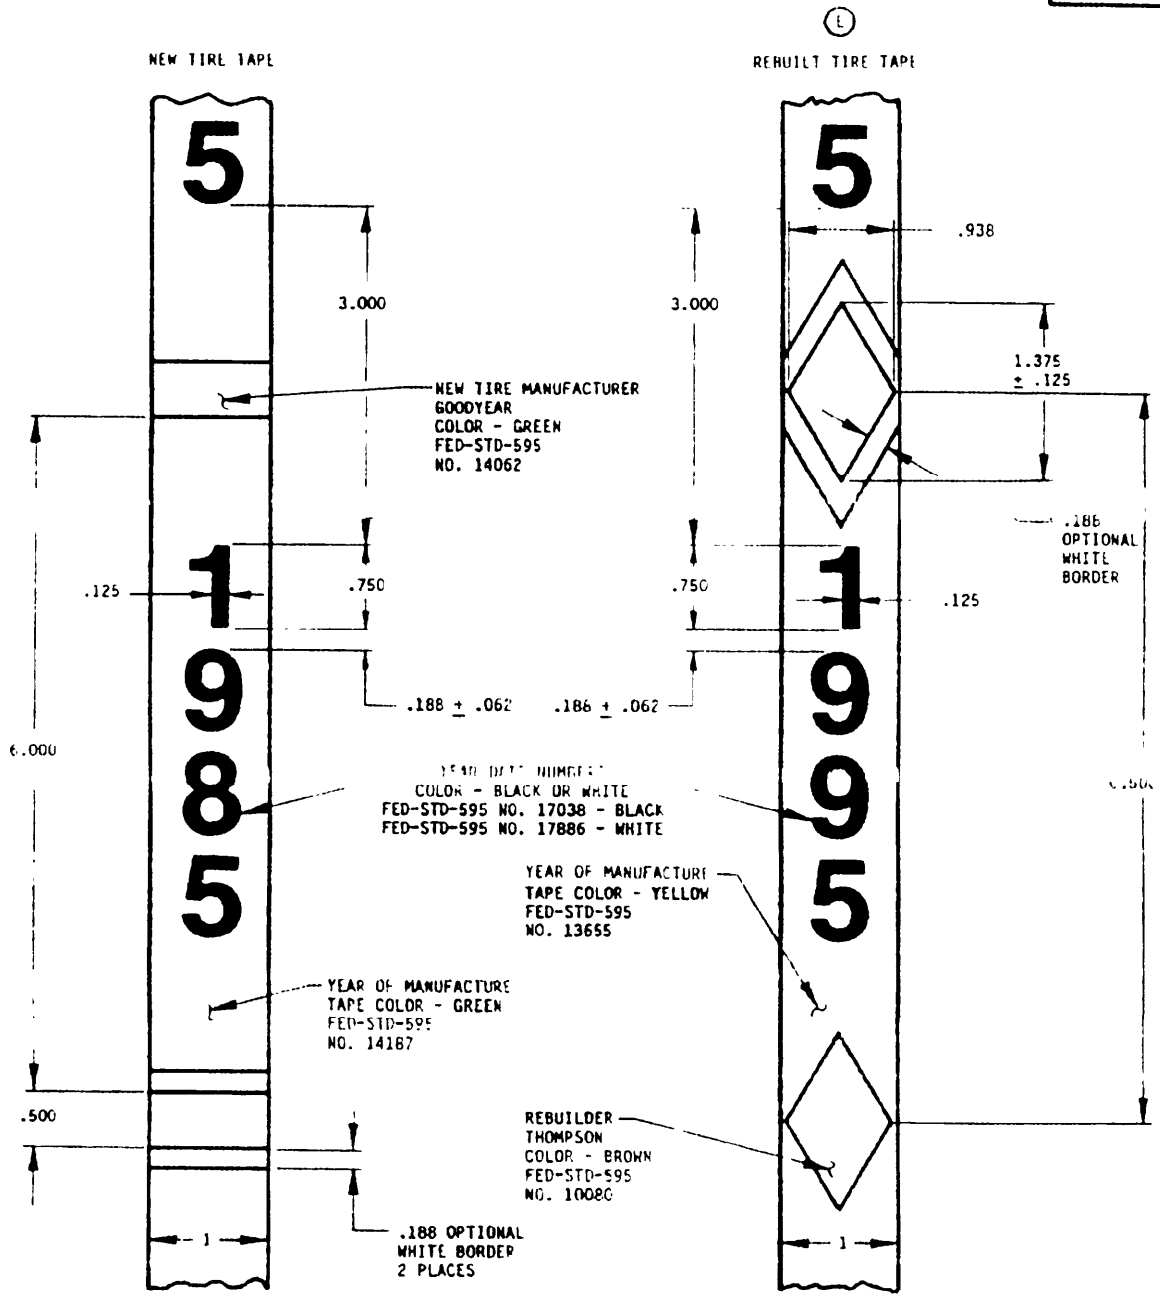


FIGURE 1. TIRE TAPE DESIGNATION AND ARRANGEMENTS

NOTE: DIMENSIONS ARE IN INCHES.

PREPARING ACTIVITY NAVY — AS

CUSTODIANS ARMY — AV NAVY —
AIR FORCE — 99 DLA —

REVIEW USAF-11, 70
USER.
PROJECT NUMBER 2620-0263

MILITARY SPECIFICATION SHEET

TITLE
TAPE, IDENTIFICATION, COLOR CODED, FOR AIRCRAFT TIRES

SPECIFICATION SHEET NUMBER
MS14113E 18 JUL 90

SUPERSEDING
MS14113D 23 AUG 85

AMSC - N/A FSC 2620

DISTRIBUTION STATEMENT
A APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED

DD FORM 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.