
FED. SUP CLASS
6115

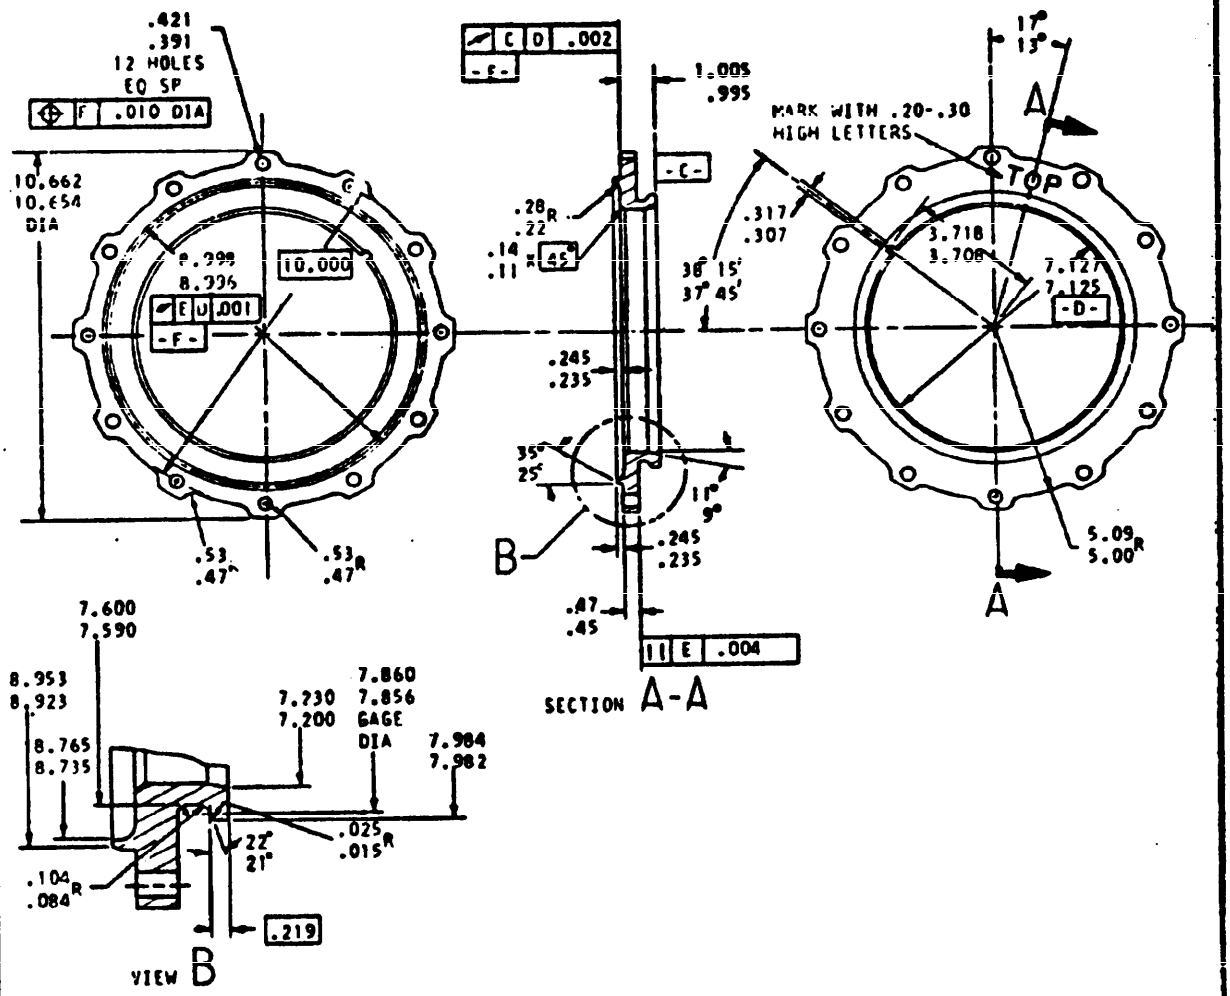

. MATERIAL: MIL-S-5626 (STEEL:CHROME-MOLYBDENUM(AISI 4140) BARS, ROD, AND FORGING STOCK (FOR AIRCRAFT APPLICATIONS) OR AMS 5622 (17-4 PH STAINLESS STEEL)

FINISH: MIL-C-81751 TYPE 1, CLASS 2 (COATING, METALLIC-CERAMIC).

HARDNESS: MIL-H-6875 (HEAT TREATMENT FOR STEELS, AEROSPACE PRACTICE) FOR MIL-S-5626 MATL, AND RH1025 FOR AMS 5622 MATL.

DIMENSIONS: ANSI Y14.5-1973 - Dimensioning and Tolerancing shall apply.

PART NO. M14165 1

APPROVED 28 Jan 1976 REVISED

P.A.	TITLE	MILITARY STANDARD
Other Cust	AIRCRAFT ACCESSORY MOUNTING	MS 14165(AS)
Procurement Specification	SUPERSEDES:	SHEET 1 OF 2


DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:36Z
Check the source to verify that this is the current version before use.

NOTICE. Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
6115

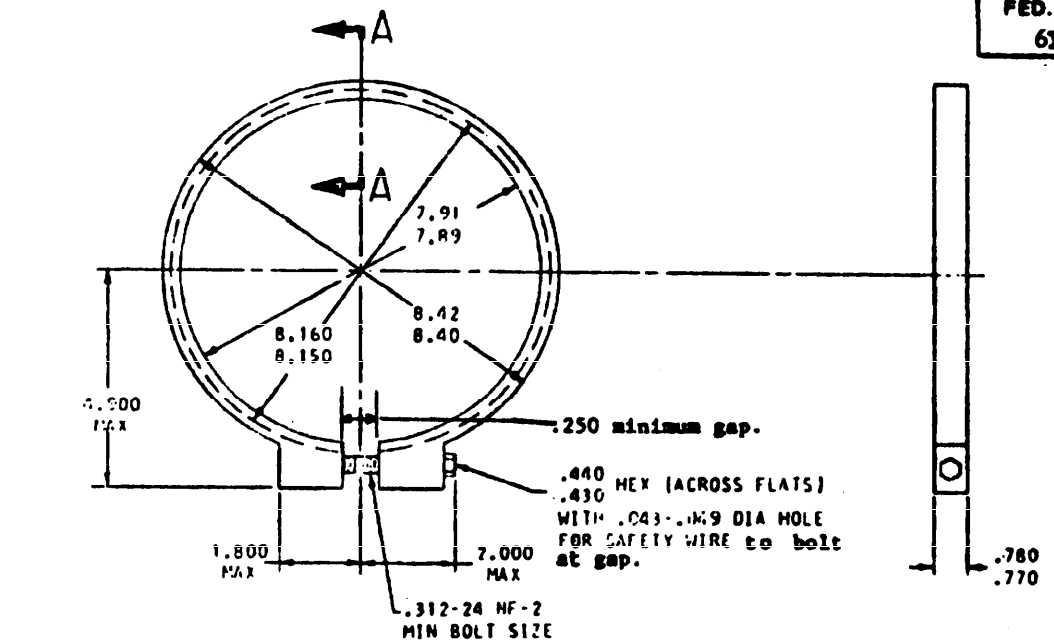

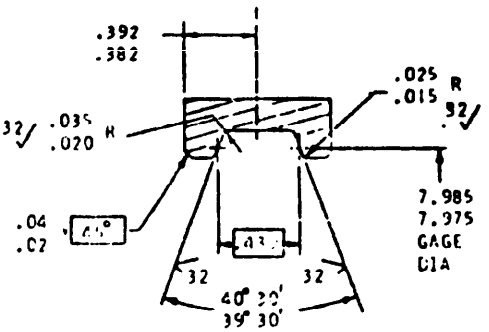

SECTION A-A

MATERIAL: MIL-S-5626 (STEEL:CHROME-MOLYBDENUM(AISI 4140) BARS,ROD, AND FORGING STOCK (FOR AIRCRAFT APPLICATIONS).

FINISH: MIL-C-81751 TYPE 1, CLASS 2 (COATING, METALLIC-CERAMIC) EXCEPT THREADED PARTS CADMIUM PLATED PER QQ-P-416 TYPE 2, CLASS 1.

WELDING: MIL-W-8611 (WELDING, METAL ARC AND GAS, STEELS, CORROSION AND HEAT RESISTANT ALLOYS).

HARDNESS: MIL-H-6875 (HEAT TREATMENT FOR STEELS, AEROSPACE PRACTICE) EXCEPT RHc 35-40.

DIMENSIONS: ANSI Y14.5-1973 - Dimensioning and Tolerancing shall apply.

COUPLING ASSEMBLY SHALL BE CAPABLE OF 150 LB IN. BOLT TORQUE WHEN COUPLING IS MOUNTED AND TIGHTENED ON RING P/N M14165 -1 AND AIRCRAFT ACCESSORY WITH MATCHING LIP.

COUPLING DIMENSIONS APPLY WHEN COUPLING IS IN FREE POSITION

EACH DEVICE SHALL CONSIST OF ONLY ONE PART INSTALLATION. NO PART OF THE DEVICE SHALL BECOME SEPARATED FROM THE REST WHEN THE DEVICE IS UNINSTALLED.

THE DEVICE SHALL BE CAPABLE OF SPREADING TO .799 MIN WHEN HEX BOLT IS LOOSENED

PART NO. M14165-2

APPROVED 28 Jan 1976 REVISED

P.A.	TITLE	MILITARY STANDARD
Other Cust	AIRCRAFT ACCESSORY MOUNTING	MS 14165(AS)
Procurement Specification	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:36Z
Check the source to verify that this is the current version before use.