
This military standard is approved by the Department of Defense and is mandatory on all activates. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

OTHER INTEREST: SAA – REVIEW
EL – REVIEW
CG - REVIEW

REVIEW/USER INFORMATION IS CURRENT AS OF THE DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

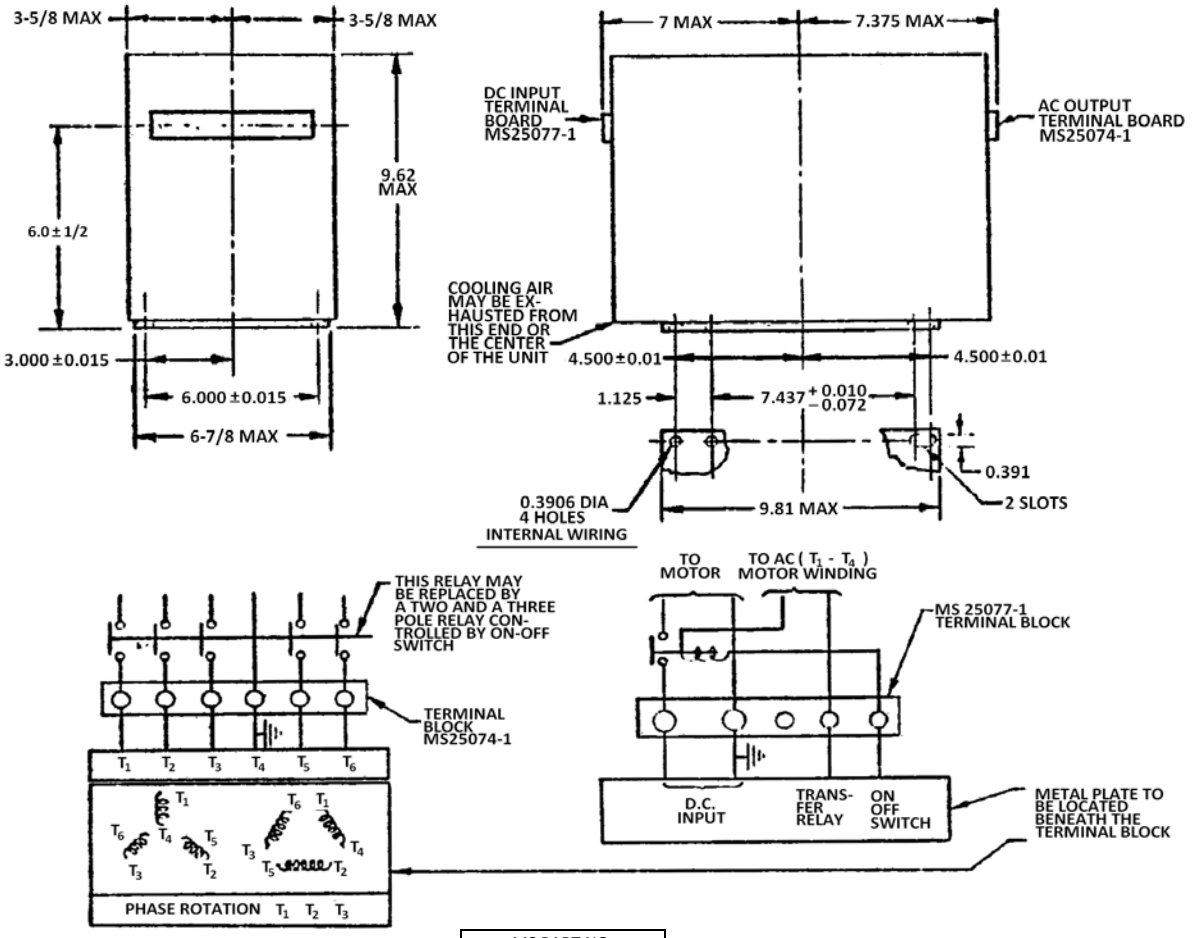

MS PART NO.
MS16062-1

INPUT	3Ø	1Ø
VOLTS, DC	28	28
OUTPUT		
VOLTS, AC	115/200	115
FREQUENCY, CPS	400	400
VA TO 50,000 FEET ALTITUDE	2500	2500
VA TO 65,000 FEET ALTITUDE	1250	1250
POWER FACTOR LOAD, MINIMUM LAG, PERCENT	90	90
POWER FACTOR LOAD, MINIMUM LEAD, PERCENT	95	95
OUTPUT VOLTAGE AT 200 PERCENT RATED LOAD CURRENT, MINIMUM	50/85	50
MINIMUM EFFICIENCY AT RATED LOAD, SEA LEVEL AND 25˚C + 15˚C, PERCENT WEIGHT, POUNDS, MAXIMUM	55 48	50 48

FOR ANY COMBINATION OF CONDITIONS LISTED BELOW THE OUTPUT VOLTAGE AND FREQUENCY SHALL REMAIN WITHIN THE INDICATED LIMITS

CONDITIONS	LIMITS	
	VOLTS	FREQUENCY, CPS
INPUT VOLTAGE VARIED BETWEEN 26 AND 29 VOLTS LOAD VARIED FROM NO LOAD TO FULL LOAD AMBIENT TEMPERATURE – ALTITUDE VARIED WITHIN THE RANGE ESTABLISHED BY CURVE 1 OF MS33543 EXCEPT AMBIENT TEMPERATURE SHALL NOT EXCEED 85 ˚C. RATED OUTPUT TO 50,000 FEET; 50 PERCENT RATED OUTPUT TO 65,000 FEET LOAD POWER FACTOR VARIED FROM 0.90 LAG TO 0.95 LEAD	LOW 110/192 HIGH 120/208	LOW 390 HIGH 410
INPUT VOLTAGE VARIED BETWEEN 26 AND 29 VOLTS LOAD POWER FACTOR 1.0 LOAD VARIED FROM NO LOAD TO FULL LOAD ANY FIXED AMBIENT TEMPERATURE BETWEEN -55˚C AND +85˚C	LOW 112.5/196 HIGH 117.5/204	LOW 390 HIGH 410

APPROVED 13 Oct 60 REVISED (A) 16 Feb 1961 (B) 17 April 1961 (C) 3 Feb 1964

P.A. WEP Other Cust. AF – ASD A – MO	TITLE **INVERTER, 2500 VA, 3/Ø, CLASS B**	**MILITARY STANDARD** **MS16062**
PROCUREMENT SPECIFICATION MIL – I – 7032	SUPERSEDES BUWEPS DWG NOS E-1725 & E-1737	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:52Z
Check the source to verify that this is the current version before use.

REVIEW/USER INFORMATION IS CURRENT AS OF THE DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

OTHER INTEREST: SAA – REVIEW
EL – REVIEW
CG - REVIEW

This military standard is approved by the Department of Defense and is mandatory on all activates. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTES:

1. DIMENSIONS IN INCHES.
2. THIS INVERTER DESIGN SHALL BE SUCH THAT IT MAY BE LOADED EITHER 3Ø OR 1 Ø BUT NOT SIMULTANEOULY. WHEN USED AS A SINGLE-PHASE INVERTER THE UNIT SHALL BE CONNECTED IN DELTA AND THE LOAD CONNECTED TO THE TERMINALS T_4 AND T_1. WHEN USED 3Ø THE LOADS PER PHASE SHALL NOT DIFFER BY MORE THAN 10 PERCENT OF THE INVERTER RATING.
3. THE AIRCRAFT MANUFACTURER SHALL ALLOW CLEARANCE OF AT LEAST ONE INCH AT EACH END OF THE INVERTER IN ADDITION TO THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.
4. THE WEIGHT AND DEMENSIONS SHOWN ON THIS DRAWING SHALL INCLUDE THE WEIGHT AND DIMENSIONS OF ALL AUXILIARY APPARATUS NECESSARY TO MAKE THE UNIT CONFORM TO THE PROCUREMENT SPECIFICATION.
5. THIS UNIT SHALL BE PROVIDED WITH A STATIC SEMI-CONDUCTOR TYPE VOLTAGE AND FREQUENCY REGULATOR. THE MEANS OF ADJUSTING THE VOLTAGE SHALL BE ON THE SAME END AS THE TERMINAL BOARD AND ABOVE THE HORIZONTAL CENTERLINE OF THE INVERTER.
6. PERMISSION OF THE PROCURING ACTIVITY SHALL BE OBTAINED FOR APPLICATION OF THIS OUTSIDE OF THE SPECIFIED LIMITS.
7. NOT FOR USE ON NEW AIRCRAFT.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 13 Oct 60 REVISED (A) 16 Feb 1961 (B) 17 April 1961 (C) 3 Feb 1964

P.A. WEP Other Cust. AF – ASD A – MO	TITLE **INVERTER, 2500 VA, 3/Ø, CLASS B**	**MILITARY STANDARD** **MS16062**
PROCUREMENT SPECIFICATION MIL – I – 7032	SUPERSEDES BUWEPS DWG NOS E-1725 & E-1737	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:52Z
Check the source to verify that this is the current version before use.