
FED. SUP CLASS
6220

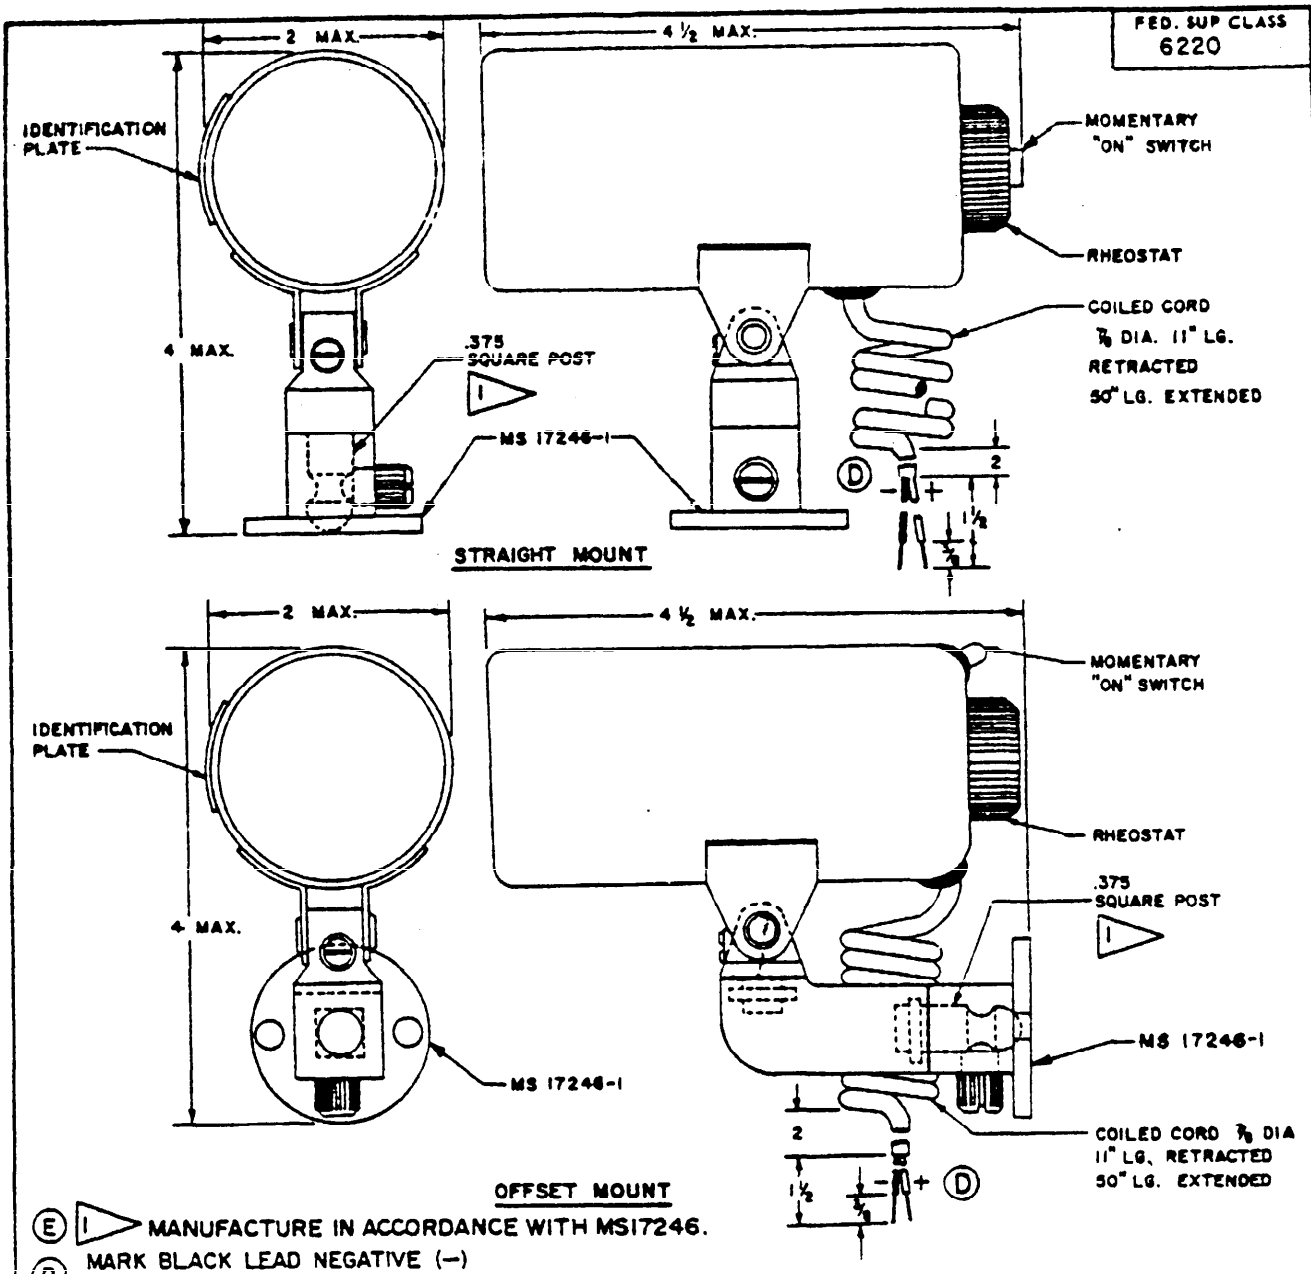


(E) 1 MANUFACTURE IN ACCORDANCE WITH MS17246.
(D) MARK BLACK LEAD NEGATIVE (–)
MARK WHITE LEAD POSITIVE (+)

LOCATIONS OF THE RHEOSTAT AND CORD ARE OPTIONAL AND MAY BE REVERSED, BUT THE SWITCH MUST REMAIN AT THE REAR OF THE LIGHT. MECHANISM PERMITS SELECTIONS OF WHITE AND RED FLOOD ON MS17245-1 THROUGH -4 AND WHITE AND RED FLOOD AND SPOT ON MS 17245 -5 AND -6. ADD SUFFIX "A" TO MS PART NO. FOR LIGHT WITHOUT MOUNTING BASE, MS PART NO. MS17246-1. (D) USE -5 FOR -1 & -6 FOR -3. (E)

| MS PART NO. | LAMP | RATED VOLTS | RATED AMPERES | LIGHT SELECTION | MOUNT (E) |
|---|---|---|---|---|---|
| ~~(E) MS 17245-1~~ | ~~MS 25231-313~~ | ~~28~~ | ~~.17~~ | ~~RED AND WHITE FLOOD~~ | ~~STRAIGHT~~ |
| MS 17245 - 2 | MS 25231 - 316 | 6 | .70 | RED AND WHITE FLOOD | STRAIGHT |
| ~~(E) MS 17245-3~~ | ~~MS 25231-313~~ | ~~28~~ | ~~.17~~ | ~~RED AND WHITE FLOOD~~ | ~~OFFSET~~ |
| MS 17245 - 4 | MS 25231 - 316 | 6 | .70 | RED AND WHITE FLOOD | OFFSET |
| MS 17245 - 5 * | MS 25231 - 313 | 28 | .17 | RED AND WHITE FLOOD AND SPOT | STRAIGHT |
| MS 17245 - 6 | MS 25231 - 313 | 28 | .17 | RED AND WHITE FLOOD AND SPOT | OFFSET |

APPROX. EXTENDED CORD LENGTH: 50"
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED * LIGHT, TYPE C-1A
TOLERANCES: DECIMALS ± .010, FRACT. ± 1/32, ANGLE ± 1°

APPROVED 28 APRIL 1961 REVISED (A) 6 JAN 64 (B) 6 DEC. 65 (C) 1 AUG. 69 (D) 24 APR. 70 (E) 7 NOV 73

REVIEWERS: DLA - GS USERS:

THIS MILITARY STANDARD HAS BEEN APPROVED BY THE DEPARTMENT AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

| | | |
|---|---|---|
| P.A. AIR FORCE - 82<br>Other Cust: AF - 99<br>ARMY - AV<br>NAVY - AS | TITLE<br>LIGHT, COCKPIT, UTILITY | MILITARY STANDARD<br>MS 17245 |
| PROCUREMENT SPECIFICATION<br>MIL-L-6484 | SUPERSEDES: | SHEET 1 OF 2 (E) |

DD FORM 672-1 (Cancelled)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.

PROJECT 6220-0307

LUMINOUS DISTRIBUTION SUMMARY

MINIMUM ACCEPTABLE MAXIMUM INTENSITY

TABLE I

| DEGREES | FLOOD (Candela)(C) | SPOT (Candela)(C) |
|---|---|---|
| 0 | 10 | 30 |
| 5 | 9.5 | 19.5 |
| 10 | 8.5 | 6.5 |
| 15 | 4.0 | 1.5 |
| 20 | 2.0 | --- |

THE DIFFERENCE OF MAXIMUM SPOTLIGHT LESS MAXIMUM FLOODLIGHT INTENSITY IS GREATER THAN OR EQUAL TO 15 CANDELA AT 0 DEGREES. THE MINIMUM ACCEPTABLE MAXIMUM INTENSITY (C) WITH THE RED FILTER IN POSITION IS GREATER THAN OR EQUAL TO 0.2 OF VALUES IN TABLE I. PHOTOMETRIC READINGS SHALL BE TAKEN AT A POINT 18 INCHES FROM LIGHT ASSEMBLY.

User activities:
review activities: DLA - GS
THIS MILITARY STANDARD IS APPROVED BY THE DEPARTMENT AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT

APPROVED 28 APR 1961 (E) For changes see pages 1 and 2



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.