

This military standard is approved for use by all Departments and Agencies of the Department of Defense and for repetitive use shall be made from this document when applicable

User activities Army - ME, AT Navy - MC, CG Air Force


Reviewer activities Army - MI Navy - AS, SH Air Force - 11,99 DLA - ES

FED SUP CLASS 5935

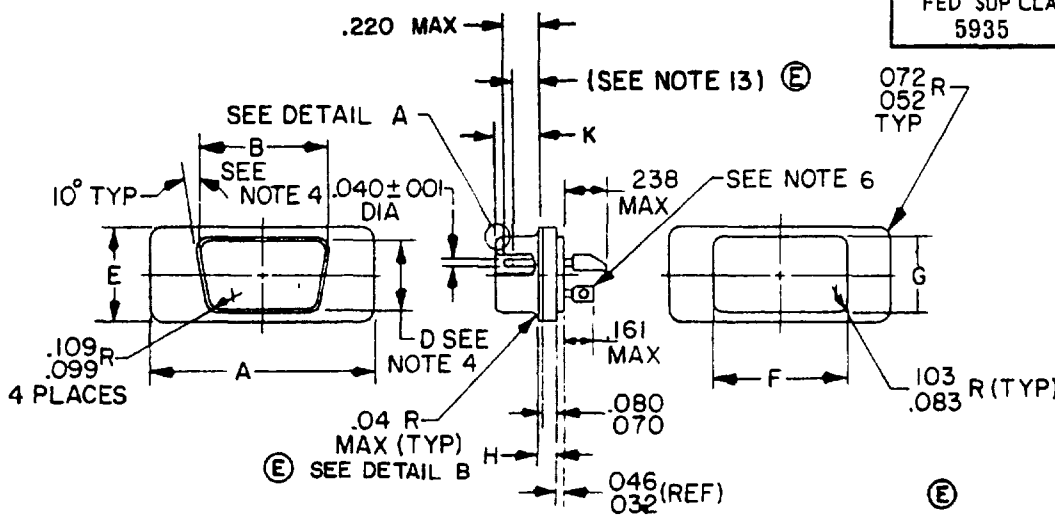




DETAIL A

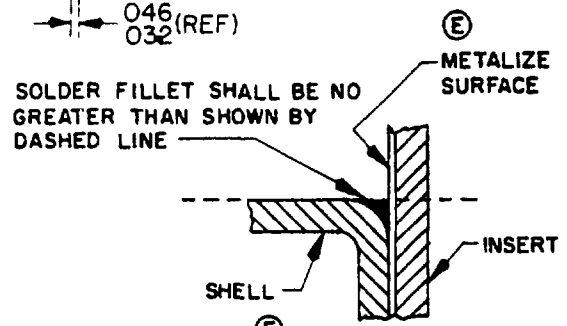

DETAIL B



SOLDER POT ARRANGMENT FOR INSERT MS 18277-1 SEE NOTE 5




FIGURE 1
PART NUMBERS
MS 18272-1 THRU MS 18272-5
WITHOUT LOCKPOST

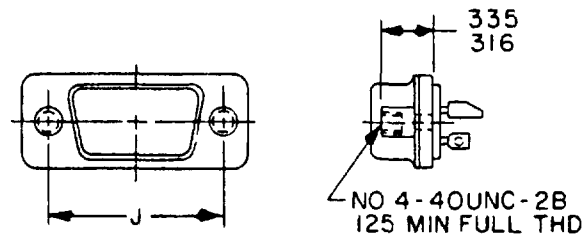


FIGURE 2
PART NUMBERS
MS 18272-6 THRU MS 18272-10
WITH LOCKPOST

ALL OTHER DETAILS AND DIMENSIONS THE SAME AS FOR MS 18272-1 THRU MS 18272-5

(E) Denotes changes

APPROVED 30 NOV 1967 REVISED (D) 15 May 1972 (E) 13 NOV 78

P A Navy - EC Other Cust AF-85 Army - CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, HERMETIC PIN CONTACTS CLASS H	MILITARY STANDARD MS18272
Procurement Specification MIL-C-24308		SUPERSEDES	PAGE 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities: Army - MI; Navy - AS, SH; Air Force - 11, 99; DLA - ES

User activities: Army - ME, AT; Navy - MC, CG; Air Force -

P.A Navy-EC
Other Cust AF-85
Army-CR

International interest

Procurement Specification MIL-C-24308

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

SUPERSEDES:

TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, HERMETIC PIN CONTACTS, CLASS H

MILITARY STANDARD

MS18272

PAGE 2 OF 3

FED SUP CLASS 5935

(E) INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.052	1.32	.103	2.62	.220	5.59
.002	.05	.070	1.78	.109	2.77	.238	6.05
.010	.25	.072	1.83	.125	3.18	.316	8.03
.032	.81	.080	2.03	.155	3.94	.335	8.51
.040	1.02	.083	2.11	.161	4.09		
.046	1.17	.090	2.51	.164	4.17		

(E)

MS NUMBER	SHELL SIZE	DIMENSION A	B	D	E	F	G	H	J	K
MS18272-1	1	1.228(31.19) 1.198(30.43)	.672(17.07) .662(16.81)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	.735(18.67) .715(18.16)	.379 (9.63) .359 (9.12)	.104(2.64) .084(2.13)		241(6 12) 229(5 82)
MS18272-2	2	1.556(39.52) 1.526(38.76)	.998(25.35) .988(25.10)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	.942(23.93) .922(23.42)	.379 (9.63) .359 (9.12)	.104(2.64) .084(2.13)		241(6 12) 229(5 82)
MS18272-3	3	2.103(53.42) 2.073(52.65)	1.540(39.12) 1.530(38 86)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	1.489(37 82) 1.469(37.31)	.379 (9.63) .359 (9.12)	.113(2.87) .093(2.36)		236(5 99) 224(5 69)
MS18272-4	4	2.744(69.70) 2.714(68.94)	2.188(55.58) 2.178(55.32)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	2.135(54.23) 2 115(53.72)	.379 (9.63) .359 (9.12)	.113(2.87) .093(2.36)		236(5 99) 224(5 69)
MS18272-5	5	2.650(67.31) 2.620(66.55)	2.084(52.93) 2.074(52.68)	.441(11.20) .431(10.95)	.620(15.75) .600(15.24)	2.010(51.05) 1.990(50.55)	.510(12.95) .490(12.45)	.113(2.87) .093(2.36)		236(5 99) 224(5 69)
MS18272-6	1	1.228(31.19) 1.198(30.43)	.672(17.07) .662(16.81)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	.735(18.67) .715(18.16)	.379 (9.63) .359 (9.12)	.104(2.64) .084(2.13)	.989(25.12) .979(24.87)	236(5 99) 224(5 69)
MS18272-7	2	1.556(39.52) 1.526(38.76)	.998(25.35) .988(25.10)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	.942(23.93) .922(23.42)	.379 (9.63) .359 (9.12)	.104(2.64) .084(2.13)	1.317(33.45) 1.307(33.20)	
MS18272-8	3	2.103(53.42) 2.073(52.65)	1.540(39.12) 1.530(38 86)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	1.489(37 82) 1.469(37.31)	.379 (9.63) .359 (9.12)	.113(2.87) .093(2.36)	1.857(47.17) 1.847(46.91)	
MS18272-9	4	2.744(69.70) 2.714(68.94)	2.188(55.58) 2.178(55.32)	.335 (8.51) .325 (8.26)	.508(12.90) .488(12.40)	2.135(54.23) 2.115(53.72)	.379 (9.63) .359 (9.12)	.113(2.87) .093(2.36)	2.505(63.63) 2.495(63.37)	
MS18272-10	5	2.650(67.31) 2.620(66 55)	2.084(52.93) 2.074(52.68)	.441(11.20) .431(10.95)	.620(15.75) .600(15.24)	2.010(51.05) 1.990(50.55)	.510(12.95) .490(12.45)	.113(2.87) .093(2.36)	2.411(61.24) 2.401(60.99)	

SEE NOTE 13

APPROVED 30 NOV 1967 REVISED (E) For changes see pages 1, 2 & 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.

NOTES

1. Dimensions are in inches.
2. Metric equivalents are in parentheses
3. Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm
4. Dimensions "B" and "D" are calculated at the start of corner radius (04 (1.0 mm) maximum) apply draft minus.
5. In insert arrangements MS 18273-1, MS 18274-1, MS 18275-1 and MS 18276-1, the contact solder pots open toward the top in the upper row and toward the bottom in the lower row. In insert MS 18277-1 the two top rows face up and the lower row opens toward the bottom. The angular position may vary ±20° from vertical centerline
6. Size 20 contact eyelet terminal flats are rotated 25° ±5° as shown
7. Connector shell is solder mount type.
8. Documents shall be of the issue in effect on date of invitation for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein
10. Patent notice The Government has a royalty free license under the U. S. Patents listed below for the benefit of manufacturers of the items disclosed and described herein, either for the Government or for use in equipment delivered to the Government.

Patent Numbers

2790153 expires April 23, 1974
3110093 expires November 12, 1980
3158424 expires November 24, 1981

11. Copyright notice All information disclosed in this military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner
12. (E) "D" dimension for shell size 5 will change from 441 - 431 (11.20 - 10.95 mm) to 446 - 436 (11.33 - 11.07 mm) effective 1 July 1980.
13. (E) Dimensions are 155 minimum full pin diameter extension (sizes 3 thru 6) and 164 minimum full pin diameter extension (sizes 1 & 2)

APPROVED 30 NOV 1967 REVISED (E) FOR CHANGES SEE PAGES 1,2 & 3

User activities: Army - ME, AT; Navy - MC, CG; Air Force -

Review activities: Army - MI; Navy - AS, SH; Air Force - 11, 99; DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A Navy - EC Other Cust AF-85 Army - CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, HERMETIC PIN CONTACTS, CLASS H	MILITARY STANDARD MS 18272
Procurement Specification MIL-C-24308		SUPERSEDES	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:19Z
Check the source to verify that this is the current version before use.