THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

Form Approved
OMB No 0704-0188

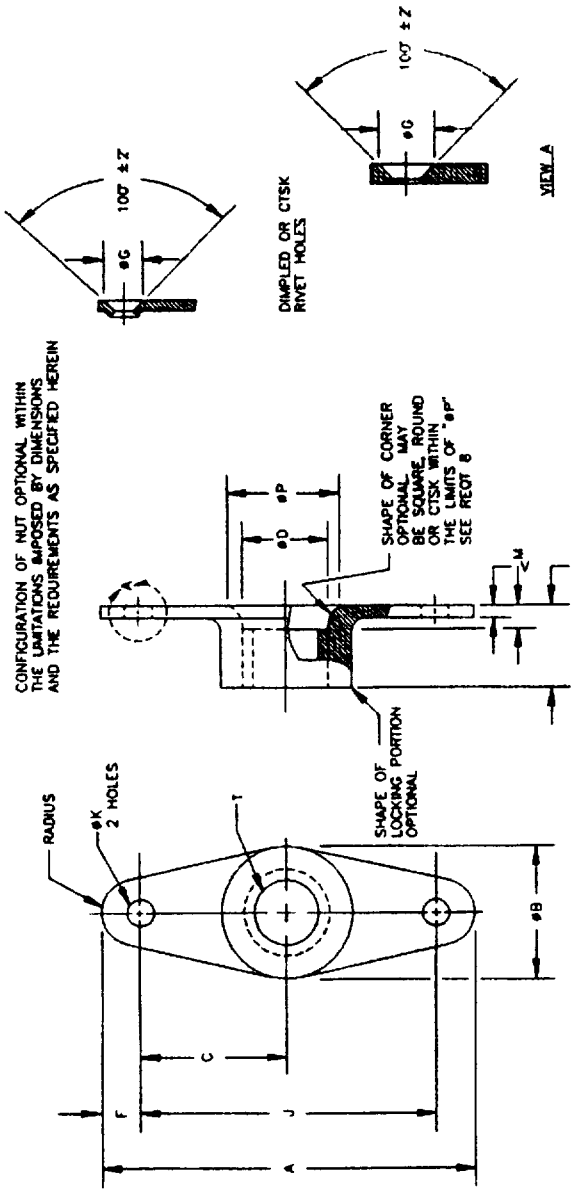


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBERS			T THREAD SIZES	A MAX	ØB MAX	ØB MIN	C ±.005	ØD MIN	F MIN	ØG ±.010	H 1/ MAX	J 2/ ±.002	ØK 3/ +.005 -.000	N MIN	ØP MAX	V MAX	AXIAL STRENGTH LBS/MIN	WEIGHT LBS/100
PLAIN RIVET HOLES		COUNTERSUNK OR DIMPLED RIVET HOLES																
NON-DRY FILM LUBRICANT	DRY FILM LUBRICANT	NON-DRY FILM LUBRICANT	DRY FILM LUBRICANT															
-04	L04	-04K	L04K	.112-40 UNJF-3B	.260	.195	.344	---	.100	.200	.143	.688	.098	---	.188	.047	750	14
-06	L06	-06K	L06K	.138-32 UNJF-3B	.348	.285	.344	---	.100	.200	.171	.688	.098	---	.209	.047	1,130	18
-08	L08	-08K	L08K	.164-32 UNJF-3B	.348	.297	.377	.188	.100	.200	.250	.688	.098	.062	.248	.047	1,720	28
-3	L3	-3K	L3K	.190-32 UNJF-3B	.348	.328	.308	.344	.184	.100	.200	.250	.688	.098	.062	.274	.047	2,460	29
-4	L4	-4K	L4K	.250-28 UNJF-3B	1.280	.414	.373	.500	.254	.100	.200	.281	1.000	.098	.062	.344	.055	4,380	53
-5	L5	-5K	L5K	.3125-24 UNJF-3B	1.282	.505	.485	.500	.317	.125	.230	.328	1.000	.130	.062	.417	.065	7,390	80
-6	L6	---	---	.375-24 UNJF-3B	1.282	.814	.564	.500	.379	.125	.230	.344	1.000	.130	.062	.505	.075	11,450	1.31
-7	L7	---	---	.4375-20 UNJF-3B	1.477	.728	.695	.562	.442	.156	.230	.390	1.125	.161	.062	.602	.085	15,450	1.84
-8	L8	---	---	.500-20 UNJF-3B	1.802	.859	.798	.625	.521	.156	.230	.609	1.250	.161	.062	.840	.115	21,110	4.80
-9	L9	---	---	.5625-18 UNJF-3B	1.727	.953	.902	.688	.584	.156	.230	.656	1.375	.161	.062	.703	.115	26,810	7.70
-10	L10	---	---	.625-18 UNJF-3B	1.852	1.016	.984	.750	.646	.156	.230	.765	1.500	.161	.062	.758	.115	34,130	8.60

1/ MINIMUM "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION.
2/ CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005
3/ DIMPLED RIVET HOLE TOLERANCE FOR "ØK" IS +.015 -.000

(F) DENOTES CHANGE(S)

INCH-POUND

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AV NAVY- AS AIR FORCE- 11 DLA- REVIEW 82 USER CR, MI PROJECT NUMBER 5310-1944	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING, PLATE, TWO-LUG, LOW HEIGHT, STEEL, 125 KSI Ftu, 450°F	SPECIFICATION SHEET NUMBER MS21047 1 FEB 94 REV F SUPERSEDING MS21047 E 30 SEPT 87 (SEE NOTE 5) AMSC- N/A FSC 5310

DISTRIBUTION STATEMENT
A. Approved for public release distribution is unlimited

Page 1 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

Form Approved
OMB No 0704-0188

REQUIREMENTS

(F) 1 MATERIAL. CARBON STEEL, COMPOSITIONS 1035 (UNS G10350) 1040 (UNS G10400) 1050 (UNS G10500) IN ACCORDANCE WITH ASTM A827 OR QQ-S-700 COMPOSITION 1042 (UNS G10420) IN ACCORDANCE WITH ASTM A29 ALLOY STEEL, GRADES 4130 (UNS G41300) 4340 (UNS G43400) AND 8740 (UNS G87400) IN ACCORDANCE WITH ASTM A29

2 FINISH. CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II, CLASS 2 FOR DRY FILM LUBRICATED NUTS THE TYPE AND CLASS ARE OPTIONAL IF THE NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416 TYPE II

3 DIMENSIONING AND TOLERANCING. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

4 HARDNESS. 49 HRC, MAX

5 THREADS. THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879

6 SURFACE TEXTURE. SURFACE TEXTURE UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI/ASME B46 1

7 LUBRICANT. DRY FILM LUBRICANT APPROVED IN ACCORDANCE WITH MIL-N-25027 NON-DRY FILM LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN MIL-S-8802

(F) 8 EDGES Break all sharp edges and remove all burrs

9 COUNTERBORE/COUNTERSINK. ON SIZE 164 AND LARGER COUNTERBORE THREAD "D" DIAMETER X 062 DEEP MINIMUM THREAD RELIEF, ON SIZE 138 AND SMALLER COUNTERSINK TO "P" DIAMETER WITHIN THE LIMITS OF D, P AND M

10 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS21047L4K

- L4 — DASH NUMBER
- MS21047 — BASIC MS NUMBER

MS21047L4K INDICATES NUT SELF-LOCKING, PLATE TWO LUG LOW HEIGHT, STEEL 125 KSI Ftu 450°F 250-28UNJF-3B, DRY FILM LUBRICANT COUNTERSUNK OR DIMPLED HOLES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS. THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

5 MS21047 SUPERSEDES AN362, AN366 NAS680 NAS1023 IN PART

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AV NAVY- AS AIR FORCE- 11 DLA- REVIEW 82 USER- CR, MI PROJECT NUMBER 5310-1944	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING, PLATE TWO-LUG, LOW HEIGHT, STEEL, 125 KSI Ftu, 450°F	SPECIFICATION SHEET NUMBER MS21047 1 FEB 94 REV F SUPERSEDING MS21047 E 30 SEPT 87 (SEE NOTE 5) AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release distribution is unlimited		Page 2 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

Form Approved
OMB No 0704-0188

INTERCHANGEABILITY RELATIONSHIP

MS21047 NUTS CAN UNIVERSALLY REPLACE AN362 AN366 NAS680 AND NAS1023 NUTS OF LIKE MATERIAL THREAD SIZE LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT) AND FASTENING METHOD (PLAIN RIVET HOLES DIMPLED OR COUNTERSUNK RIVET HOLES) BUT THESE AN362, AN366 NAS680, AND NAS1023 NUTS CANNOT UNIVERSALLY REPLACE MS21047 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBER	SUBSTITUTIVE PART NUMBER	CANCELLED PART NUMBER	SUBSTITUTIVE PART NUMBER
NAS1023A04	MS21047L04	NAS1023A5	MS21047L5
NAS1023A04K	MS21047L04K	NAS1023A5K	MS21047L5K
NAS1023AX04	MS21047-04	NAS1023AX5	MS21047-5
NAS1023AX04K	MS21047-04K	NAS1023AX5K	MS21047-5K
NAS1023A06	MS21047L06	NAS1023A6	MS21047L6
NAS1023A06K	MS21047L06K	NAS1023AX6	MS21047-6
NAS1023AX06	MS21047-06	NAS1023A7	MS21047L7
NAS1023AX06K	MS21047-06K	NAS1023AX7	MS21047-7
NAS1023A08	MS21047L08	NAS1023A8	MS21047L8
NAS1023A08K	MS21047L08K	NAS1023AX8	MS21047-8
NAS1023AX08	MS21047-08	NAS1023A9	MS21047L9
NAS1023AX08K	MS21047-08K	NAS1023AX9	MS21047-9
NAS1023A3	MS21047L3	NAS1023A10	MS21047L10
NAS1023A3K	MS21047L3K	NAS1023AX10	MS21047-10
NAS1023AX3	MS21047-3	---	---
NAS1023AX3K	MS21047-3K	---	---
NAS1023A4	MS21047L4	---	---
NAS1023A4K	MS21047L4K	---	---
NAS1023AX4	MS21047-4	---	---
NAS1023AX4K	MS21047-4K	---	---

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS			SUBSTITUTIVE PART NUMBERS
---	---	---	MS21047-04
---	---	NAS680X04K	MS21047-04K
---	---	NAS680A04	MS21047L04
---	---	NAS680A04K	MS21047L04K
AN362F632	AN366F632	---	MS21047-06
---	AN366F632B	---	MS21047-06
---	---	NAS680X06K	MS21047-06K
AN362F832	AN366F832	NAS680A06	MS21047L06
---	AN366F832B	---	MS21047L06
---	---	NAS680A06K	MS21047L06K
AN362F832	AN366F832	---	MS21047-08
---	AN366F832B	---	MS21047-08
---	---	NAS680X08K	MS21047-08K
AN362F832	AN366F832	NAS680A08	MS21047L08
---	AN366F832B	---	MS21047L08
---	---	NAS680A08K	MS21047L08K
AN362F1032	AN366F1032	---	MS21047-3
---	AN366F1032B	---	MS21047-3
---	---	NAS680X3K	MS21047-3K
AN362F1032	AN366F1032	NAS680A3	MS21047L3

CANCELLED PART NUMBERS			SUBSTITUTIVE PART NUMBERS
---	AN366F1032B	---	MS21047L3
---	---	NAS680A3K	MS21047L3K
AN362F428	AN366F428	---	MS21047-4
---	AN366F428B	---	MS21047-4
---	---	NAS680X4K	MS21047-4K
AN362F428	AN366F428	NAS680A4	MS21047L4
---	AN366F428B	---	MS21047L4
---	---	NAS680A4K	MS21047L4K
AN362F524	AN366F524	---	MS21047-5
---	AN366F524B	---	MS21047-5
---	---	NAS680X5K	MS21047-5K
AN362F524	AN366F524	NAS680A5	MS21047L5
---	AN366F524B	---	MS21047L5
---	---	NAS680A5K	MS21047L5K
AN362F624	AN366F624	---	MS21047-6
---	AN366F624B	---	MS21047-6
AN362F624	AN366F624	NAS680A6	MS21047L6
---	AN366F624B	---	MS21047L6
---	---	NAS680A7	MS21047L7

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AV NAVY- AS AIR FORCE- 11 DLA- REVIEW 82 USER CR, MI PROJECT NUMBER 5310-1944	MILITARY SPECIFICATION SHEET TITLE NUT, SELF-LOCKING, PLATE, TWO-LUG, LOW HEIGHT, STEEL 125 KSI Flu 450°F	SPECIFICATION SHEET NUMBER MS21047 1 FEB 94 REV F SUPERSEDING MS21047 E 30 SEPT 87 (SEE NOTE 5) AMSC- N/A FSC 5310
DISTRIBUTION STATEMENT A. Approved for public release distribution is unlimited		Page 3 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.