
INCH-POUND
MS21251G
15 August 1997
Superseding
MS21251F
27 April 1995

MILITARY SPECIFICATION SHEET

TURNBUCKLE BODY, CLIP LOCKING

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-DTL-8878.

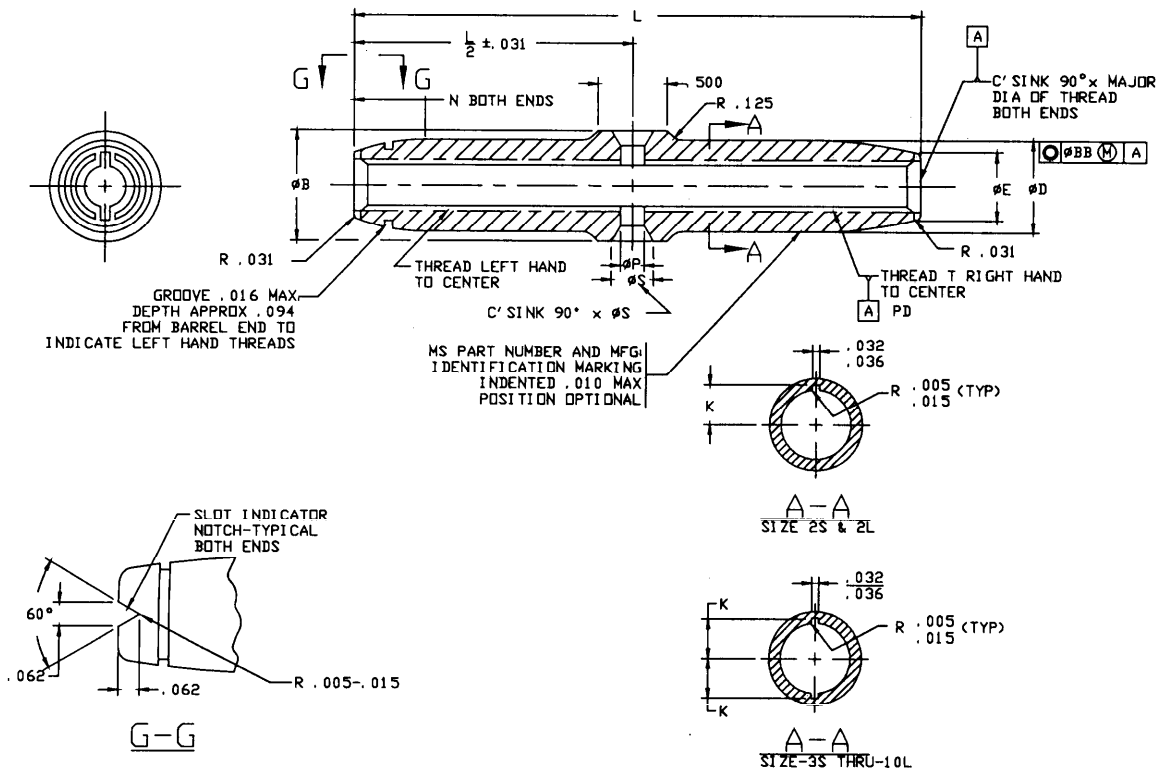

(G) Entire document revised

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is limited.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

DASH NO.			WIRE ROPE DIA REF	MINIMUM BREAKING STRENGTH LB	THREAD T UNF-3B	L ±.031	ØB ±.005	N ±.031	ØD ±.005	ØE ±.005	K		ØS	ØP ±.005	ØBB	APPLI-CABLE LOCKING CLIP MS21256
STEEL	BRASS	AL									MIN.	MAX.				
2S	B2S	A2S	.062 (1/16)	800	.1380 (#6)-40	2.250	.250	.156	.219	.188	.0749	.0807				-1
2L	B2L	A2L				4.000										-2
3S	B3S	A3S	.093 (3/32)	1600	.1900 (#10)-32	2.250	.344	.188	.281	.250	.1009	.1048				-1
3L	B3L	A3L				4.000									.010 FIM	-2
5S	B5S	A5S	.156 (5/32)	3200	.2500 (1/4)-28	2.250	.438	.312	.391	.328	.1294	.1334	.187	.125		-1
5L	B5L	A5L	1/			4.000										-2
6S	B6S	A6S	.187 (3/16)	4600	.3125 (5/16)-24	2.250	.500	.375	.438	.406	.1587	.1627				-1
6L	B6L	A6L				4.000										-2
8L	B8L	A8L	.250 (1/4)	8000	.3750 (3/8)-24		.625	.500	.594	.469	.1900	.1939			.015 FIM	-2
9L	B9L	A9L	.281 (9/32)	12750	.4375 (7/16)-20	4.250	.750	.594	.688	.563	.2185	.2225				
10L	B10L	A10L	.312 (5/16)	17500	.5000 (1/2)-20		.875	.656	.813	.625	.2498	.2537	.250	.188		-3

1/ See note 5.

REQUIREMENTS:

1. Material and protective treatment: See MIL-DTL-8878.

2. Finish: Surface finish shall be RMS 125 or better.

3. Threads: Threads shall be in accordance with FED-STD-H28/20.

4. Barrels shall be marked with the year of manufacture.

5. Marking by impression stamping (or any other stress inducing method), if used, shall be done before stress relieving.

6. Part number: Part Identifying Number (PIN) shall consist of the basic MS number, followed by a dash number, first letter following dash number indicates material, second number refers to the size, letter following size indicates length (short or long).

Example of part number: MS21251-B5L-barrel, turnbuckle, brass, .2500 (1/4)-28 thread, long.

7. Tolerances: Unless otherwise specified, tolerances: decimals ±.010, angles ± 3° .

NOTES:

1. Dimensions are in inches.

2. Remove burrs and break sharp edges (see procurement specification for definition).

3. Interpret drawing in accordance with ASME Y14.5M.

4. For clip locking of terminals and turnbuckles see MS33736.

5. For .125 (1/8) inch diameter wire rope use -5 parts, minimum breaking strength 2200 lb (ref).

6. A turnbuckle with a manufacturing date of 1978 or older shall not be used for replacement repairs since stress relieving was not required prior to this date.

7. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence.

8. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST

Custodians:
Army - AV
Navy - AS
Air Force – 99

Review activities:
Navy – MC
Air Force 11, 82

Preparing Activity:
DLA-IS

(Project 5340-2419)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.