FED. SUP CLASS
4730

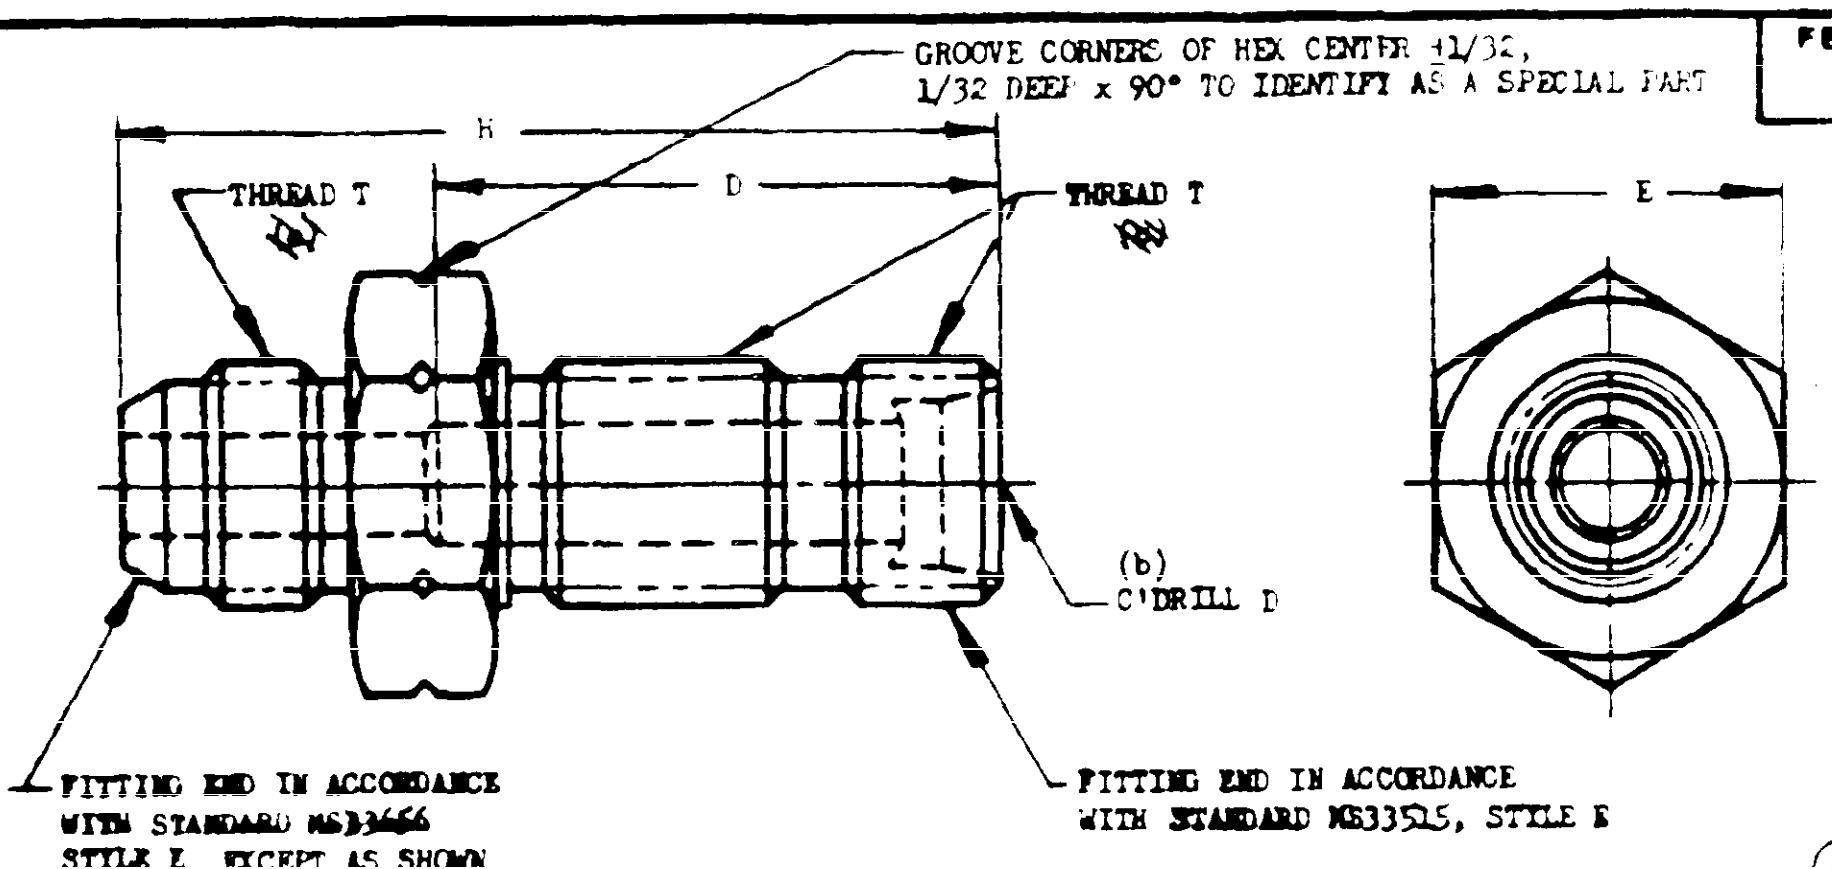
GROOVE CORNERS OF HEX CENTER ±1/32, 1/32 DEEP x 90° TO IDENTIFY AS A SPECIAL PART
H
D
E
THREAD T
THREAD T
(b) C'DRILL D
FITTING END IN ACCORDANCE WITH STANDARD MS33656 STYLE E, EXCEPT AS SHOWN
FITTING END IN ACCORDANCE WITH STANDARD MS33515, STYLE E

Ⓒ

DASH NO.	TUBE OD	THREAD T MIL-S-8879	H	(a) E REF	D ±1/32	WT LB MAX STEEL	WT LB MAX ALUMINUM ALLOY	WT LB MAX TI ALLOY
-2	1/8	.3125-24 UNJF-3A	1-17/32	9/16	15/16	.032	.012	.018
-3	3/16	.3750-24 UNJF-3A	1- 5/8	5/8	THRU	.047	.017	.027
-4	1/4	.4375-20 UNJF-3A	1- 3/4	11/16	1-3/32	.062	.023	.035
-5	5/16	.5000-20 UNJF-3A	1-25/32	3/4	THRU	.082	.031	.047
-6	3/8	.5625-18 UNJF-3A	1-57/64	13/16		.094	.036	.054
-8	1/2	.7500-16 UNJF-3A	2-1/8	1	1-11/32	.172	.065	.099
-10	5/8	.8750-14 UNJF-3A	2-3/8	1-1/8	1-15/32	.244	.089	.140
-12	3/4	1.0625-12 UNJ-3A	2-21/32	1-3/8		.391	.143	.225
-16	1	1.3125-12 UNJ-3A	2-11/16	1-5/8	1-19/32	.533	.195	.307
-20	1-1/4	1.6250-12 UNJ-3A	2-47/64	1-7/8		.784	.288	.452
-24	1-1/2	1.8750-12 UNJ-3A	2-7/8	2-1/8		.972	.356	.560
-32	2	2.5000-12 UNJ-3A	3-9/16	2-3/4	2			

(a) FOR HEX DIMENSIONS AND TOLERANCES, USE MS33515, STYLE E.
(b) C'DRILL IS ONLY FROM THE END OF THE LARGER DRILL. AT THE OPTION OF THE MANUFACTURER, THE SMALLER DIA MAY BE DRILLED THROUGH THE FITTING FROM END TO END.
Ⓒ ~~(c) PARTS WITH THREADS IN ACCORDANCE WITH MIL-S-7742 OF THE SAME THREAD SIZE, PITCH AND TOLERANCE CLASS ARE ACCEPTABLE FOR PROCUREMENT UNTIL 1 JULY 1971. BUT PARTS WITH MIL-S-7742 THREADS WILL NOT BE PROCURED THEREAFTER. EXISTING STOCKS ARE TO BE USED UNTIL EXHAUSTED.~~

1. MATERIAL: CARBON STEEL - BARS
   ALUMINUM ALLOY - BARS
   CORROSION RESISTANT STEEL - BARS
   Ⓒ TITANIUM ALLOY - BARS
   } SEE PROCUREMENT SPECIFICATION
2. FINISH: SEE PROCUREMENT SPECIFICATION.
3. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, ANGLES ±1/2°.
5. PART NUMBERS:
   NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.
   ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (2024)
   ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075)
   ~~ADD C AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 302, 303, 304, 316 OR 321.~~
   ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.
   ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.
   ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE ~~304L AND~~ 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 27 JUNE 1969.
   Ⓒ ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V)

EXAMPLE OF PART NUMBERS:
MS21923-4 = ADAPTER, 1/4 TUBING, CARBON STEEL.
MS21923D4 = ADAPTER, 1/4 TUBING, ALUMINUM ALLOY (2024)
MS21923W4 = ADAPTER, 1/4 TUBING, ALUMINUM ALLOY (7075)
MS21923J4 = ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
MS21923K4 = ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
MS29123-4S = ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
Ⓒ MS29123-4T = ADAPTER, 1/4 TUBING, TITANIUM ALLOY (6AL-4V)

Ⓒ DENOTES CHANGES

User activities: NAVY - OS
ARMY - GI, CR, ME, AT

Review activities: USAF - 11
ARMY - AR, MI
DLA - CS

APPROVED 2 May 56 REVISED Ⓐ 27 May 57 Ⓑ 27 June 69 Ⓒ 26 JUNE 1982

P.A. NAVY - AS Other Cust USAF - 99 Army-AV	INTERNATIONAL INTEREST SEE NOTE 7	TITLE ADAPTER, FLARELESS TUBE, BULKHEAD AND UNIVERSAL TO FLARED TUBE	**MILITARY STANDARD** **MS21923**
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES:	SHEET 1 OF 2

PROJECT NO. 4730-0163

DD FORM 1 SEP 58 672-1 (Coordinated)
AF use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:41Z
Check the source to verify that this is the currentversion before use.

USER SYMBOLS:
NAVY - OS
ARMY - GL, CR, ME, AT

REVIEWER SYMBOLS:
USAF - 11
ARMY - AR, MI
DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
4730

Ⓒ 6. ~~PARTS CODED C ARE INACTIVE FOR DESIGN AFTER 27 JUNE 1969. PARTS CODED C MAY BE USED UNTIL STOCKS ARE EXHAUSTED. PARTS CODED J OR K MAY BE USED IN LIEU OF PARTS CODED C.~~

Ⓒ ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED J, K, OR S (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

7. CERTAIN PROVISIONS (SCREW THREADS, HEXAGON SIZE AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

Ⓒ 8. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

REVISED Ⓒ FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED

P.A. NAVY - AS Other Cust USAF-99 Army-AV	INTERNATIONAL INTEREST SEE NOTE 7	TITLE ADAPTER, FLARELESS TUBE, BULKHEAD AND UNIVERSAL TO FLARED TUBE	MILITARY STANDARD MS21923
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES:	SHEET 2 OF 2

PLATE NO. [illegible]

DD FORM 1 MAR 77 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—[illegible]/6712

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:41Z
Check the source to verify that this is the current version before use.