


USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 1670

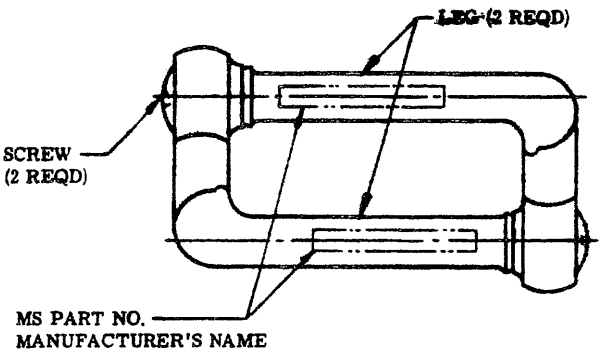




LINK ASSEMBLY -1 & -2
(SEE NOTE 13)

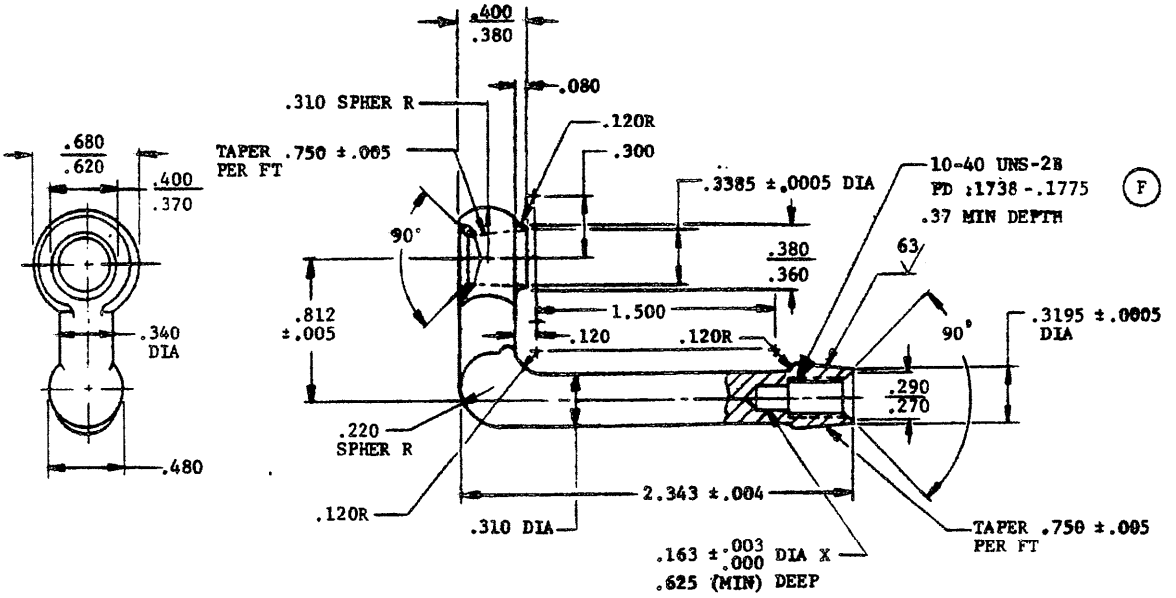

LEG -3 & -4

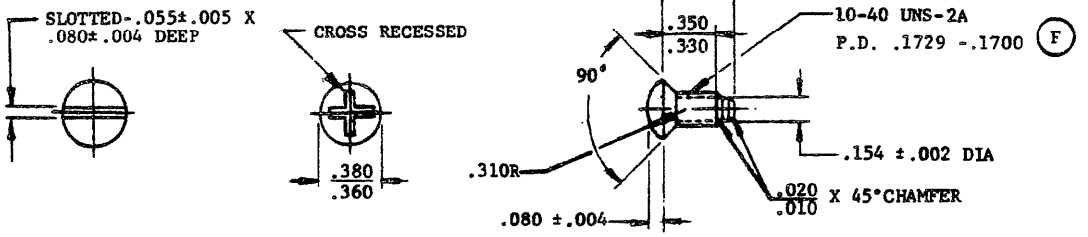

F SCREW -7 & -8

FOR DIM'S NOT SHOWN SEE SCREW -5 & -6

SCREW -5 & -6

F

ASSY PART NO.	LEG	SCREW, CROSS RECESSED	SCREW, SLOTTED SEE NOTE 12
-1 (CAD. PL.)	-3	-5 SEE NOTE 11	-7
-2 (PHOSPHATE)	-4	-6	-8

F DENOTES CHANGES

APPROVED 20 AUG 52 REVISED F 19 OCT 1984

P.A. NAVY — AS Other Cust
AF - 99
ARMY - GL

INTER-NATIONAL INTEREST *

TITLE: LINK, REMOVABLE CONNECTOR PARACHUTE & BARRICADE

MILITARY STANDARD
MS22002

PROCUREMENT SPECIFICATION: MIL-H-7195

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Cont'd)

PROJECT NO. 1630-0680

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:43Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL: LEGS AND SCREWS, STEEL, MIL-S-5626, MIL-S-6049 OR STEEL 4037H AS PER FED-STD-66.
2. METHOD OF FORMING: LEG, HOT FORGE.
3. (F) THREADS: THREADS SHALL CONFORM TO REQUIREMENTS OF FED-STD-H28.
4. HEAT TREATMENT: HEAT TREAT LEG AND SCREW 170,000 TO 190,000 LBS/SQ IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.
5. (F) FINISH: -3, LEG, CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE II.
   -5 AND -7, SCREW, CADMIUM PLATE, QQ-P-416, CLASS 3, TYPE II.
   -4, LEG, -6 AND -8, SCREW, PHOSPHATE COAT, MIL-P-16232, TYPE Z, CLASS 4B, FOLLOWED BY WAX EMULSION, MIL-W-3688.
6. REMOVE ALL BURRS AND SHARP EDGES.
7. SURFACE TEXTURES UNLESS OTHERWISE SPECIFIED, SHALL BE 125√ MAX IN ACCORDANCE WITH ANSI B46.1.
8. LINKS SHALL BE SUBJECTED TO THE PROOF LOAD SPECIFIED HEREON, AS INDICATED BY ARROWS, IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION (SEE NOTE 9).
9. BEFORE PROOF LOAD, EACH SCREW SHALL BE SEATED AND TORQUED TO 5 IN./LB. ± 1/2 IN./LB. THIS SHALL BE PERMITTED ONE TIME ONLY. AFTER PROOF LOAD TEST, SCREWS SHALL BE LOOSENED AND SEATED TO FINGER TENSION FOR SHIPMENT OF THE ASSEMBLY.
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES: DECIMALS, ±.030, ANGLES, ± 1°.
11. WHEN PROCUREMENT IS FOR BARRICADE APPLICATION NO ALTERNATES WILL BE ACCEPTABLE.

* CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 44/15B. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

12. (F) FOR ARMY PROCUREMENTS SLOTTED SCREWS SHALL BE FURNISHED.
13. (F) CRITICAL ASSEMBLY FEATURE:
    (a) MUST ACCEPT A MINIMUM OF SIX (6) FULL TURNS OF SCREW WHEN FULLY ASSEMBLED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 20 AUG 52 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2 (F) FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY-AS Other Cust AF-99 ARMY-GL	INTERNATIONAL INTEREST *	TITLE: LINK, REMOVABLE CONNECTOR PARACHUTE & BARRICADE	MILITARY STANDARD MS22002
PROCUREMENT SPECIFICATION MIL-H-7195		SUPERSEDES	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO. 22086

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:43Z
Check the source to verify that this is the current version before use.