THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SH D THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS IFIED IN TH TATION: MIL-R-25410

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE RTMENT OF DEFENSE

FORM APPROVED
OMB NO. 0704-0188

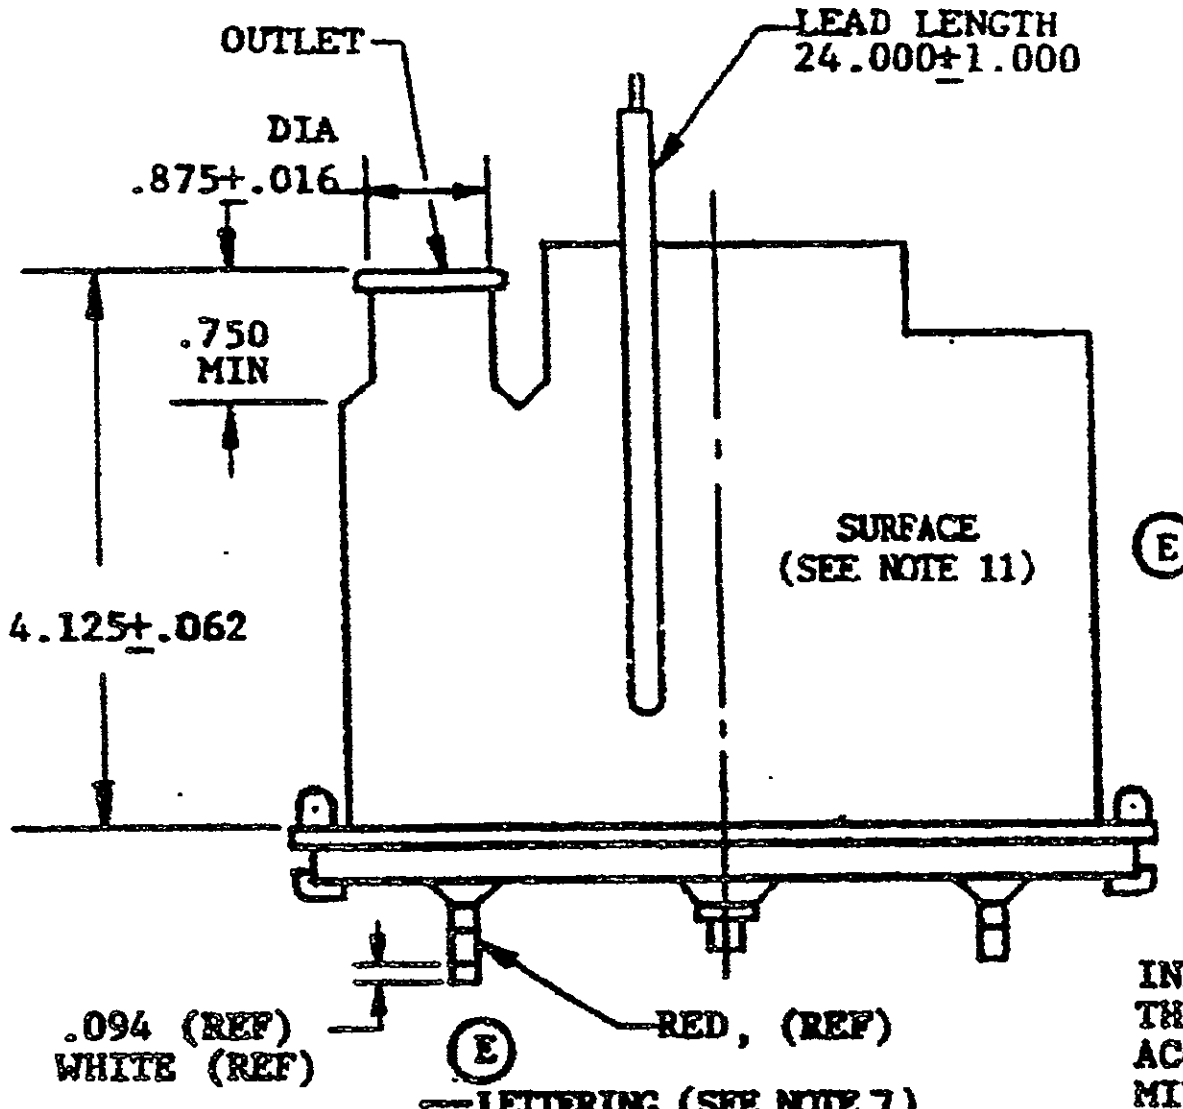

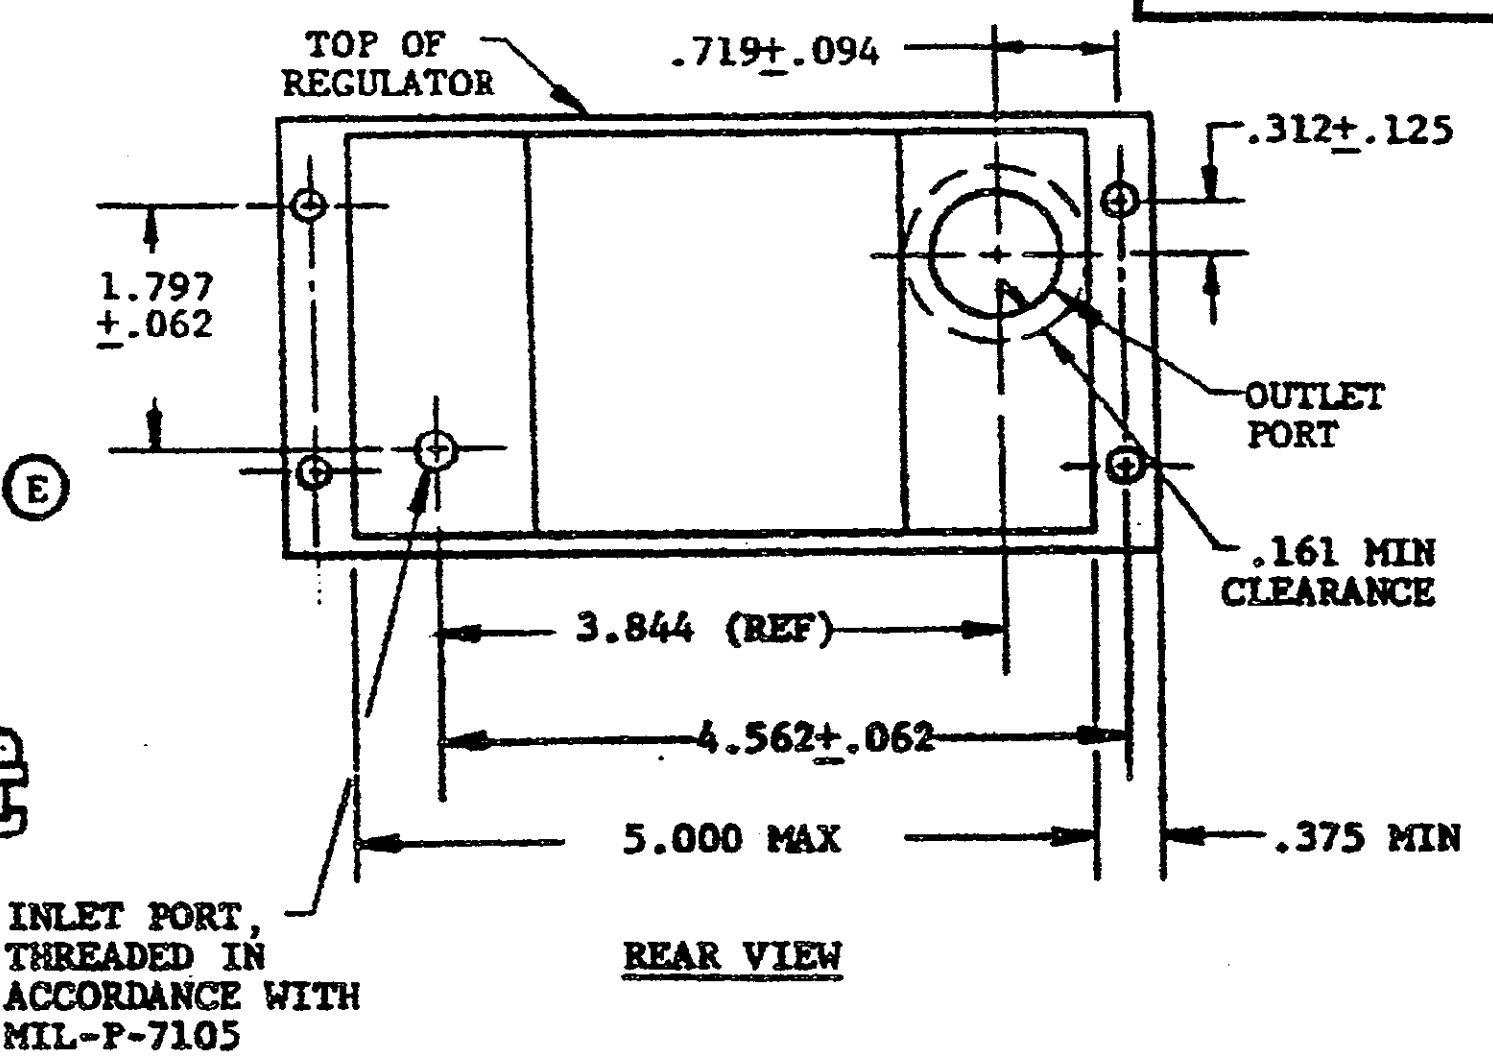

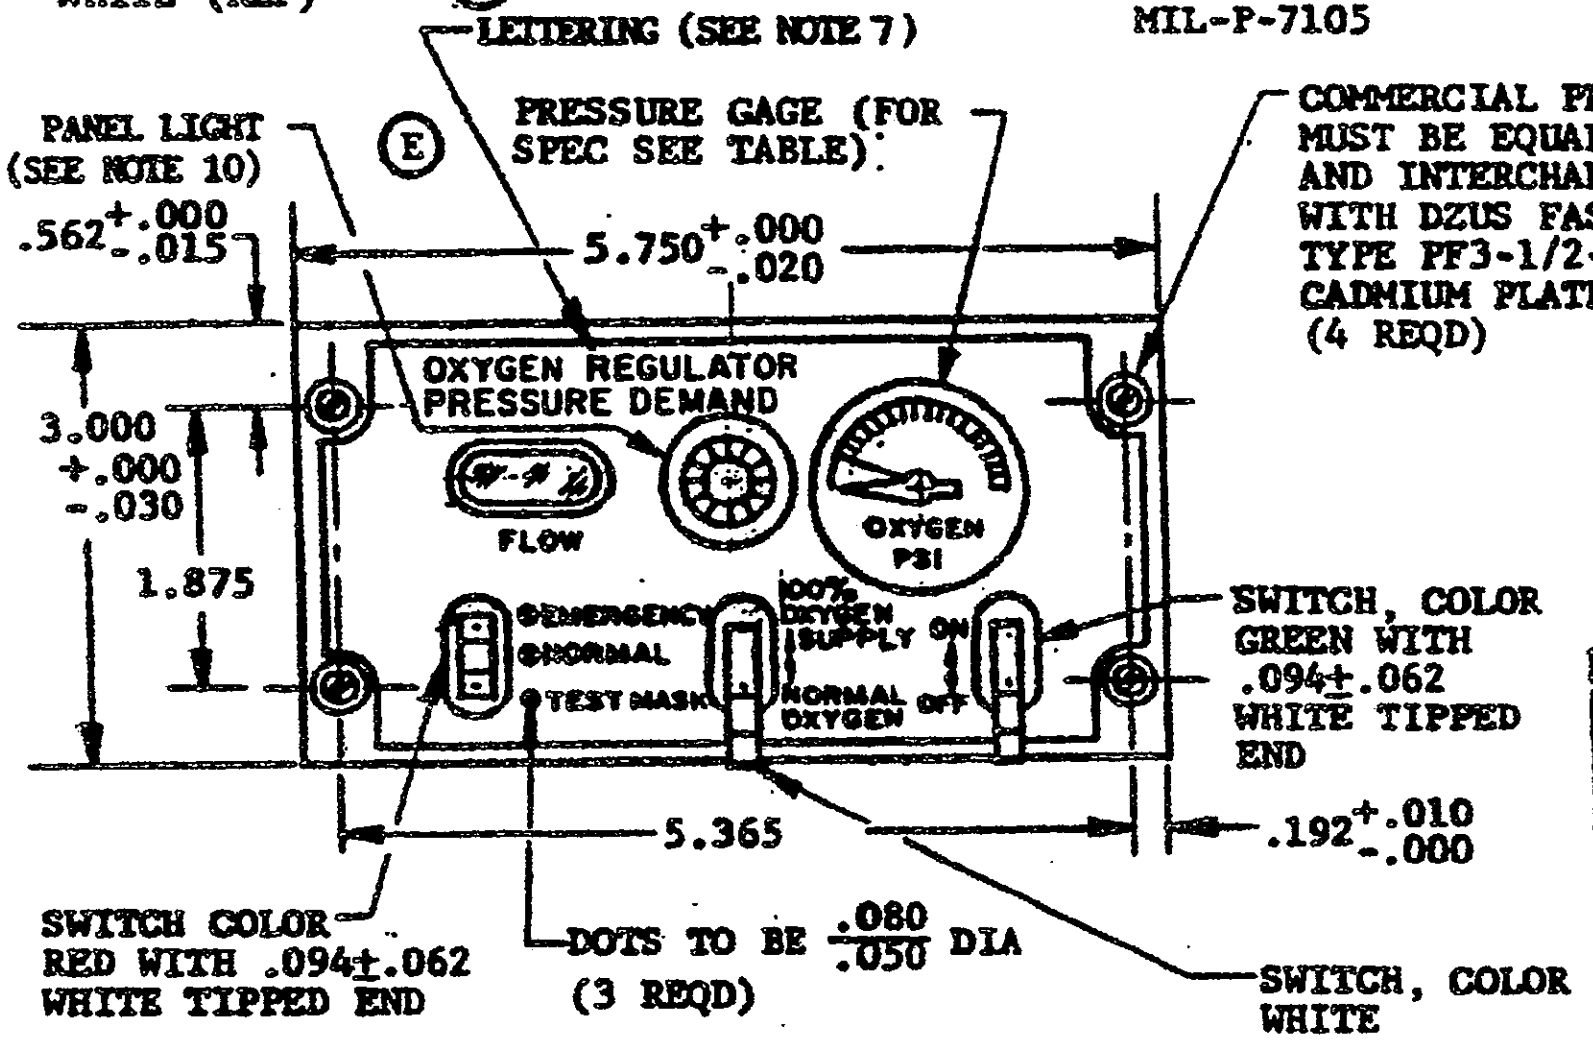

LETTERING (SEE NOTE 7)
PANEL LIGHT (SEE NOTE 10)
E
PRESSURE GAGE (FOR SPEC SEE TABLE)
COMMERCIAL PRODUCT MUST BE EQUAL TO AND INTERCHANGEABLE WITH DZUS FASTENER TYPE PF3-1/2-38 CADMIUM PLATED (4 REQD)
.562 +.000 -.015
5.750 +.000 -.020
3.000 +.000 -.030
1.875
OXYGEN REGULATOR PRESSURE DEMAND
FLOW
OXYGEN PSI
EMERGENCY
NORMAL
TEST MASK
100% OXYGEN
SUPPLY
ON
OFF
NORMAL OXYGEN
SWITCH, COLOR GREEN WITH .094±.062 WHITE TIPPED END
5.365
.192 +.010 -.000
SWITCH COLOR RED WITH .094±.062 WHITE TIPPED END
DOTS TO BE .080/.050 DIA (3 REQD)
SWITCH, COLOR WHITE

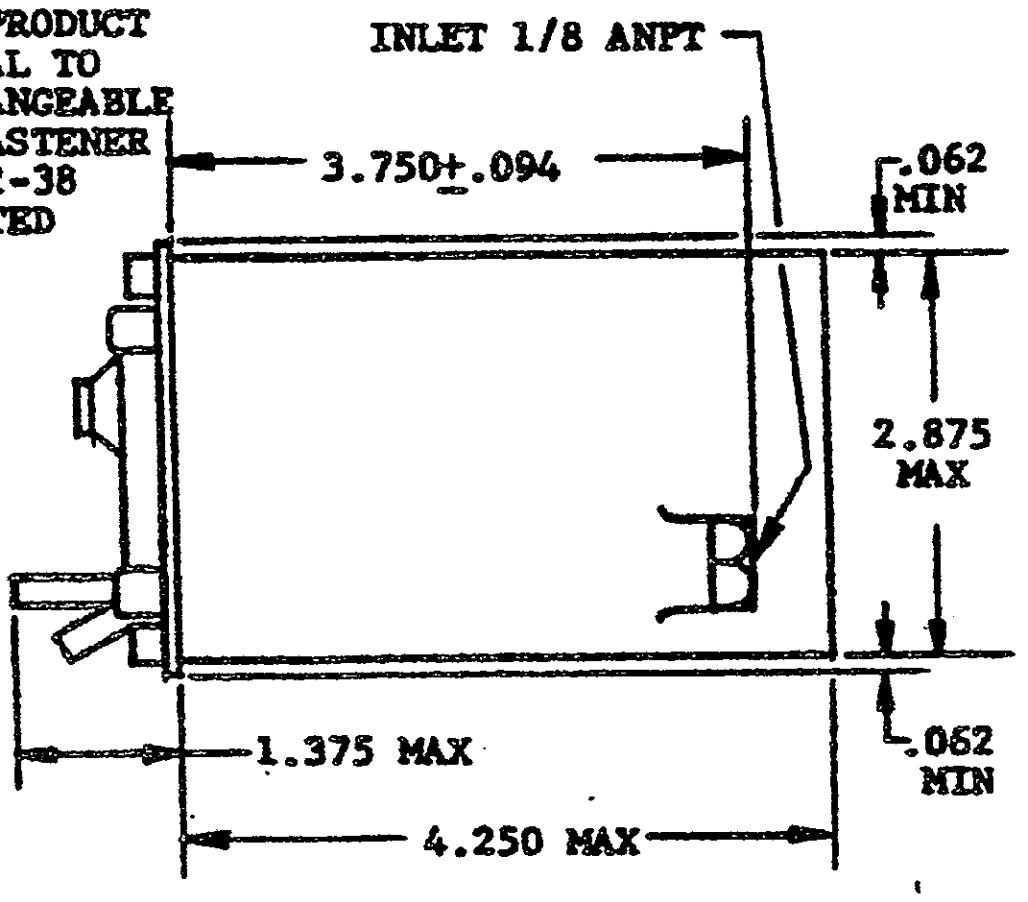

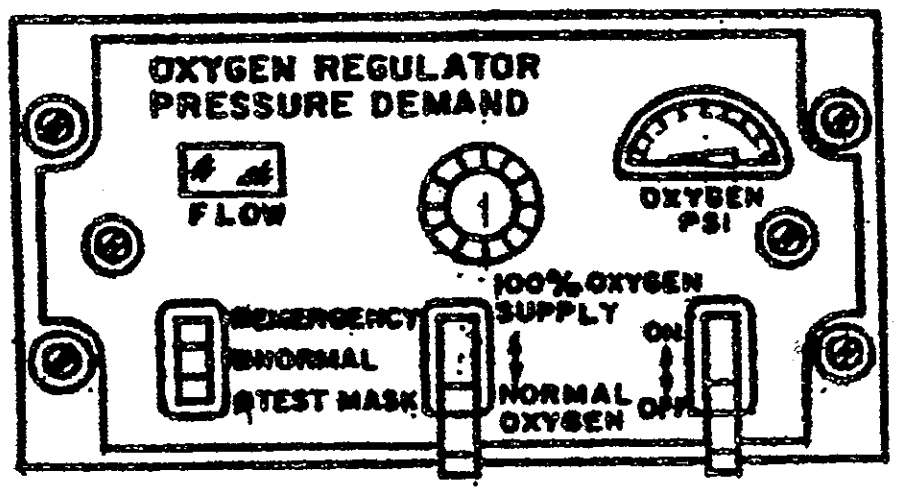

OPTIONAL PANEL CONFIGURATION

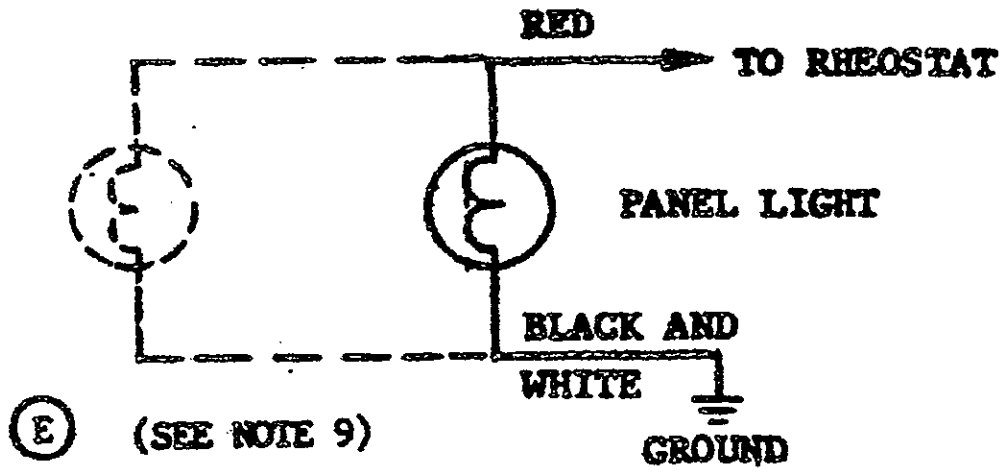

CIRCUIT

(SEE NOTE 9)

E

DASH NO.	TYPE	PRESSURE GAGE SPECIFICATION	PANEL LETTERING	PANEL FINISH
-8	CRU-96/A	MIL-G-25507	SEE NOTE 7	SEE NOTE 8
-9	CRU-97/A	MIL-G-25520	SEE NOTE 7	SEE NOTE 8

E DENOTES CHANGE

PREPARING ACTIVITY: NAVY — AS
CUSTODIANS: ARMY — AV NAVY —
AIR FORCE — DLA —
REVIEW: ARMY-AV, NAVY-AS
USER:
PROJECT NUMBER: 1660-0613

MILITARY SPECIFICATION SHEET

TITLE

REGULATOR, OXYGEN, DILUTER DEMAND, AUTOMATIC, PRESSURE BREATHING

SPECIFICATION SHEET NUMBER
MS22062 1 APR 91 REV F

SUPERSEDING
MS22062E 28 SEP 73

AMSC — N/A FSC 1660

DISTRIBUTION STATEMENT
A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FORM APPROVED
OMB NO. 0704-0188

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.
2. PANEL DIMENSIONS SHALL CONFORM TO MS25212.
3. COLOR CODING OF THE OXYGEN SUPPLY VALVE AND EMERGENCY PRESSURE CONTROL PERMITTED, SUBJECT TO PRIOR APPROVAL OF THE QUALIFYING AGENCY.
4. REGULATORS UTILIZING PRESSURE GAGE IN ACCORDANCE WITH MIL-G-25520 SHALL HAVE AN INLET PRESSURE OF 50 TO 500 PSI.
5. REGULATORS UTILIZING PRESSURE GAGE IN ACCORDANCE WITH MIL-G-25507 SHALL HAVE AN INLET PRESSURE OF 50 TO 2000 PSI.
6. PRESSURE GAGE SHALL INDICATE OXYGEN PRESSURE AT ALL TIMES REGARDLESS OF POSITION OF ON-OFF VALVE.

Ⓔ 7. PANEL LETTERING SHALL BE WHITE, APPROXIMATELY MATCHING COLOR NO. 37886 OF FED-STD-595.

Ⓔ 8. PANEL FINISH SHALL BE DURABLE DULL BLACK MATCHING COLOR NO. 37038 OF FED-STD-595.

Ⓔ 9. THE REGULATOR SHALL PROVIDE ELECTRICAL CONTINUITY TO FACILITATE EITHER 6 VOLT OR 28 VOLT CIRCUITRY.

Ⓔ 10. THE LAMP WILL NOT BE INSTALLED BY THE MANUFACTURER AS PART OF THE REGULATOR.

Ⓔ 11. NON-EXPOSED SURFACES OF REGULATOR WHEN INSTALLED, SHALL BE FINISHED IN ACCORDANCE WITH MIL-A-8625 OR MIL-C-5541.

Ⓔ 12. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

Ⓔ 13. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

PREPARING ACTIVITY: NAVY — AS
CUSTODIANS: ARMY — AV NAVY —
AIR FORCE — DLA —
REVIEW: ARMY-AV, NAVY-AS
USER:
PROJECT NUMBER: 1660-0613

MILITARY SPECIFICATION SHEET

TITLE

REGULATOR, OXYGEN, DILUTER DEMAND,
AUTOMATIC, PRESSURE BREATHING

SPECIFICATION SHEET NUMBER
MS22062 1 APR 91
REV F

SUPERSEDING
MS22062E 28 SEP 73

AMSC — N/A FSC 1660

DISTRIBUTION STATEMENT
A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.