


FED. SUP CLASS
5340

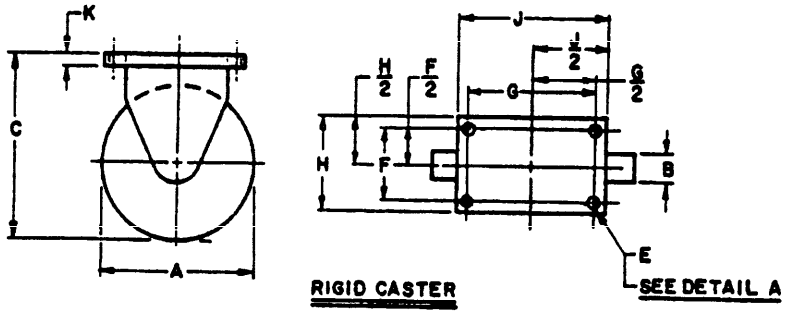

RIGID CASTER

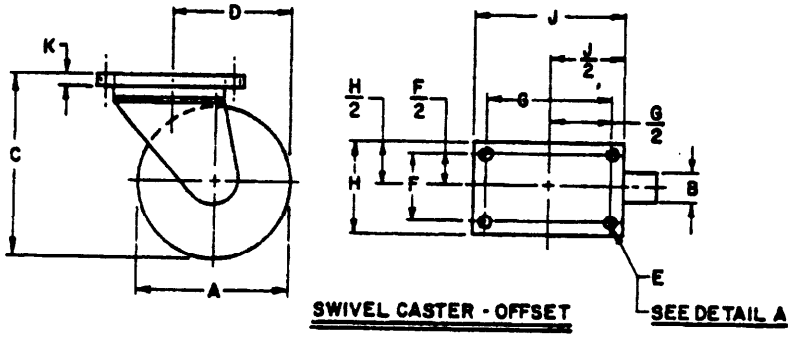

SWIVEL CASTER - OFFSET

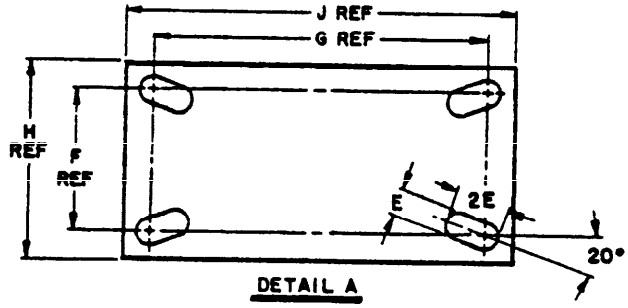

DETAIL A

ALTERNATE TOP PLATE FOR RIGID AND SWIVEL CASTER

DIMENSIONS IN INCHES.
FOLLOWING NOTES APPLY TO MS PART NO. TABLE (SEE SHEET 2):
(a) DASH NUMBERS -4, -6, -8, -10 & -12 DESIGNATE THE WHEEL SIZE AS DESIGNATED BY COLUMN "A Wheel Dia"
THE FIRST LETTERS DESIGNATE THE STYLE OF CASTER AS FOLLOWS:
R - RIGID CASTER
S - SWIVEL CASTER
THE SECOND DASH LETTERS DESIGNATE THE WHEEL MATERIAL AS FOLLOWS:
[illegible] - RUBBER TREAD
[illegible] - COMPOSITION WHEEL FOR 4, 6 & 8 INCH SIZES
M - METAL WHEELS
ADDITIONAL DASH LETTERS SHALL BE ADDED, WHEN REQUIRED, TO DESIGNATE THE FOLLOWING:
L - SWIVEL LOCK FOR 4, 6, & 8 INCH SIZES
E - ELECTROSTATICALLY CONDUCTIVE FOR "R" WHEELS IN 4, 6 & 8 INCH SIZES & FOR "M" WHEELS IN THE 4, 6, 8, 10, & 12 INCH SIZES.
H - SHOCK-MOUNTING FOR 8, 10, & 12 INCH SIZES
B - BRAKES INSTALLED
(b) APPLIES ONLY TO SWIVEL CASTERS
(c) OVERALL HEIGHT FOR SHOCK MOUNTED CASTERS SHALL BE MEASURED UNDER RATED LOAD CONDITIONS
EXAMPLE OF PART NO. MS24380-8S1LEH: SIZE 8 WHEEL, SWIVEL STYLE, SWIVEL LOCK, ELECTROSTATICALLY CONDUCTIVE, SHOCK-MOUNTED
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) ENTIRE STANDARD REVISED

APPROVED 29 OCT 57 REVISED (A) 18 MAR 59 (B) 21 MAR 69 (C) 6 OCT 76 (D) 31 MARCH 1983

USER ACTIVITIES: ARMY - AT
NAVY - MC

REVIEWER ACTIVITIES: NAVY - SA
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. AIR FORCE - 82 Other Cust NAVY - AS AIR FORCE - 99	TITLE CASTERS, INDUSTRIAL	MILITARY STANDARD MS 24380
PROCUREMENT SPECIFICATION MIL-C-7474	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-01-20 14:53Z
Check the source to verify that this is the current version before use.

PROJECT 5340-1498

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document

REVIEWER ACTIVITIES: NAVY-SA, DLA-IS

USER ACTIVITIES: ARMY-AT, NAVY-MC

DD FORM 1426 SEP 83 **572-1** (Coordinated)

EDITION OF 1 SEP 67 MAY BE USED.

PROCUREMENT SPECIFICATION: MIL-C-24414

SUPERSEDES:

SHEET

P.A. Air Force - 82

Other Cust: Navy - AS, Air Force - 99

TITLE: CASTERS, INDUSTRIAL

MILITARY STANDARD

MS24380

Ⓓ Entire Standard Revised

(a) MS PART NO.	A WHEEL DIA. (NOM.)	STYLE OF CASTER	WHEEL TREAD MATERIAL	RATED LOAD LBS (MIN)	CASTER WEIGHT MAX (LBS)	B MIN. TREAD WIDTH AT BASE OF TIRE	C (c) OVERALL HEIGHT	D (b) SWIVEL RADIUS MAX.	D (b) SWIVEL RADIUS MIN.	E DIA. OF BOLT HOLES	F BOLT HOLE SPACING	G BOLT HOLE SPACING	H MAX TOP PLATE WIDTH	J MAX TOP PLATE LENGTH	K MAX. TOP PLATE THICKNESS AT BOLT HOLES
						Ⓓ	Ⓓ	Ⓓ		Ⓓ	Ⓓ	Ⓓ	Ⓔ	Ⓓ	Ⓓ
MS24380-4RU	4	RIGID	RUBBER	170	2.8	1.500	±.06 5.250	3.875	3.375	+.015 -.005 .390	±.020 2.625	±.020 3.625	4.125	4.625	.250
MS24380-4SU		SWIVEL			3.6										
MS24380-4RC		RIGID	COMPO-SITION	400	2.8										
MS24380-4SC		SWIVEL			3.6										
MS24380-4RM		RIGID	METAL	400	3.9										
MS24380-4SM		SWIVEL			4.7										
MS24380-6RU	6	RIGID	RUBBER	340	7.2	2.000	±.06 7.375	5.250	4.750	+.015 -.005 .531	±.020 3.375	±.020 5.250	5.125	7.125	.312
MS24380-6SU		SWIVEL			8.8										
MS24380-6RC		RIGID	COMPO-SITION	600	7.2										
MS24380-6SC		SWIVEL			8.8										
MS24380-6RM		RIGID	METAL	600	7.5										
MS24380-6SM		SWIVEL			9.4										
MS24380-8RU	8	RIGID	RUBBER	560	26.0	2.500	±.09 10.250	6.875	6.375	+.015 -.005 .531	±.020 3.375	±.020 5.250	5.375	7.25	.500
MS24380-8SU		SWIVEL			30.0										
MS24380-8RC		RIGID	COMPO-SITION	1200	26.0										
MS24380-8SC		SWIVEL			30.0										
MS24380-8RM		RIGID	METAL	1200	28.0										
MS24380-8SM		SWIVEL			32.0										
MS24380-10RU	10	RIGID	RUBBER	830	53.0	3.000	±.09 12.875	8.750	8.250	+.030 -.007 .656	±.020 7.000	±.020 9.750	9.125	11.125	.625
MS24380-10SU		SWIVEL			63.0										
MS24380-10RC		RIGID	COMPO-SITION	2000	53.0										
MS24380-10SC		SWIVEL			63.0										
MS24380-10RM		RIGID	METAL	2000	58.0										
MS24380-10SM		SWIVEL			68.0										
MS24380-12RU	12	RIGID	RUBBER	950	65.0	3.000	±.09 14.875	10.00	9.500						
MS24380-12SU		SWIVEL			72.0										
MS24380-12RC		RIGID	COMPO-SITION	2500	65.0										
MS24380-12SC		SWIVEL			72.0										

APPROVED 29 OCT 57 REVISED SEE SHEET 1 FOR REVISIONS

FED. SUP CLASS 5340

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:53Z
Check the source to verify that this is the current version before use.