INCH-POUND

MS25024K
22 May 2023
SUPERSEDING
MS25024J
23 March 2017

DETAIL SPECIFICATION SHEET

RELAY, 10 AMP, 4PDT, SEALED, CLASS O

Inactive for new design after 12 August 1964.
For new design, use in
MS24568 dash number D1.

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein
shall consist of this specification sheet and MIL-PRF-6106.

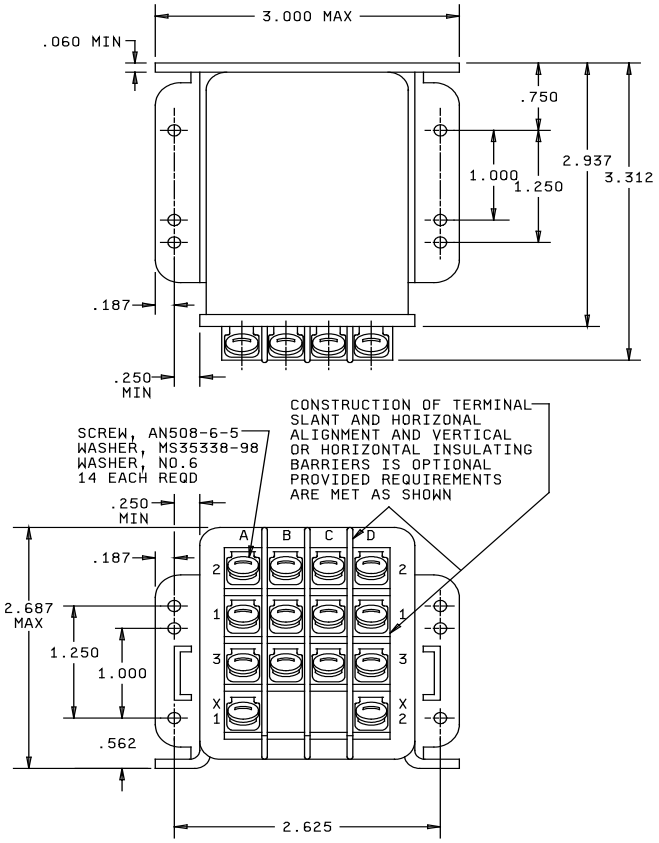



FIGURE 1. Configurations and dimensions.

AMSC N/A

FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

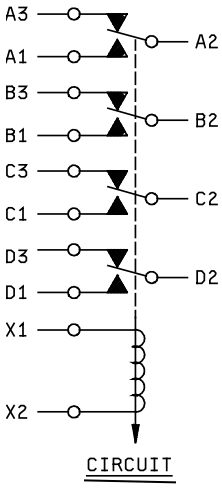

Inches	mm
.005	0.127
.010	0.254
.060	1.524
.562	14.275
.750	19.05
1.000	25.4
1.250	31.75
2.625	66.68
2.687	68.25
2.937	74.60
3.312	84.12

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.254 mm).

FIGURE 1. Configurations and dimensions - Continued.

REQUIREMENTS

Operating cycles: 50,000 minimum.

Contact data:

Contact voltage drop:

Initial: 0.150 volt maximum.

After life: 0.175 volt maximum.

Load ratings: See table I.

TABLE I. - Rated contact load (per pole).

Type of load	Amperes
Resistive (dc)	10
Resistive (ac 400 Hz, 115 volts)	10
Inductive	10
Motor	6
Mixed loads MS25024-2	See MIL-PRF-6106.

Overload current: See MIL-PRF-6106.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

Rupture current: See MIL-PRF-6106.

Coil data:

Nominal coil voltage: 28 volts.

Maximum operating voltage: 29 volts.

Pickup voltage: 18 volts.

Hold voltage: 7 volts.

Dropout voltage: 1.5 volts.

Rated duty: Continuous.

Coil current: 0.35 amperes, maximum.

Physical data:

Weight: 0.8 pounds, maximum.

Qualification by similarity: See MIL-PRF-6106.

Retention of qualification: To retain qualification, the manufacturer shall submit group A acceptance reports every 36 months to the qualifying activity.

Conformance inspection: Performance of groups B and C tests are not applicable.

Part or Identifying Number (PIN): MS25024-2.

Supersession information:

Interchangeability relationship:

MS25024 parts are functionally interchangeable in accordance with MS24568 Dash Number D1 parts.

MS25024 parts are dimensionally interchangeable in accordance with MS24568 Dash Number D1 parts in most cases but not in all cases.

Dimensional interchangeability is determined by the installation and a determination must be made for each different installation.

Part MS25024-2 supersedes MS25024-1.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. This document references the following:

MIL-PRF-6106 MS24568

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2023-038)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.