
FED. SUP CLASS
5935

REVIEW ACTIVITIES: ARMY - MU, ME
USER ACTIVITIES: ARMY - EL, ME; GL; NAVY - MC, YD

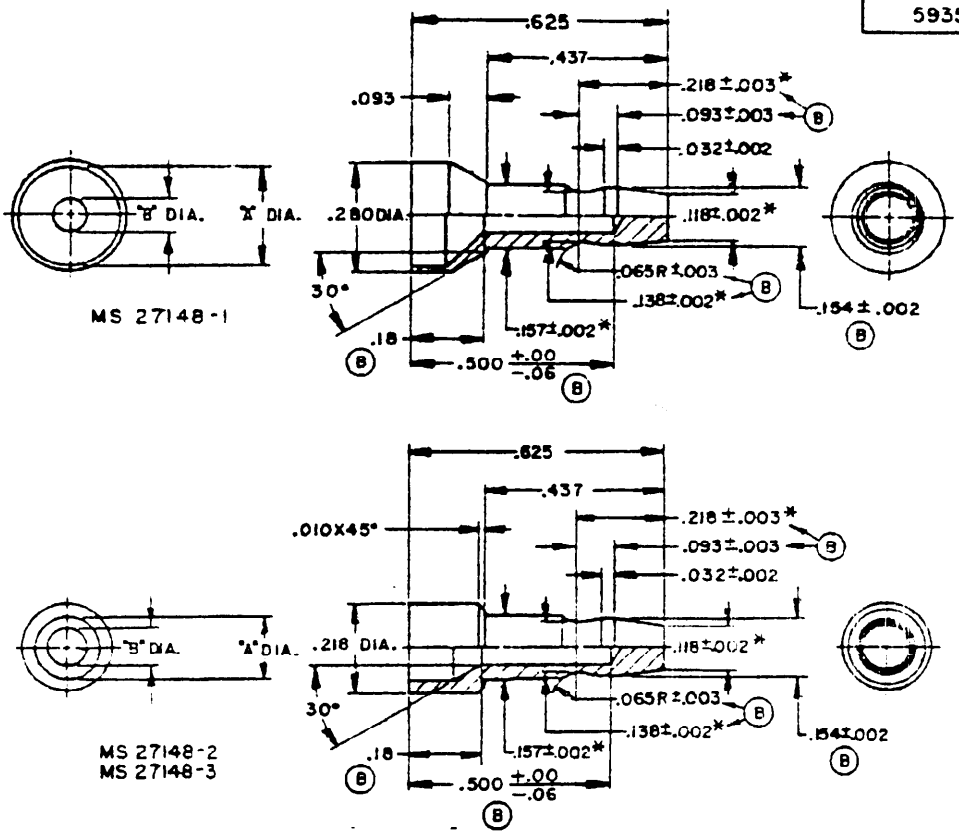

MS PART NO.	FORMER PART NUMBER	WIRE GAGE	"A" DIA ±.002	"B" DIA ±.002
MS 27148-1	572930	12	.252	.098
MS 27148-2	572929	14	.177	.086
MS 27148-3	572931	16	.160	.086

NOTES:

1. MATERIAL: BRASS, COMP. 11 OR 22, TEMPER 1/2 HARD MINIMUM, QQ-B-626.
2. FINISH: SILVER PLATE, TYPE II, QQ-S-365, .0002 MINIMUM THICKNESS.
3. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE (B) ± .007 ON DECIMALS, AND ± 1° ON ANGLES.
4. DIMENSIONS ON SHEET 2 ARE IDENTICAL WITH SHEET 1 EXCEPT ARE EXPRESSED IN MILLIMETERS.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

CERTAIN PROVISIONS OF THIS STANDARD (IDENTIFIED BY *) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO-STANAG 4040. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 11 MAY 1961 REVISED (A) 1 SEPTEMBER 1967 (B) 28 APRIL 1969


This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. ARMY-AT Other Cust	INTERNATIONAL INTEREST STANAG 4040	TITLE CONTACT; PIN, ELECTRICAL CONNECTOR: NO. 12, 14, & 16 A.W.G.	MILITARY STANDARD MS27148
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: DTEX1.1		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

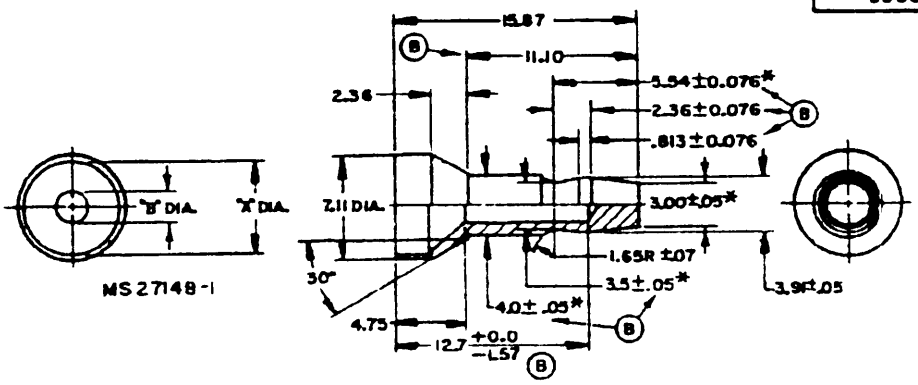

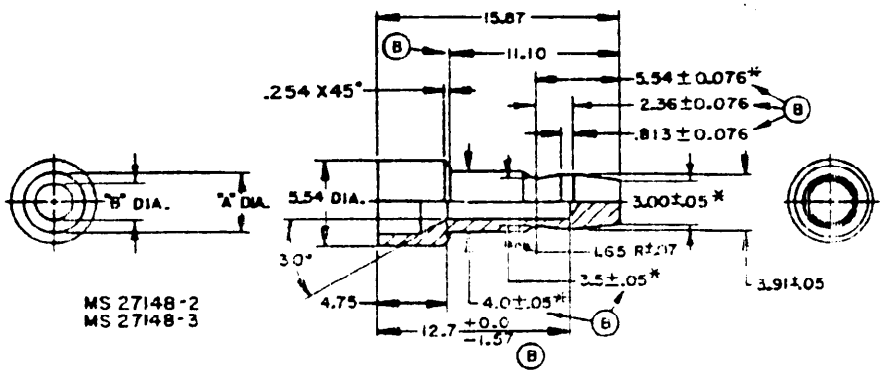

MS PART NO.	FORMER PART NUMBER	WIRE GAGE	"A" DIA ± .05	"B" DIA ± .05
MS 27148-1	572930	12	6.40	2.49
MS 27148-2	572929	14	4.50	2.18
MS 27148-3	572931	16	4.06	2.18

NOTES:
1. MATERIAL: BRASS, COMP. 11 OR 22, TEMPER 1/2 HARD MINIMUM, QQ-B-626.
2. FINISH: SILVER PLATE, TYPE II. QQ-S-365, .0002 MINIMUM THICKNESS.
3. (B) UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE ±.178 ON DECIMALS, AND ± ° ON ANGLES.
4. DIMENSIONS ON SHEET 1 ARE IDENTICAL WITH SHEET 2 EXCEPT ARE EXPRESSED IN INCHES.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

CERTAIN PROVISIONS OF THIS STANDARD (IDENTIFIED BY *) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO-STANAG 4040. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

REVIEW ACTIVITIES: ARMY-MU, ME; AF-85
USER ACTIVITIES: ARMY-EL, ME, GL; NAVY-MC, YD

APPROVED 11 MAY 1961 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.ARMY-AT Other Cust	INTERNATIONAL INTEREST STANAG 4040	TITLE CONTACT; PIN, ELECTRICAL CONNECTOR: NO. 12, 14, & 16 A.W.G.	MILITARY STANDARD MS27148
PROCUREMENT SPECIFICATION NONE		SUPERSEDES DTEX 1.1	SHEET 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.