This military standard has been approved by the Department of the Air Force and is for use by that activity. All other military activities are required to employ this standard where suitable.

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

(ID COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-F319-04

Procurement Specification MIL-C-38999

P.A. AF-85

Other Cust

International Interest

SUPERSEDES:

TITLE CONNECTOR, RECEPTACLE, ELECTRIC, JAM NUT MOUNTING, SOLDER TYPE, HERMETIC SEAL, SERIES II.


MILITARY STANDARD

MS27483(USAF)

SHEET 1 OF 2

FED. SUP CLASS 5935

CANCELED FOR PROCUREMENT USE MS27477

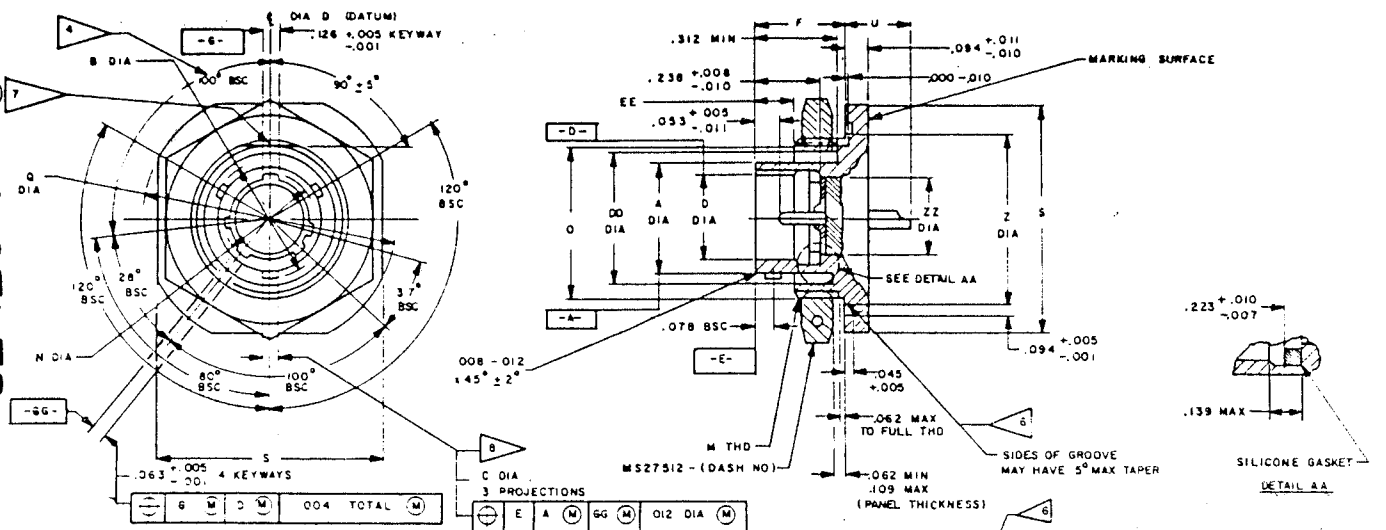

FINISH E CLASS Y STYLE P

SHELL SIZE	A +.001 -.005 DIA	B +.000 -.016 DIA OVER PLT	C +.006 -.002 DIA	B +.005 -.001 DIA	F +.005	M THREAD CLASS 2A UNEF (PLATED)	N +.005 -.006 DIA	O +.001 -.006 FLAT	Q ±.016 DIA	S ±.016	U MAX	Z +.006 -.005 DIA	CC	DD MIN DIA	EE +.005 -.000	ZZ MIN I.D.	RECOMMENDED PACKING ("O" RING)	FOR INSERT ARR. SEE DWG MS	NUT MS27512 DASH NO.
8	.473	.563	.078	.362	.438	7/8-20	.412	.817	1.375	1.250	.281	.965	.004	.678	.140	.403	MS9021-022	27343,27516	-8E
10	.598	.690		.490		1-20	.540	.941	1.500	1.375		1.090	.010	.780		.515	MS9021-024	27344,27517	-10E
12	.723	.859		.607		1 1/8-18	.689	1.065	1.625	1.500		1.215		.963		.629	MS9021-026	27345,27518	-12E
14	.875	.984		.732		1 1/4-18	.814	1.190	1.750	1.625		1.340		1.088		.754	MS9021-028	27346,27519	-14E
16	1.000	1.108		.857		1 3/8-18	.939	1.320	1.938	1.781		1.477		1.222		.879	MS9021-029	27347,27520	-16E
18	1.125	1.233		.962		1 1/2-18	1.039	1.440	2.016	1.890		1.602		1.333		.980	MS9021-030	27348,27521	-18E
20	1.250	1.358	.125	1.087	.464	1 5/8-18	1.164	1.565	2.141	2.016	.250	1.727		1.458	.166	1.105	MS9021-031	27349,27522	-20E
22	1.375	1.483		1.212		1 3/4-18 UNS	1.289	1.690	2.265	2.140		1.852		1.583		1.230	MS9021-032	27350,27523	-22E
24	1.500	1.610		1.337		1 7/8-16 UN	1.414	1.815	2.390	2.265		1.977		1.705		1.355	MS9021-033	27351,27524	-24E

NOTES:
1. DIMENSIONS IN INCHES.
2. DIAMETERS A, D, M, Q AND Z SHALL BE CONCENTRIC WITHIN .005 T.I.R.
3. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N, SHALL BE CONCENTRIC AT MMC.
4. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE FIGURE 6 OF PROCUREMENT SPECIFICATION.


6 RECOMMENDED PACKING IS FOR DIMENSIONS ONLY. MATERIAL IS OPTIONAL.
7 .100 DIAMETER MAXIMUM HOLE MAY BE PRESENT ON FLAT TO FACILITATE CLEANING.
8 THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION

INACTIVE FOR NEW DESIGN AFTER 13 AUG 74

USE MS27477

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

EXAMPLE OF PART NUMBER:

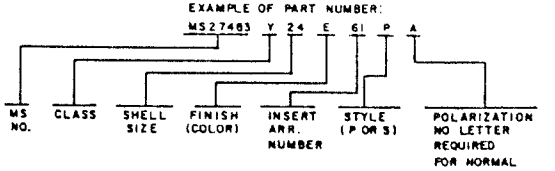

APPROVED 8-SEPT-66 REVISED (E) 13 AUG 74 (F) 17 FEB 88

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T16:41Z
Check the source to verify that this is the current version before use.