INCH-POUND

MS28882G
w/AMENDMENT 1
18 March 2024
SUPERSEDING
MS28882G
27 March 2009

DETAIL SPECIFICATION SHEET

VALVE, FUEL CHECK, LOW PRESSURE, GASKET SEAL STRAIGHT THREAD CONNECTION

Inactive for new design after 15 October 1998.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7899, “Valves, Check, Aircraft Fuel System”.

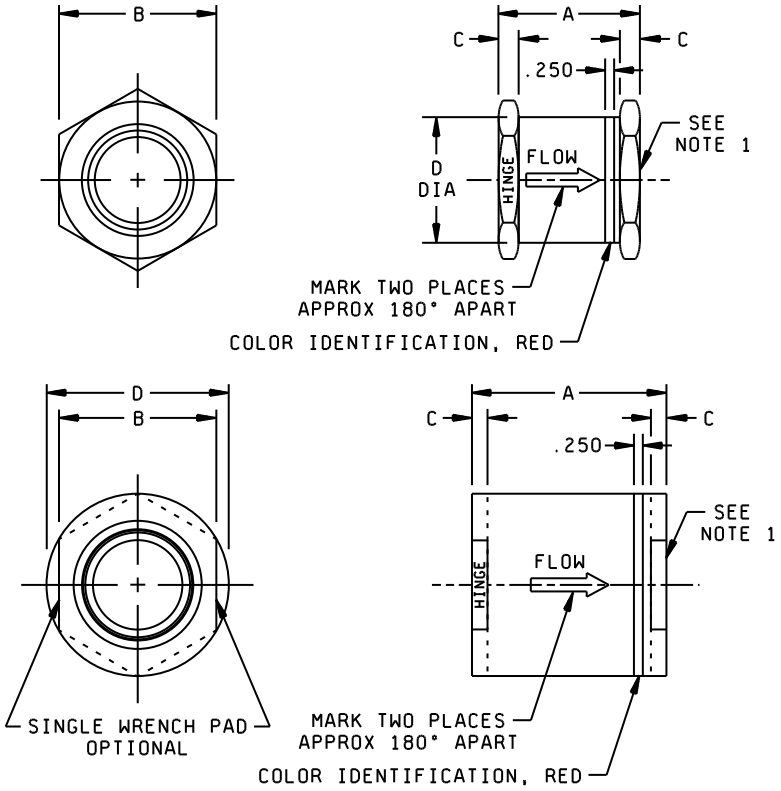


FIGURE 1. Check valve.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for release; Distribution is unlimited.

FSC 4820

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

Dash number size	Tubing O.D. (nominal)		A ±.031 inch (±.787 mm)		B (for tolerances see note 3)		C min		D dia max	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
-4	.250	6.35	2.031	51.587	1.063	27.000	.250	6.350	1.066	27.076
-6	.375	9.525	2.031	51.587	1.063	27.000	.250	6.350	1.066	27.076
-8	.500	12.70	2.344	59.538	1.187	30.150	.250	6.350	1.190	30.226
-10	.625	15.875	2.844	72.238	1.187	30.150	.375	9.525	1.253	31.826
-12	.750	19.050	3.500	88.900	1.500	38.100	.375	9.525	1.503	38.176
-16	1.000	25.40	3.594	91.288	1.812	46.025	.375	9.525	1.820	46.228
-20	1.250	31.75	4.062	103.175	2.500	63.500	.500	12.700	2.508	63.703
-24	1.500	38.10	4.625	117.475	2.750	69.850	.500	12.700	2.758	70.053
-32	2.000	50.80	5.688	144.475	3.125	79.375	.500	12.700	3.500	88.900

NOTES:

1. Ports both ends, bosses in accordance with SAE AS5202, “Port or Fitting End, Internal Straight Thread, Design Standard”.
2. Dimensions are in inches. Millimeters are given for general information only.
3. Tolerances for B dimension are as shown below:

Dash number size	B (tolerance)	B (tolerance)
	Inch	mm
-4, -6, -8,-10, -12	+.003 -.006	(+.076) (-.152)
-16, -20, -24	+.008 -.016	(+.203) (-.406)
-32	+.010 -.000	(+.254) (-.000)

4. The marking “hinge” is applicable only to swing type check valves.
5. Remove all burrs and break sharp edges (.016 inch (.406 mm) maximum).
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
7. For design features, this standard takes precedence over procurement documents referenced herein.
8. Unless otherwise noted, tolerances are ± .010 inch (± .254 mm).

FIGURE 1. Check valve - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

TABLE I. Valve classification.

Class	Low temperature fuel and ambient		High temperature			
			Fuel		Ambient	
A	-55°C	(-67°F)	57°C	(135°F)	71°C	(160°F)
B	-55°C	(-67°F)	94°C	(200°F)	177°C	(350°F)
C	-55°C	(-67°F)	150°C	(300°F)	315°C	(600°F)

REQUIREMENTS

Intended use. These low pressure check valves are suitable for use with hydrocarbon fuels, fuel vapors, and air.

Materials. Materials shall comply to requirements listed in the procurement specification, MIL-DTL-7899.

Finish. Finish shall comply to requirements listed in the procurement specification, MIL-DTL-7899.

Qualification. Check valves furnished under this specification sheet shall be products which are qualified for listing on Qualified Products List, QPL-7899. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://quicksearch.dla.mil or https://assist.dla.mil.

Locking of parts. Threaded parts shall be locked or safe-tied in accordance with National Aerospace Standard NASM 33540, “Safety Wiring, Safety Cabling, Cotter Pinning, General Practices for”. Safety cable is allowed as an alternate to safety wire. Self-locking nuts shall not be used where loosening or disengagement could result in the nut or other parts entering the fuel system. The use of lockwashers or staking is prohibited.

Marking. The valve assembly shall be marked in accordance with MIL-STD-130, “Identification Marking of U.S. Military Property”. The information should contain at least the following:

(1) Valve, Check.

(2) MS part number.

(3) Manufacturer’s part number.


(4) Manufacturer’s name or trade mark.

Valve characteristic: See figure 1.

Valve classification: See table I.

Part or Identifying Number (PIN): The PIN consist of the letters “MS”, the specification number, class letter, style number and dash number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

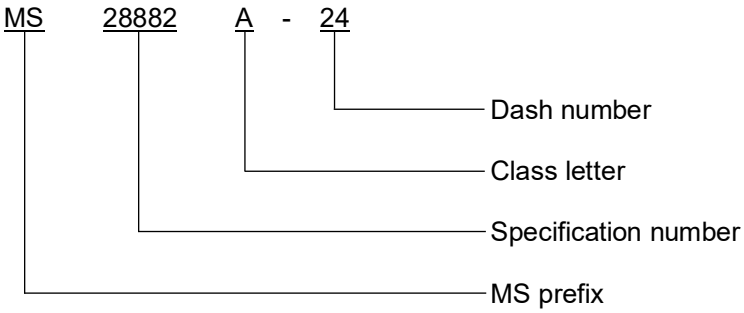

Reference documents. This document references the following:

MIL-DTL-7899, “Valves, Check, Aircraft Fuel System”.
MIL-STD-130, “Identification Marking of U.S. Military Property”.
NASM 33540, “Safety Wiring, Safety Cabling, Cotter Pinning, General Practices for”.
SAE AS5202, “Port or Fitting End, Internal Straight Thread, Design Standard”.

Amendment Notations: The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army – AV
Navy - AS
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4820-2024-002)

Reviewer activities:
Army – CR4, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://quicksearch.dla.mil or https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.