DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy - MC
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Procurement Specification: MIL-C-26482

Other Cust: Navy - AS, AF-85

P.A Army - CR

International interest:

SUPERSEDES: MS3470 (Navy), MIL-C-83723/1B, MIL-C-83723/2B

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, NARROW FLANGE MOUNT, BAYONET COUPLING, CLASSES A, L, S, AND W

(D) "ENTIRE STANDARD REVISED"


MS3470

MILITARY STANDARD


PAGE 1 OF 4


5935-3465-1

FED. SUP CLASS 5935

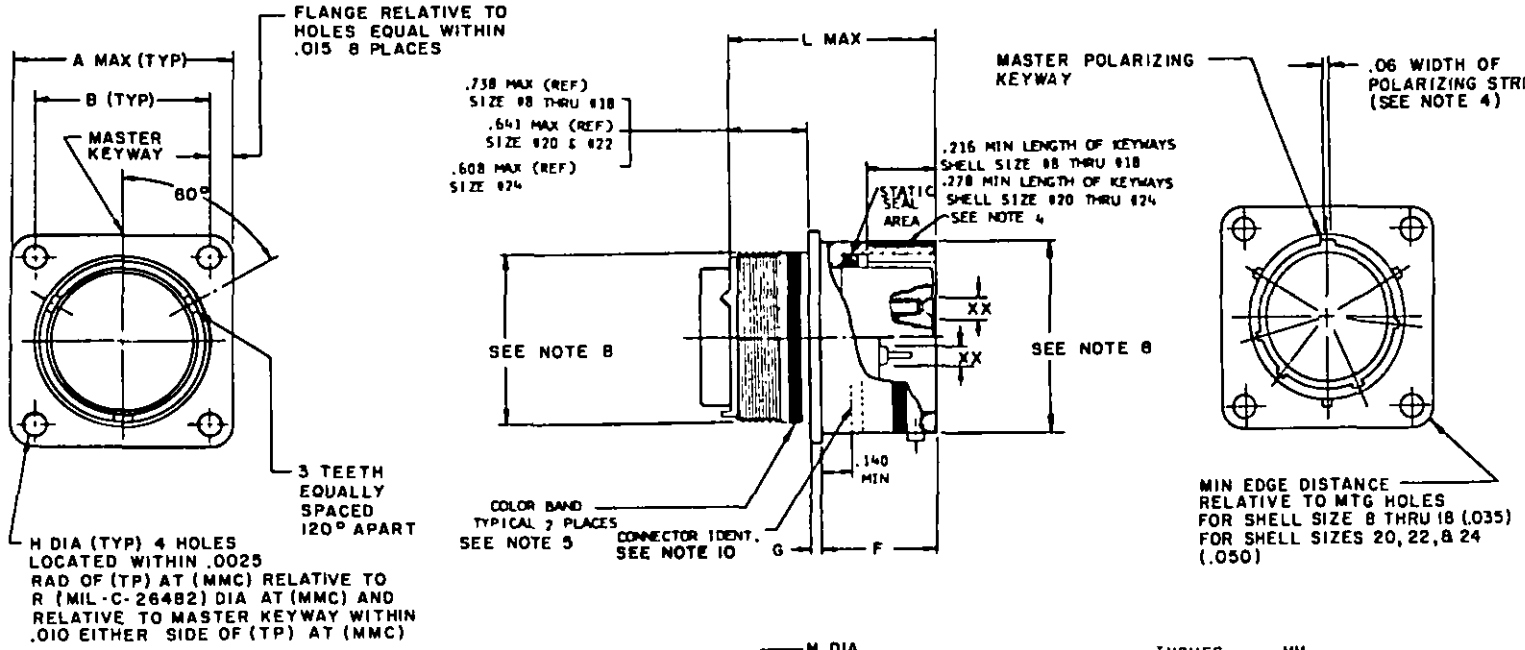


*XX SEE NOTE 8 AND TABLE I FOR CONTACT CAVITIES REQUIRING REDUCED DIMENSION*

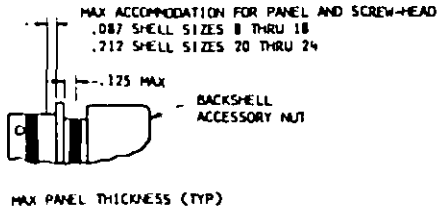

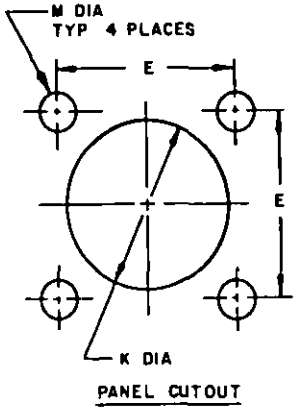

| INCHES | MM |
|---|---|
| .0025 | 0.064 |
| .010 | 0.25 |
| .015 | 0.38 |
| .035 | 0.89 |
| .050 | 1.27 |
| .060 | 1.52 |
| .067 | 1.70 |
| .087 | 2.21 |
| .125 | 3.18 |
| .140 | 3.56 |
| .212 | 5.38 |
| .216 | 5.49 |
| .278 | 7.06 |
| .608 | 15.44 |
| .641 | 16.28 |
| .738 | 18.75 |

APPROVED 1 Apr 71 REVISED (D) 12 Jul 85


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

User activities: Army - AV
Navy - MC
Air Force -


Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99





ASSEMBLED TO STRAIGHT BACKSHELL LESS STRAIN RELIEF (SEE NOTE 7)




ASSEMBLED TO STRAIGHT BACKSHELL WITH STRAIN RELIEF (SEE NOTE 7)




ASSEMBLED TO 90° BACKSHELL WITH STRAIN RELIEF (SEE NOTE 7)

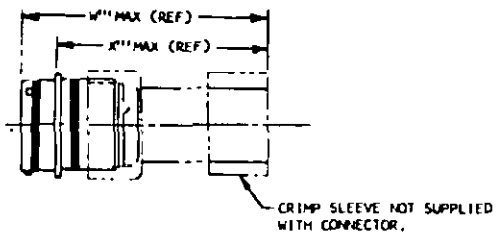


ASSEMBLED TO RFI BACKSHELL (SEE NOTE 7)

APPROVED 1 Apr 71 REVISED (D) 12 Jul 85

For changes see pages 1, 2, 3 and 4

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A Army - CR<br>Other Cust<br>Navy - AS<br>AF-85 | International interest | TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, NARROW FLANGE MOUNT, BAYONET COUPLING, CLASSES A, L, S, AND W | MILITARY STANDARD<br>MS3470 |
|---|---|---|---|
| Procurement Specification<br>MIL-C-26482 | | SUPERSEDES:<br>MS3470 (Navy), MIL-C-83723/1B, MIL-C-83723/2B | PAGE 2 OF 4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army -AV
Navy -MC
Air Force -

| Size | A | B | E | F | G | H | K | L | M |
|---|---|---|---|---|---|---|---|---|---|
| 8 | .828 (21.03) | .594 (15.08) | .589 / .599 (14.96)(15.21) | .462 / .431 (11.73)(10.95) | .078 / .046 (1.98) (1.17) | .120 (3.05) | .563 / .573 (14.30)(14.55) | 1.215 (30.86) | .110 / .130 (2.79) (3.30) |
| 10 | .954 (24.23) | .719 (18.26) | .714 / .724 (18.14)(18.39) | ↑ | ↑ | ↑ | .680 / .690 (17.27)(17.53) | ↑ | ↑ |
| 12 | 1.047 (26.59) | .812 (20.62) | .807 / .817 (20.50)(20.75) | | | | .859 / .869 (21.82)(22.07) | | |
| 14 | 1.141 (28.98) | .906 (23.01) | .901 / .911 (22.89)(23.14) | | | | .984 / .994 (24.99)(25.25) | | |
| 16 | 1.234 (31.34) | .969 (24.61) | .964 / .974 (24.49)(24.74) | ↓ | ↓ | | 1.108 /1.118 (28.14)(28.40) | ↓ | ↓ |
| 18 | 1.328 (33.73) | 1.062 (26.97) | 1.057 /1.067 (26.85)(27.10) | .462 / .431 (11.73)(10.95) | .078 / .046 (1.98) (1.17) | | 1.233 /1.243 (31.32)(31.57) | 1.215 (30.86) | |
| 20 | 1.453 (36.91) | 1.156 (29.36) | 1.151 /1.161 (29.24)(29.49) | .587 / .556 (14.91)(14.12) | .110 / .078 (2.79) (1.98) | ↓ | 1.358 /1.368 (34.49)(34.75) | 1.275 (32.39) | ↓ |
| 22 | 1.578 (40.08) | 1.250 (31.75) | 1.245 1.255 (31.62)(31.88) | .587 / .556 (14.91)(14.12) | .110 .078 (2.79) (1.98) | .120 (3.05) | 1.483 /1.493 (37.67)(37.92) | 1.275 (32.39) | .110 / .130 (2.79) (3.30) |
| 24 | 1.703 (43.26) | 1.375 (34.93) | 1.370 /1.380 (34.80)(35.05) | .620 / .589 (15.75)(14.96) | .110 / .078 (2.79) (1.98) | .147 (3.73) | 1.610 /1.620 (40.89)(41.15) | 1.275 (32.39) | .137 / .157 (3.48) (3.99) |

| Size | W | W' | W" | W'" | X | X' | X" | X'" | Y | Max. weight (lbs)* Pin | Socket |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 8 | 1.492 (37.90) | 1.842 (46.79) | 2.115 (53.72) | 2.339 (59.41) | 1.061 (26.95) | 1.411 (35.84) | 1.684 (42.77) | 1.920 (48.77) | .830 (21.08) | .0159 (0.404) | .0167 (0.424) |
| 10 | ↑ | 1.842 (46.79) | 2.115 (53.72) | ↑ | ↑ | 1.411 (35.84) | 1.684 (42.77) | ↑ | .880 (22.35) | .0227 (0.577) | .0239 (0.607) |
| 12 | | 1.842 (46.79) | 2.250 (57.15) | | | 1.411 (35.84) | 1.819 (46.20) | | .950 (24.13) | .0311 (0.790) | .0369 (0.937) |
| 14 | | 2.077 (52.76) | 2.340 (59.44) | | | 1.646 (41.81) | 1.909 (48.49) | | 1.010 (25.65) | .0392 (0.996) | .0483 (1.227) |
| 16 | ↓ | 2.077 (52.76) | 2.475 (62.87) | ↓ | ↓ | 1.646 (41.81) | 2.044 (51.92) | ↓ | 1.070 (27.18) | .0503 (1.278) | .0609 (1.547) |
| 18 | 1.492 (37.90) | 2.077 (52.76) | 2.574 (65.38) | 2.339 (59.41) | 1.061 (26.95) | 1.646 (41.81) | 2.143 (54.43) | 1.920 (48.77) | 1.130 (28.70) | .0542 (1.377) | .0699 (1.755) |
| 20 | 1.552 (39.42) | 2.137 (54.28) | 2.767 (70.28) | 2.399 (60.93) | .996 (25.30) | 1.581 (40.16) | 2.211 (56.15) | 1.855 (47.12) | 1.190 (30.23) | .0698 (1.773) | .0898 (2.281) |
| 22 | 1.552 (39.42) | 2.137 (54.28) | 2.890 (73.41) | 2.399 (60.93) | .996 (25.30) | 1.581 (40.16) | 2.334 (59.28) | 1.855 (47.12) | 1.260 (32.00) | .0797 (2.024) | .1090 (2.769) |
| 24 | 1.552 (39.42) | 2.137 (54.28) | 3.012 (76.50) | 2.399 (60.93) | .963 (24.46) | 1.548 (39.32) | 2.423 (61.54) | 1.822 (46.28) | 1.320 (33.53) | .1048 (2.662) | .1241 (3.152) |

*Less contacts and accessories. Maximum weights do not apply to class S.

APPROVED 1 Apr 71 REVISED (D) For changes see pages 1, 2, 3 and 4 12 Jul 85

P.A Army - CR
Other Cust Navy - AS AF-85
International interest

Procurement Specification: MIL-C-26482

SUPERSEDES: MS3470 (Navy), MIL-C-83723/1B, MIL-C-83723/2B

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, NARROW FLANGE MOUNT, BAYONET COUPLING, CLASSES A, L, S, AND W

MILITARY STANDARD

MS3470

PAGE 3 OF 4

FED. SUP CLASS 5935


DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

TABLE I. Reduced diameters (XX).

| Shell size | Insert arrangements | Contact cavities |
|---|---|---|
| 8 | -33 & -98 | A, B, C |
| 12 | -10 | C, G |
| 14 | -12 | A, B, C, D, E, F, G, H |
| 14 | -18 | A, C, E, G, J, L |
| 14 | -19 | B, D, F, H, K, M |
| 16 | -26 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R |
| 18 | -32 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T |
| 22 | -41 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y |

*Connector part numbering:*

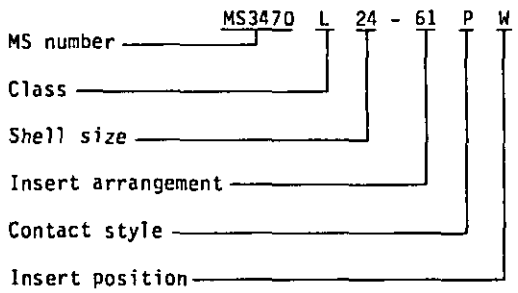


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals, angular tolerances are ±0° ±1° and 0° 0' ±30'.
3. True position (TP) tolerances specified are in accordance with ANSI Y14.5-1973.
4. Polarizing stripe, color optional.
5. Color band: .070 ±.031 wide, color blue. Band location must be such that it is visible when mounting.
6. Insert arrangements requiring reduced diameters for raised seal barriers or lead-in chamfer on outer row of contact cavities as indicated. (See table I).
7. Connector assembly must be used with a backshell. Backshell must be procured separately. See MIL-C-85049 for applicable backshells.
8. Intermateability and rear accessory interchangeability dimensions shall be in accordance with MIL-C-26482.
9. For insert arrangements see MIL-STD-1669.
10. Connector identification marking shall be in accordance with MIL-C-26482. Example: MS3470 L----, M83723-01 R----, (minimum height does not apply to shell sizes 8, 10 and 12).
11. Class E cancelled and replaced by class L.
12. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
13. Referenced documents shall be of the issue in effect on date of invitations for bids.
14. Metric equivalents are given for general information only.
15. Metric equivalents are in parentheses.

APPROVED 1 Apr 71 REVISED (D) 12 Jul 85
For changes see pages 1, 2, 3 and 4

User activities: Army - AV, Navy - MC, Air Force -
Review activities: Army - AR, Navy - EC, Air Force - SH
11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P.A Army - CR<br>Other Cust<br>Navy - AS<br>AF-85 | International interest | TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, CRIMP TYPE, NARROW FLANGE MOUNT, BAYONET COUPLING, CLASSES A, L, S, AND W | MILITARY STANDARD<br>MS3470 |
| Procurement Specification<br>MIL-C-26482 | | SUPERSEDES:<br>MS3470 (Navy), MIL-C-83723/1B, MIL-C-83723/2B | PAGE 4 OF 4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.