
FED. SUP CLASS
5305

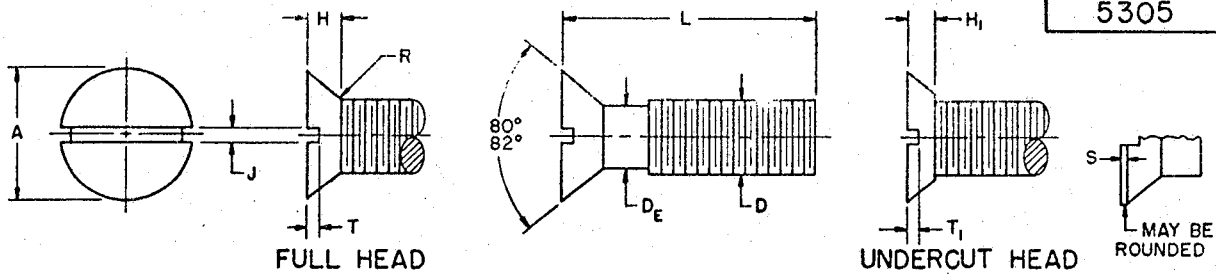

			#0 (.0600)	#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)
NOMINAL SIZE D										
THREADS PER INCH			80NF	72NF	64NF	48NF	40NF	36NF	32NF	28UNF
BODY DIAMETER D_E		Max	.0600	.0730	.0860	.1120	.1380	.1640	.1900	.2500
		Min	.0496	.0615	.0733	.0954	.1184	.1424	.1658	.2225
HEAD DIAMETER A		Max Sharp	.119	.146	.172	.225	.279	.332	.385	.507
		Min Sharp	.105	.130	.156	.207	.257	.308	.359	.477
		Abs Min	.101	.126	.150	.200	.249	.300	.348	.462
SLOT WIDTH J		Max	.023	.026	.031	.039	.048	.054	.060	.075
		Min	.016	.019	.023	.031	.039	.045	.050	.064
FLAT	S	Max	.002	.003	.003	.004	.005	.006	.007	.009
RADIUS	R	Max	.025	.027	.031	.041	.050	.055	.062	.071
FULL HEAD — HEAD HEIGHT	H	Max	.035	.043	.051	.067	.083	.100	.116	.153
		Min	.026	.033	.040	.055	.069	.084	.098	.131
FULL HEAD — SLOT DEPTH	T	Max	.015	.019	.023	.030	.038	.045	.053	.070
		Min	.010	.012	.015	.020	.024	.029	.034	.046
UNDERCUT HEAD — HEAD HEIGHT	H_1	Max	.026	.032	.037	.048	.060	.071	.083	.108
		Min	.017	.022	.026	.036	.046	.055	.065	.086
UNDERCUT HEAD — SLOT DEPTH	T_1	Max	.012	.016	.019	.025	.032	.037	.044	.058
		Min	.010	.012	.015	.020	.024	.029	.034	.046

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

Length L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1/8		1	6	13	22	33	48		
3/16		2	7	14	23	34	49	67	
1/4		3	8	15	24	35	50	68	85
5/16		4	9	16	25	36	51	69	86
3/8	+0	5	10	17	26	37	52	70	87
7/16	-1/32		11	18	27	38	53	71	88
1/2			12	19	28	39	54	72	89
5/8				20	29	40	55	73	90
3/4				21	30	41	56	74	91
7/8					31	42	57	75	92
1					32	43	58	76	93
1-1/4	+0					44	59	77	94
1-1/2	-1/16					45	60	78	95
1-3/4						46	61	79	96
2						47	62	80	97
Minimum complete thread length of 1-3/4. — 2-1/4	+0 -3/32						63	81	98
2-1/2							64	82	99
2-3/4							65	83	100
3							66	84	101

Ⓐ CANCELLED
SEE SHEET 2

MATERIAL: Brass, Specification QQ-B-611 or QQ-W-321.
FINISH: Plain (untreated).
THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.
NOTES: (1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35246-1.
(4) Sizes above dotted line have undercut head.
(5) All dimensions in inches.

Ⓐ For changes see sheets 1 and 2.

APPROVED FEB 9, 1954 REVISED Ⓐ 25 MARCH 63 M

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	Ships MOAMA

TITLE
SCREW, MACHINE FLAT COUNTERSUNK HEAD, SLOTTED, BRASS, PLAIN FINISH, NF-2A AND UNF-2A

MILITARY STANDARD
MS 35246

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOMINAL SIZE D			5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
THREADS PER INCH			24UNF	24UNF	20UNF	20UNF	18UNF	18UNF	16UNF
BODY DIAMETER D_E		Max	.3125	.3750	.4375	.5000	.5625	.6250	.7500
		Min	.2806	.3430	.3995	.4619	.5205	.5828	.7029
HEAD DIAMETER A		Max Sharp	.635	.762	.812	.875	1.000	1.125	1.375
		Min Sharp	.600	.722	.771	.831	.950	1.069	1.306
		Abs Min	.581	.700	.743	.802	.919	1.035	1.267
SLOT WIDTH J		Max	.084	.094	.094	.106	.118	.133	.149
		Min	.072	.081	.081	.091	.102	.116	.131
FLAT S		Max	.011	.013	.016	.018	.020	.023	.027
RADIUS R		Max	.083	.083	.100	.100	.110	.110	.125
FULL HEAD	HEAD HEIGHT H	Max	.191	.230	.223	.223	.260	.298	.372
		Min	.165	.200	.190	.186	.220	.253	.319
	SLOT DEPTH T	Max	.088	.106	.103	.103	.120	.137	.171
		Min	.058	.070	.066	.065	.077	.088	.111
UNDERCUT Head	HEAD HEIGHT H_1	Max	.135	.162	.156	.160	.185	.212	.264
		Min	.109	.132	.126	.123	.145	.167	.211
	SLOT DEPTH T_1	Max	.073	.088	.085	.085	.100	.114	.142
		Min	.058	.070	.066	.065	.077	.088	.111

Length L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.						Ⓐ CANCELLED SEE NOTE		
1/8	+0 -1/32	102						
3/16		103						
1/4		104	117					
5/16		105	118	130				
3/8		106	119	131	142			
7/16		107	120	132	143	153	163	
1/2		108	121	133	144	154	164	173
5/8		109	122	134	145	155	165	174
3/4		110	123	135	146	156	166	175
7/8		111	124	136	147	157	167	176
1		112	125	137	148	158	168	177
1-1/4	+0 -1/16	113	126	138	149	159	169	178
1-1/2		114	127	139	150	160	170	179
1-3/4		115	128	140	151	161	171	180
2		116	129	141	152	162	172	181
Minimum complete thread length of 1-3/4.								
2-1/4	+0 -3/32							
2-1/2								
2-3/4								
3								

NOTE: For illustration, material, finish, and other pertinent data see sheet 1.

Ⓐ CANCELLED AFTER 25 Mar 63 USE MS 35199. INTERCHANGEABILITY RELATIONSHIP-MS 35199 can replace the cancelled screws of the same size. The cancelled MS 35246 cannot always replace MS 35199 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

APPROVED FEB 9, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2. M

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust Ships MOAMA	TITLE SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, BRASS, PLAIN FINISH, NF-2A AND UNF-2A	MILITARY STANDARD MS 35246	
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:	SHEET 2 OF	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.