
FED. SUP CLASS 5305

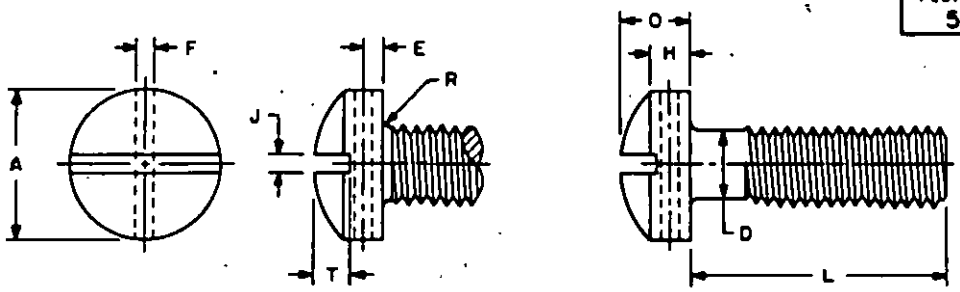

REVIEWER: AV, EL, IS, AS, AT, MC, ME, MU, 03, SH, WV, YD
USER:

TABLE I

	NOMINAL SIZE		.086	.112	.138	.164	.190	.250	.3125	.375
	THREADS PER INCH, UNF-2A		64	48	40	36	32	28	24	24
D	BODY DIAMETER	MAX	.0860	.1120	.1380	.1640	.1900	.2500	.3125	.3750
		MIN	.0733	.0954	.1184	.1424	.1658	.2225	.2806	.3430
A	HEAD DIAMETER	MAX	.140	.183	.226	.270	.313	.414	.518	.622
		MIN	.124	.166	.208	.250	.292	.389	.490	.590
H	HEAD SIDE HEIGHT	MAX	.062	.079	.096	.113	.130	.170	.211	.253
		MIN	.055	.072	.089	.106	.123	.161	.201	.242
O	TOTAL HEAD HEIGHT	MAX	.083	.107	.132	.156	.180	.237	.295	.355
		MIN	.070	.094	.118	.141	.165	.219	.276	.333
J	SLOT WIDTH	MAX	.031	.039	.048	.054	.060	.075	.084	.094
		MIN	.023	.031	.039	.045	.050	.064	.072	.081
T	SLOT DEPTH	MAX	.030	.038	.045	.065	.075	.102	.130	.154
		MIN	.022	.030	.035	.054	.064	.087	.110	.134
E	DRILL LOCATION	NOM	.026	.035	.043	.043	.043	.062	.078	.094
F	DRILLED HOLE DIA	NOM	.031	.037	.046	.046	.046	.062	.070	.070
R	RADIUS	MAX	.013	.017	.021	.025	.028	.038	.047	.056
	TENSILE STRENGTH, LBS-MIN (C)		230	390	600	880	1,200	2,180	3,480	5,250

LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.12	+.00 -.03	1	11	24	39				
.19		2	12	25	40	58			
.25		3	13	26	41	59			
.31		4	14	27	42	60	76		
.38		5	15	28	43	61	77	92	
.44		6	16	29	44	62	78	93	
.50		7	17	30	45	63	79	94	107
.62		8	18	31	46	64	80	95	108
.75		9	19	32	47	65	81	96	109
.88		10	20	33	48	66	82	97	110
1.00			21	34	49	67	83	98	111
1.25	+.00 -.06		22	35	50	68	84	99	112
1.50			23	36	51	69	85	100	113
1.75				37	52	70	86	101	114
2.00				38	53	71	87	102	115
2.25	+.00 -.09				54	72	88	103	116
2.50					55	73	89	104	117
2.75					56	74	90	105	118
3.00					57	75	91	106	119

(C) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 9 FEB 1954 REVISED (A) 15 JUN 1962 (B) 12 NOV 1964 (C) 6 MAR 1974

P.A. MC
Other Coast 82

TITLE
SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, UNF-2A

MILITARY STANDARD
MS35266

PROCUREMENT SPECIFICATION FF-S-92

SUPERSEDES: See Note 10

SHEET 1 OF 3

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

NOTES:

(C) 1. MATERIAL: Carbon steel in accordance with Fed. Std. No. 66. The minimum ultimate tensile strength shall be 60,000 PSI.

(C) 2. PROTECTIVE COATING: Cadmium plated in accordance with QQ-P-416, Type II, Class 3.

3. THREADS: The threads shall be in accordance with Screw-Thread Standards For Federal Services, Handbook H28.

4. DIMENSIONS: All dimensions in Table I are in inches. All dimensions in Table II are in millimetres.

5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35266-1.

(C) 6. THREAD LENGTH: Full form threads shall extend to within 2 threads or less of head bearing surface for lengths thru 2.00 inches/50.80 millimetres. Longer lengths shall have a minimum full form thread length of 1.50 inches/38.10 millimetres.

7. The drilled hole shall be approximately at a right angle to the slot and may be permitted to break through the bottom of the slot. All burrs and sharp edges shall be removed.

8. Referenced documents shall be of the issue in effect on date of invitations for bid.

9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

10. MS35264, MS35268, MS35270, BCCX1.2, BCCX1.3, BCCX1.6, BCCX1.9, BCCX2 and in part AN501, MS35361, MS35366, BCFX5, BCFX7 and BCHX2.

REVIEWER: AT, EL, IS
USER: AS, AT, MC, ME, MU, OS, SH, WV, YD

(C) TABLE II
METRIC TRANSLATION OF TABLE I

	NOMINAL SIZE		2.18	2.84	3.51	4.17	4.83	6.35	7.94	9.52
	THREAD PITCH		.40	.53	.64	.71	.79	.91	1.06	1.06
D	BODY DIAMETER	MAX	2.18	2.84	3.51	4.17	4.83	6.35	7.94	9.52
		MIN	1.86	2.42	3.01	3.62	4.21	5.63	7.13	8.71
A	HEAD DIAMETER	MAX	3.56	4.65	5.74	6.86	7.95	10.52	13.16	15.80
		MIN	3.15	4.22	5.28	6.35	7.42	9.88	12.45	14.99
H	HEAD SIDE HEIGHT	MAX	1.57	2.01	2.44	2.87	3.30	4.32	5.36	6.43
		MIN	1.40	1.83	2.26	2.69	3.12	4.09	5.11	6.15
O	TOTAL HEAD HEIGHT	MAX	2.11	2.72	3.35	3.96	4.57	6.02	7.49	9.02
		MIN	1.78	2.39	3.00	3.58	4.19	5.56	7.01	8.46
J	SLOT WIDTH	MAX	.79	.99	1.22	1.37	1.52	1.90	2.13	2.39
		MIN	.58	.79	.99	1.14	1.27	1.63	1.83	2.06
T	SLOT DEPTH	MAX	.76	.97	1.14	1.65	1.90	2.59	3.30	3.91
		MIN	.56	.76	.49	1.37	1.63	2.21	2.79	3.40
E	DRILL LOCATION	NOM	.66	.89	1.09	1.09	1.09	1.57	1.98	2.39
F	DRILLED HOLE DIA	NOM	.79	.94	1.17	1.17	1.17	1.57	1.78	1.78
R	RADIUS	MAX	.33	.43	.43	.64	.71	.97	1.19	1.42

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
3.05	+.00 -.76	1	11	24	39				
4.83		2	12	25	40	58			
6.35		3	13	26	41	59			
7.87		4	14	27	42	60	76		
9.65		5	15	28	43	61	77	92	
11.18		6	16	29	44	62	78	93	
12.70		7	17	30	45	63	79	94	107
15.75		8	18	31	46	64	80	95	108
19.05		9	19	32	47	65	81	96	109
22.35		10	20	33	48	66	82	97	110
25.40			21	34	49	67	83	98	111
31.75	+.00 -1.52		22	35	50	68	84	99	112
38.10			23	36	51	69	85	100	113
44.45				37	52	70	86	101	114
50.80				38	53	71	87	102	115
57.15	+.00 -2.29				54	72	88	103	116
63.50					55	73	89	104	117
69.85					56	74	90	105	118
76.20					57	75	91	106	119

APPROVED 9 FEB 1954 REVISED (A) 15 JUN 1962 (B) 12 NOV 1964 (C) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC Other Cust 82	TITLE SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, UNF-2A	MILITARY STANDARD MS35266
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: See note 10	SHEET 2 OF 3

DD FORM 672-1 (Commercial)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

REVIEWER: AV, EL, IS
USER: AS, AT, MC, ME, MU, OS, SH, WV, YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 9 FEB 1954 REVISED (A) 15 JUN 1962 (B) 12 NOV 1964 (C) FOR CHANGES SEE SHEETS 1 AND 2.

INTERCHANGEABILITY

Screws covered by dash numbers given in MS35264, MS35268, MS35270 and in part AN501 are canceled after 12 November 1964. The canceled screws cannot always replace the new screws and should be used until existing stocks are depleted. Use only the new screws for new design and replacement. Replacement shall be in accordance with Table III.

TABLE III

PART NUMBER		PART NUMBER			PART NUMBER		
CANCELED	SUPERSEDED BY	CANCELED		SUPERSEDED BY	CANCELED		SUPERSEDED BY
MS35264 MS35268 MS35270	MS35266	MS35264 MS35268 MS35270	AN501	MS35266	MS35264 MS35268 MS35270	AN501	MS35266
1	1	44		44		A416-18	NR
2	2	45		45	84	A416-20	84
3	3	46		46		A416-22	NR
4	4	47		47	85	A416-24	85
5	5	48		48	86	A416-28	86
6	6	49		49	87	A416-32	87
7	7	50		50	88		88
8	8	51		51	89	A416-40	89
9	9	52		52	90		90
10	10	53		53	91	A416-48	91
				54	92		92
11	11	54		55	93		93
12	12	55		56	94	A516-8	94
13	13	56		57	95	A516-10	95
14	14	57		58	96	A516-12	96
15	15	58		59	97	A516-14	97
16	16	59	A10-4	60	98	A516-16	98
17	17	60	A10-5	61		A516-18	NR
18	18	61	A10-6	62	99	.516-20	99
19	19	62	A10-7	63		A516-22	NR
20	20	63	A10-8	64	100	A516-24	100
21	21	64	A10-10	65	101	A516-28	101
22	22	65	A10-12	66	102	A516-32	102
23	23	66	A10-14	67	103		103
24	24	67	A10-16	NR	104	A516-40	104
25	25		A10-18	68	105		105
26	26	68	A10-20	NR	106	A516-48	106
27	27		A10-22	69	107	A616-8	107
28	28	69	A10-24	70	108	A616-10	108
29	29	70	A10-28	71	109	A616-12	109
30	30	71	A10-32	72	110	A616-14	110
31	31	72		73	111	A616-16	111
32	32	73	A10-40	74		A616-18	NR
33	33	74		75	112	A616-20	112
34	34	75	A10-48	76		A616-22	NR
35	35	76	A416-5	77	113	A616-24	113
36	36	77	A416-6	78	114	A616-28	114
37	37	78	A416-7	79	115	A616-32	115
38	38	79	A416-8	80	116		116
39	39	80	A416-10	81	117	A616-40	117
40	40	81	A416-12	82	118		118
41	41	82	A416-14	83	119	A616-48	119
42	42	83	A416-16				
43	43						

NR = No Replacement

P.A. VC	TITLE	MILITARY STANDARD
Other Cust 92	SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, UNF-2A	MS 35266
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: See Note 10	SHEET 3 OF 3

DD FORM 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Rock Island Arsenal
ATTN: SARRI-LE-SC
Rock Island, Illinois 61201

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MS35266 Rev C, Screw, Machine-Drilled Fillister Head, Slotted, Carbon Steel, UNF-2A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.